

TWM/TWW Series

Ceramic Housed Radial Terminal Power




The TWM/TWW series radial terminal power resistors offer significant board space savings over axial terminal products. Generated heat is also kept away from the circuit board.

They are recommended for commercial applications requiring low cost.

FEATURES

- Economical Commercial Grade for general purpose use
- Wirewound and Metal Oxide construction
- Wide resistance range
- Flameproof inorganic construction

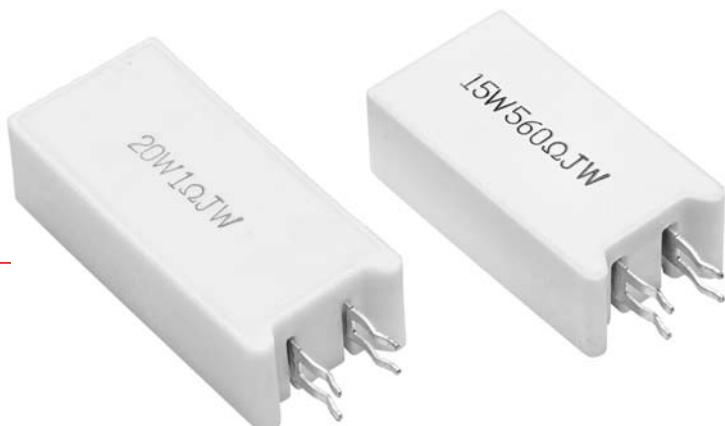


SERIES SPECIFICATIONS

Series	Wattage	Resistance	Voltage	Element
TWW3	3	0.01-39Ω	250	Wire
TWW5	5	0.01-47Ω	350	Wire
TWW10	10	0.04-990Ω	750	Wire
TWW15	15	0.1Ω-560Ω	700	Wire
TWW20	20	0.1Ω-560Ω	750	Wire
TWM3	3	43-50KΩ	250	Metal oxide
TWM5	5	51-50KΩ	350	Metal oxide
TWM10	10	1000-50KΩ	750	Metal oxide
TWM15	15	561Ω-200KΩ	700	Metal oxide
TWM20	20	561Ω-200KΩ	750	Metal oxide

CHARACTERISTICS

Housing	Ceramic
Core	Fiberglass
Filling	Cement based
Tolerance	5% standard
Temperature coefficient	0.01-20Ω ±400ppm/°C; >20-10Ω ±350ppm/°C
Dielectric withstand voltage	1,000VAC
Short time overload	TWW: 10x rated power for 5 sec.; TWM: 5x rated power for 5 sec. 15 & 20 watt: 2.5x RCWV for 5 sec.
Operating Temperature	-55°C to 275°C
Storage Temperature	15°C-35°C, humidity: 25%-75%

Derating





(continued)

TWM/TWW Series

Ceramic Housed Radial Terminal Power

DIMENSIONS

3-10 watt Series	Height (in./mm) ±1mm	Width (in./mm)
TWW3	0.98 / 25	0.33 / 8.5
TWW5	0.98 / 25	0.35 / 9
TWW10	1.97 / 50	0.35 / 9
TWM3	0.98 / 25	0.33 / 8.5
TWM5	0.98 / 25	0.35 / 9
TWM10	1.97 / 50	0.35 / 9

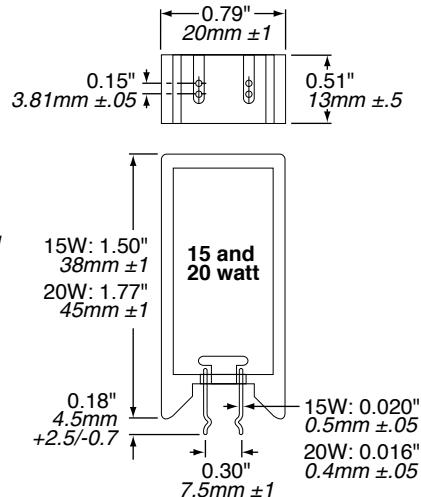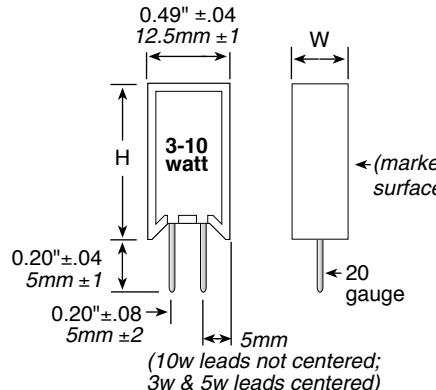

HOW TO ORDER

Tolerance
 J = 5% E = RoHS compliant
T W W 3 J R 0 5 E
 Series Wattage Resistance Value
 TWM = Ceramic housed metal oxide radial 3 Example:
 TWW = Ceramic housed wirewound radial 5 R05 = 0.05Ω
 10 R56 = 0.56Ω
 1R0 = 1Ω
 8R2 = 8.2Ω
 270 = 270Ω
 1K0 = 1,000Ω
 8K2 = 8,200Ω
 10K = 10,000Ω

Standard part numbers for TWW series

Ohmic value	Part No. Prefix ▶ Suffix ▼	TWW3J- TWW5J- TWW10J- TWW15J- TWW20J- 20	Ohmic value	Part No. Prefix ▶ Suffix ▼	TWW3J- TWW5J- TWW10J- TWW15J- TWW20J- 20	Ohmic value	Part No. Prefix ▶ Suffix ▼	TWW3J- TWW5J- TWW10J- TWW15J- TWW20J- 20
0.01 — R01E	✓ ✓		2.0 — 2R0E	✓ ✓ ✓ ✓		47 — 47RE	✓ ✓ ✓	
0.02 — R02E	✓ ✓		2.7 — 2R7E	✓ ✓ ✓ ✓	✓	51 — 51RE		✓
0.03 — R03E	✓ ✓		3.0 — 3R0E	✓ ✓ ✓ ✓		56 — 56RE	✓	
0.04 — R04E	✓ ✓ ✓		3.3 — 3R3E	✓ ✓ ✓ ✓		68 — 68RE	✓	
0.05 — R05E	✓ ✓ ✓		3.9 — 3R9E	✓ ✓ ✓		75 — 75RE	✓	✓
0.10 — R10E	✓ ✓ ✓ ✓ ✓		4.3 — 4R3E	✓ ✓ ✓		82 — 82RE	✓	
0.15 — R15E	✓ ✓ ✓ ✓ ✓		4.7 — 4R7E	✓ ✓ ✓		100 — 100E	✓	✓
0.20 — R20E	✓ ✓ ✓ ✓		5.6 — 5R6E	✓ ✓ ✓		150 — 150E	✓	✓
0.27 — R27E	✓ ✓ ✓ ✓	✓	6.8 — 6R8E	✓ ✓ ✓		200 — 200E	✓	
0.30 — R30E	✓ ✓ ✓		7.5 — 7R5E	✓ ✓ ✓		270 — 270E	✓	✓
0.33 — R33E	✓ ✓ ✓		8.2 — 8R2E	✓ ✓ ✓		300 — 300E	✓	
0.39 — R39E	✓ ✓ ✓		10 — 10RE	✓ ✓ ✓ ✓ ✓		330 — 330E	✓	
0.43 — R43E	✓ ✓ ✓		15 — 15RE	✓ ✓ ✓ ✓ ✓		390 — 390E	✓	
0.47 — R47E	✓ ✓ ✓ ✓		20 — 20RE	✓ ✓ ✓		430 — 430E	✓	
0.56 — R56E	✓ ✓ ✓	✓	22 — 22RE	✓		470 — 470E	✓	
0.68 — R68E	✓ ✓ ✓		27 — 27RE	✓ ✓ ✓ ✓ ✓		500 — 500E		
0.75 — R75E	✓ ✓ ✓		30 — 30RE	✓ ✓ ✓		560 — 560E	✓	
0.82 — R82E	✓ ✓ ✓		33 — 33RE	✓ ✓ ✓		680 — 680E	✓	
1.0 — 1R0E	✓ ✓ ✓	✓	39 — 39RE	✓ ✓ ✓		750 — 750E	✓	
1.5 — 1R5E	✓ ✓ ✓	✓	43 — 43RE	✓ ✓		820 — 820E	✓	

Standard part numbers for TWM series

Ohmic value	Part No. Prefix ▶ Suffix ▼	TWM3J- TWM5J-	Wattage	Ohmic value	Part No. Prefix ▶ Suffix ▼	TWM3J- TWM5J-	Wattage	Ohmic value	Part No. Prefix ▶ Suffix ▼	TWM3J- TWM5J-	Wattage
43 — 43RE	✓			1000 — 1K0	✓	✓	✓	1000 — 1K0	✓	✓	✓
47 — 47RE	✓			1500 — 1K5	✓	✓	✓	1500 — 1K5	✓	✓	✓
56 — 56RE	✓	✓		2000 — 2K0	✓	✓	✓	2000 — 2K0	✓	✓	✓
68 — 68RE	✓	✓		2700 — 2K7	✓	✓	✓	2700 — 2K7	✓	✓	✓
75 — 75RE	✓	✓		3000 — 3K0	✓	✓	✓	3000 — 3K0	✓	✓	✓
82 — 82RE	✓	✓		3300 — 3K3	✓	✓	✓	3300 — 3K3	✓	✓	✓
100 — 100E	✓	✓		3900 — 3K9	✓	✓	✓	3900 — 3K9	✓	✓	✓
150 — 150E	✓	✓		4300 — 4K3	✓	✓	✓	4300 — 4K3	✓	✓	✓
200 — 200E	✓	✓		4700 — 4K7	✓	✓	✓	4700 — 4K7	✓	✓	✓
270 — 270E	✓	✓		5600 — 5K6	✓	✓	✓	5600 — 5K6	✓	✓	✓
300 — 300E	✓	✓		5100 — 5K1				5100 — 5K1			
330 — 330E	✓	✓		6800 — 6K8	✓	✓	✓	6800 — 6K8	✓	✓	✓
390 — 390E	✓	✓		7500 — 7K5	✓	✓	✓	7500 — 7K5	✓	✓	✓
430 — 430E	✓	✓		8200 — 8K2	✓	✓	✓	8200 — 8K2	✓	✓	✓
470 — 470E	✓	✓		10000 — 10K	✓	✓	✓	10000 — 10K	✓	✓	✓
560 — 560E	✓	✓		27000 — 27K				27000 — 27K			
680 — 680E	✓	✓		47000 — 47K				47000 — 47K			
750 — 750E	✓	✓		51000 — 51K				51000 — 51K			
820 — 820E	✓	✓		75000 — 75K				75000 — 75K			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Metal Oxide Resistors category:

Click to view products by Ohmite manufacturer:

Other Similar products are found below :

[009260C FA87/180R/5%](#) [SBL4R010J 281-1.0K](#) [R0229 M012CT52R220J](#) [WK80922003900J5C00 434529B](#) [WMO5S-100KJA05 054084X](#)
[054211G 054220E](#) [095734G WK202070A1003JD500](#) [WR404140A2208JFE00 MOSX1CT528R2R20F](#) [RSF5SSJT-73-170R RSF-25JT-52-](#)
[330RW RSF200JT-73-0R52](#) [ROX2SJ4K3 ROX5SJ120R](#) [ROX3SJR10 ROX2SJ200K](#) [RSF200JT-73-0R27 RSF1WSJT-52-140R](#) [RSF50SJT-](#)
[52-0R1 RSF50SJT-52-0R39](#) [RSF100JT-73-8R2 RSF50SJT-52-200K](#) [RSF-50JT-52-2M RSF50SJT-52-820K](#) [RSF-50JT-52-2R2](#)
[ROX05SJ110R ROX05SJ130R](#) [ROX05SJ200R ROX05SJ240R](#) [ROX05SJ270R ROX05SJ360R](#) [ROX05SJ390R ROX05SJ430R](#)
[ROX05SJ470R ROX05SJ510R](#) [ROX05SJ560R ROX05SJ620R](#) [ROX05SJ820R ROX05SJ1K1](#) [ROX05SJ1K2 ROX05SJ1K3](#) [ROX05SJ1K6](#)
[ROX05SJ2K4](#)