

PRODUCT RANGE (RATINGS @ 85°C)				
TYPE	CONTINUOUS		TRANSIENT	
	RMS VOLTAGE (VOLTS)	DC VOLTAGE (VOLTS)	ENERGY (10/1000ms) (JOULES)	PEAK CURRENT (8/20ms) (AMPS)
DVS 24	30	38	8.8	1000
DVS 48	60	81	20	4500
DVS 110	150	200	80	6500
DVS 240	275	369	140	6500

SPECIFICATION

LINE FREQUENCY DC TO 4.40KHZ

TEMPERATURE RANGE -25C TO +85C

WIRE GAUGE 12 AWG

MOUNTING EN 50 022 RAIL (TOP HAT)

SCREW TERMINALS 2.5sq.mm (12 AWG)

ALL DIMENSIONS IN MM / ANGLES IN DECIMAL DEGREES

DrngNo DVS-GS


TITLE DIMENSIONS FOR DVS24,48,110,240




GENERAL SPECIFICATION FOR DVS

CUSTOMER FILTER REF

ELECTRICAL CONNECTION



EXAMPLE

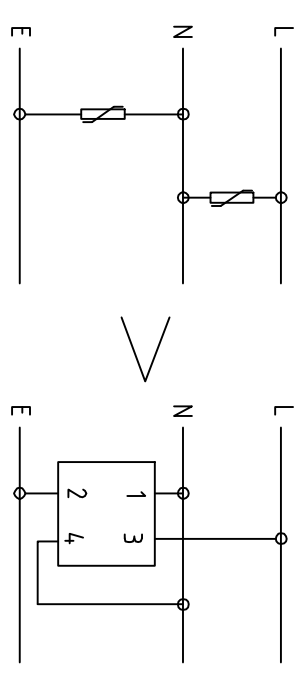

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [roxburgh](#) manufacturer:

Other Similar products are found below :

[RES20F06](#) [RES90F10](#) [KMF3100](#) [RIS0622H2](#) [XE12001](#) [SF1121](#) [RES5-FO8](#) [DRF10](#) [CMV10](#) [DVS24](#) [C225](#) [RES20F16](#) [RES20F10](#)
[DVS240](#) [XEB01010](#) [DRF08](#) [RES5-F15](#) [RIP0642H2](#) [DRF06](#) [C215](#) [RES10F06](#) [RES30F03](#) [XE0475](#) [RID-0342-H](#) [RES5-F10](#) [RIR-0622-H](#)
[XE01010](#) [SMV20](#) [SF1123](#) [CMV30](#) [RIR-0222-H](#) [SF1122](#) [SMV40](#) [RIQ-0442-H2](#) [RX730RC+CLIP](#) [SMV10](#) [3CRH30330](#) [CMV20](#) [XE1201](#)
[RE1201](#)