


Radial Lead Type

Series: **SU(Bi-polar)** Type: **A**

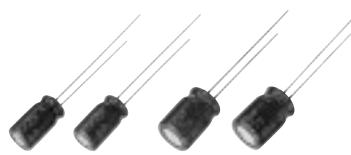


■ Features

- Endurance : 85 °C 2000 h
- RoHS directive compliant

■ Specifications

Category	Temp. Range	-40 °C to +85 °C
Rated W.V. Range		6.3 V.DC to 50 V.DC
Nominal Cap. Range		0.47 µF to 6800 µF
Capacitance Tolerance		±20 % (120 Hz/+20 °C)
DC Leakage Current		I ≤ 0.03 CV +3 (µA) After 5 minutes
tan δ		Please see the attached standard products list.
Endurance		After 2000 hours application of DC working voltage (1000 hours for each polarity) at +85 °C±2 °C, when the capacitors are restored to 20 °C, the capacitors shall meet the following limits. Capacitance change ± 20 % of initial measured value tan δ ≤ 150 % of initial specified value DC leakage current ≤ initial specified value
Shelf Life		After storage for 1000 hours at +85 °C±2 °C with no voltage applied and then being stabilized at +20 °C capacitors shall meet the limits specified in Endurance. (With voltage treatment)

■ Dimensions in mm (not to scale)

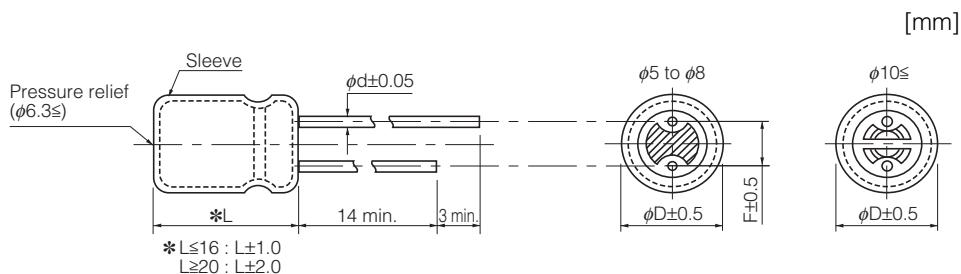

	(mm)							
Body Dia. φD	5	6.3	8	10	12.5	16	18	
Lead Dia. φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	
Lead space F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	

■ Standard Products (Bi-polar)

W.V. (V)	Cap. (±20 %) (μF)	Case size		Specification		Lead Length			Part No.	Min. Packaging Q'ty	
		Dia. (mm)	Length (mm)	Ripple Current (120 Hz) (+85 °C)	tan δ (120 Hz) (+20 °C)	Lead Dia. (mm)	Lead Space			Straight Leads (pcs)	Taping (pcs)
				(mA r.m.s.)	(Ω)		Straight (mm)	Taping *B (mm)	Taping *i (mm)		
6.3	330	8	11.5	250	0.30	0.6	3.5	5.0		ECEA0JN331U()	200 1000
	470	10	12.5	310	0.30	0.6	5.0	5.0		ECEA0JN471X()	200 500
	1000	10	20	430	0.30	0.6	5.0	5.0		ECEA0JN102U()	200 500
	2200	12.5	25	660	0.32	0.6	5.0	5.0		ECEA0JN222U()	200 500
	3300	16	25	760	0.34	0.8	7.5	7.5		ECEA0JN332U()	100 250
	4700	16	31.5	1170	0.36	0.8	7.5			ECEA0JN472U	100
	6800	18	35.5	1450	0.40	0.8	7.5			ECEA0JN682U	50
10	47	5	11	90	0.25	0.5	2.0	5.0	2.5	ECEA1AN470U()	200 2000
	100	6.3	11.2	130	0.25	0.5	2.5	5.0	2.5	ECEA1AN101X()	200 2000
	220	8	11.5	200	0.25	0.6	3.5	5.0		ECEA1AN221U()	200 1000
	330	10	16	280	0.25	0.6	5.0	5.0		ECEA1AN331U()	200 500
	470	10	16	340	0.25	0.6	5.0	5.0		ECEA1AN471U()	200 500
	1000	12.5	20	470	0.25	0.6	5.0	5.0		ECEA1AN102X()	200 500
	2200	16	25	690	0.27	0.8	7.5	7.5		ECEA1AN222U()	100 250
	3300	16	31.5	1090	0.29	0.8	7.5			ECEA1AN332U	100
	4700	18	35.5	1200	0.31	0.8	7.5			ECEA1AN472U	50
16	10	5	11	40	0.20	0.5	2.0	5.0	2.5	ECEA1CN100U()	200 2000
	22	5	11	60	0.20	0.5	2.0	5.0	2.5	ECEA1CN220U()	200 2000
	33	5	11	80	0.20	0.5	2.0	5.0	2.5	ECEA1CN330U()	200 2000
	47	6.3	11.2	100	0.20	0.5	2.5	5.0	2.5	ECEA1CN470U()	200 2000
	220	10	12.5	260	0.20	0.6	5.0	5.0		ECEA1CN221X()	200 500
	330	10	16	330	0.20	0.6	5.0	5.0		ECEA1CN331U()	200 500
	470	10	20	380	0.20	0.6	5.0	5.0		ECEA1CN471U()	200 500
	1000	12.5	25	560	0.20	0.6	5.0	5.0		ECEA1CN102U()	200 500
	2200	16	31.5	750	0.22	0.8	7.5			ECEA1CN222U	100
25	3300	18	35.5	900	0.24	0.8	7.5			ECEA1CN332U	50
	10	5	11	45	0.15	0.5	2.0	5.0	2.5	ECEA1EN100U()	200 2000
	22	5	11	60	0.15	0.5	2.0	5.0	2.5	ECEA1EN220X()	200 2000
	33	6.3	11.2	90	0.15	0.5	2.5	5.0	2.5	ECEA1EN330U()	200 2000
	47	6.3	11.2	110	0.15	0.5	2.5	5.0	2.5	ECEA1EN470U()	200 2000
	100	8	11.5	180	0.15	0.6	3.5	5.0		ECEA1EN101U()	200 1000
	220	10	16	320	0.15	0.6	5.0	5.0		ECEA1EN221U()	200 500
	330	12.5	20	350	0.15	0.6	5.0	5.0		ECEA1EN331U()	200 500
	470	12.5	20	430	0.15	0.6	5.0	5.0		ECEA1EN471U()	200 500
35	1000	16	25	680	0.15	0.8	7.5	7.5		ECEA1EN102U()	100 250
	2200	18	35.5	900	0.17	0.8	7.5			ECEA1EN222U	50
	10	5	11	43	0.15	0.5	2.0	5.0	2.5	ECEA1VN100U()	200 2000
	22	6.3	11.2	80	0.15	0.5	2.5	5.0	2.5	ECEA1VN220U()	200 2000
	33	8	11.5	100	0.15	0.6	3.5	5.0		ECEA1VN330U()	200 1000
	47	8	11.5	120	0.15	0.6	3.5	5.0		ECEA1VN470U()	200 1000
	100	10	16	230	0.15	0.6	5.0	5.0		ECEA1VN101U()	200 500
35	220	12.5	20	360	0.15	0.6	5.0	5.0		ECEA1VN221U()	200 500
	330	12.5	20	450	0.15	0.6	5.0	5.0		ECEA1VN331U()	200 500
	470	12.5	25	590	0.15	0.6	5.0	5.0		ECEA1VN471U()	200 500

Endurance: 85 °C 2000 h (1000 hours for each polarity)

When requesting taped product, please put the letter "B" or "i" between the "()". Lead wire pitch B=5 mm, 7.5 mm, i=2.5 mm. The taping dimensions are explained on p.178 of our Catalog. Please use it as a reference guide.

■ Standard Products (Bi-polar)

W.V. (V)	Cap. (±20 %) (μF)	Case size		Specification		Lead Length			Part No.	Min. Packaging Q'ty	
		Dia. (mm)	Length (mm)	Ripple Current (120 Hz) (+85 °C)	tan δ (120 Hz) (+20 °C)	Lead Dia. (mm)	Lead Space			Straight Leads (pcs)	Taping (pcs)
				(mA r.m.s.)	(Ω)		Straight (mm)	Taping *B (mm)	Taping *i (mm)		
50	0.47	5	11	10	0.15	0.5	2.0	5.0	2.5	ECEA1HNR47U()	200 2000
	1	5	11	10	0.15	0.5	2.0	5.0	2.5	ECEA1HN010U()	200 2000
	2.2	5	11	18	0.15	0.5	2.0	5.0	2.5	ECEA1HN2R2U()	200 2000
	3.3	5	11	25	0.15	0.5	2.0	5.0	2.5	ECEA1HN3R3U()	200 2000
	4.7	5	11	30	0.15	0.5	2.0	5.0	2.5	ECEA1HN4R7U()	200 2000
	10	6.3	11.2	50	0.15	0.5	2.5	5.0	2.5	ECEA1HN100U()	200 2000
	22	8	11.5	90	0.15	0.6	3.5	5.0		ECEA1HN220U()	200 1000
	33	8	11.5	110	0.15	0.6	3.5	5.0		ECEA1HN330U()	200 1000
	47	10	12.5	140	0.15	0.6	5.0	5.0		ECEA1HN470U()	200 500
	100	10	20	250	0.15	0.6	5.0	5.0		ECEA1HN101U()	200 500
	220	12.5	25	360	0.15	0.6	5.0	5.0		ECEA1HN221U()	200 500
	330	16	25	450	0.15	0.8	7.5	7.5		ECEA1HN331U()	100 250
	470	16	31.5	590	0.15	0.8	7.5			ECEA1HN471U	100

Endurance: 85 °C 2000 h (1000 hours for each polarity)

When requesting taped product, please put the letter "B" or "i" between the "()". Lead wire pitch B=5 mm, 7.5 mm, i=2.5 mm.
The taping dimensions are explained on p.178 of our Catalog. Please use it as a reference guide.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:

Click to view products by Panasonic manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#) [515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#) [EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)