



► **AIRTOOLS**

# **SILENT YET POWERFUL, POWERFUL YET LIGHTWEIGHT, LIGHTWEIGHT YET DURABLE**

Generations of proud professionals have developed their skills together with Bahco tools since 1886 and already in the middle of last century Bahco has been synonymous with high quality air tools.

We are proud to present a strong comeback in the air tools business with a range of unique products. A range that incorporates Bahco's spirit of innovation and unrelenting quality. A range of silent yet powerful, powerful yet lightweight, lightweight yet durable tools, designed for high demands, from the toughest job to the most accurate precision job, from the smallest car to the largest truck.

In other words a complete range of professional air tools for everyday use!



## **BAHCO - THE CHOICE OF TRUE PROFESSIONALS**

### ▶ AIR TOOL ICONS

PRODUCT CODE	PACKAGING DIMENSIONS	DRIVE	MAXIMUM TORQUE IN REVERSE MODE	TORQUE RANGE	SPEED - REVOLUTIONS PER MINUTE / STROKES PER MINUTE	SOUND PRESSURE	AIR CONSUMPTION	ENGINE OUTPUT
AIR INLET	HOSE DIAMETER / RECOMMENDED MIN. HOSE DIAMETER	TOOL WEIGHT	CHUCK / COLLET SIZE	DISC/BELT DIAMETER	EXCENTRIC	VIBRATION LEVEL	LENGTH	PACKAGED QTY

# A FAMILY WITH ATTITUDE!

## EXTREME POWER!

The 8 VANES TWIN HAMMER mechanism delivers maximum power at minimum air consumption in no time



## SMART DESIGN

Flat rubber covered top ensures a stable grip. Supplied with a black vinyl protection boot

## CLUMSY?

No worries! The well balanced ONE PIECE MAGNESIUM HOUSING ensures extreme durability



## MAINTENANCE FREE!

We know you DON'T have time to lubricate your gun. Now you DON'T have to feel guilty about it because you DON'T NEED TO DO IT!

The exceptional OIL BATH lubrication system with high grade synthetic racing oil ensures a MAINTENANCE FREE TOOL and LONG LIFETIME

## CONFUSED?

### FORWARD? REVERSE?

### MAX? MIN?

Change DIRECTION and POWER output in 1 SECOND with ONE HAND! No need to WASTE TIME by USING TWO HANDS any more



## EXTRA SILENT & POWERFUL or EXTRA POWERFUL & SILENT?

The system with optional mufflers gives YOU the CHOICE to quickly adapt the tool to YOUR DEMANDS and needs! Use 0, 1 or 2 of the included mufflers! With no muffler the power is maximized, with 2 mufflers the sound is minimized

[mag-NEE-zee-əm]

## IMPACT WRENCH 1/2"



### THE CHOICE IS YOURS!

Muffler	MAX Nm	% Nm	dBa	%
0	1098 Nm		102.5 dBA	
1	1015 Nm	-7,6%	92.5 dBA	-316 %
2	935 Nm	-14,8%	86.6 dBA	-623 %

BPM915 100x250x250 1/2 1098 -813 5.700 ≤102,5 6,6 178 1/2 10 2,02

[mag-NEE-zee-əm]

## MINI IMPACT WRENCH 1/2"



### THE CHOICE IS YOURS!

Muffler	MAX Nm	% Nm	dBa	%
0	440 Nm		99.1 dBA	
1	414 Nm	-6%	90.3 dBA	-275 %

BPM914 100x250x200 1/2 440 -300 10.700 ≤99,1 4,54 68 1/2 10 1,03

[mag-NEE-zee-əm]

## IMPACT WRENCH 3/8"



### THE CHOICE IS YOURS!

Muffler	MAX Nm	% Nm	dBa	%
0	440 Nm		99.1 dBA	
1	414 Nm	-6%	90.3 dBA	-275 %

BPM916 100x250x200 3/8 440 -300 10.700 ≤99,1 4,54 68 3/8 10 1,03

All technical specifications are stated at the recommended working pressure of 6.2 bar

▶ IMPACT WRENCH 1/2"



- Composite housing
- Twin hammer mechanism
- Air exhaust in handle
- Swivel connection

BP815	78x215x210	1/2	825	320-620	7.000	84	5,00	130	1/4	10	1,95

▶ 1/2" IMPACT WRENCH SET



- Includes:
- One BP815
  - Eleven impact sockets
  - One 1/4" threaded male coupler
  - Supplied in robust plastic case with foam inlay (compatible with Bahco tool trolley modular system, T12)

BP815K1	108x371x321	10-24	3,2

▶ IMPACT WRENCH 3/4"



- Composite housing
- Twin hammer mechanism
- Air exhaust in handle

BP817	100x290x250	3/4	1.800	340x950	4.500	88	4,30	190	3/8	10	3,95

**FOR THE LARGE ONES!**



**BP900L impressive 2.800 Nm!**



All technical specifications are stated at the recommended working pressure of 6.2 bar

# THE LONG & STRONG!

## EASY TO HANDLE!

Balanced lightweight house for superior control and comfortable usage

## COMFORTABLE TO HANDLE!

Soft grip handle with increased comfort, reduced vibration, and increased insulation against cold

## HEAVY WORK LOAD?

No worries! The "stop lock" pins prevent ratchet pawl lock up and assures increased tool life

## EXTRA SILENT & POWERFUL or EXTRA POWERFUL & SILENT?

The muffler bypass system gives YOU the choice to quickly adapt the tool to YOUR DEMANDS and needs!

BP921	70x330x90	308	1/2	7-95	7-67	260	200	≤94,9	≤5,2	127	1/2	10	1,4
-------	-----------	-----	-----	------	------	-----	-----	-------	------	-----	-----	----	-----

MUFFLER BYPASS SYSTEM				
Muffler	MAX Nm	% Nm	dBA	%
	95 Nm		94.9 dBA	
	67 Nm	-30%	87.9 dBA	-224%

## ▶ MINI RATCHET 1/4"



- Soft grip handle
- Hard coated motor plates
- Large lightweight selector knob
- All ball bearing construction and high strength alloy steel gear system
- Supplied with a black protection boot

BP919	50x280x100	180	1/4	47	0-47	235	85	2,5	40	1/4	10	0,6
-------	------------	-----	-----	----	------	-----	----	-----	----	-----	----	-----

## ▶ MINI RATCHET 3/8"



- Balanced lightweight housing
- Soft grip handle
- Hard coated motor plates
- Large lightweight selector knob
- All ball bearing construction and high strength alloy steel gear system
- Supplied with a black protection boot

BP920	50x280x100	180	3/8	47	0-47	235	85	2,5	40	3/8	10	0,6
-------	------------	-----	-----	----	------	-----	----	-----	----	-----	----	-----

# WHEN ACCESSIBILITY & POWER IS CRUCIAL



The long & strong! 308 mm long, 95 Nm strong!


## ▶ BELT SANDER 10 mm



Belts 25 pcs 80 grits - Suitable for BP212




BPN21201



- Adjustable arm
- Including three belts 80, 100 and 120 grits

BP212	65x280x85	10x330	246	16.000	83	<2,50	390	1/4	10	0,80


## ▶ BELT SANDER 20 mm

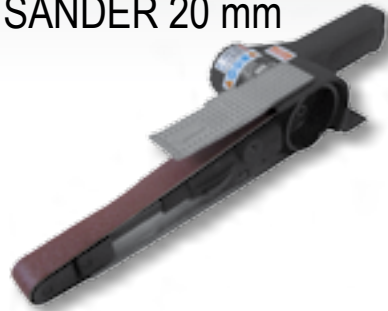

Belts 25 pcs 100 grits - Suitable for BP222



BPN22201



- Adjustable arm
- Including two belts 100 and 120 grits

BP222	65x280x85	20x520	328	16.000	85,5	3,20	390	1/4	10	1,10

## ▶ ORBITAL SANDER 5 mm



- For central vacuum systems
- Composite housing

BP601	105x210x145	5	11.000	224	152	80	<2,50	255	1/4	0,90

## ▶ ORBITAL SANDER 2,5 mm



- For central vacuum systems
- Composite housing

BP610	105x210x145	2,5	11.000	224	152	80	<2,50	255	1/4	0,80

Pad - Suitable for BP601 and BP610

BP51137



## ▶ PISTOL GRIP SANDER



- Top mounted forward / reverse switch

BP204	120x570x238	168	3	25.000	85	4,53	170	0,503

Accessories suitable for BP204



Description

BP2044PAD	3" Velcro pad			
BP20425180	25 pcs, 180 grit			
BP20425220	25 pcs, 220 grit			
BP20410320	25 pcs, 320 grit			
BP20410800	25 pcs, 800 grit			

## ▶ PISTOL GRIP SANDER SET



Including:

- BP204
- 1 x 3" Velcro pad
- 10 x 180 grits, 3" pads
- 10 x 220 grits, 3" pads
- 10 x 320 grits, 3" pads
- 10 x 800 grits, 3" pads

BP204K

108x371x321

# WHEN REAL POWER IS A MUST!



With its speed of 10.000 revolutions per minute the BP823 gets the job done in no time

## ▶ LOW REVOLUTION GRINDER



- Speed control system
- Hexagonal rubber sleeve
- Safety trigger

Exhaust hose for die grinder



BP117EH



BP117	50x243x172	373	2.500	85	4,53	170	1/4	10	1

## ▶ AIR RIVETER



- Rivet capacity;  
3,2 mm  
4,0 mm  
4,8 mm  
6,4 mm

		Stroke (mm)	Traction power (kg)			
BP125	349x543x397	19	1330	1/4	10	2,0

## ▶ DISC GRINDER



- Composite housing
- Safety trigger

BP823	108x285x147	125	559	10.000	83	<2,50	340	1/4	10	1,80

## ▶ CUT OFF TOOL



- Speed control system
- Rubber sleeve
- Safety trigger
- Swivel connection

BP110	81x190x86	75	373	18.000	98	<2,50	113	1/4	10	0,90

All technical specifications are stated at the recommended working pressure of 6.2 bar

# THE SLUGGER! AIR HAMMER SET

## THE FASTEST

The unique quick chuck makes chisel change a piece of cake



## HARD HITTING!

The 76 MM LONG STROKE of the EXTRA HEAVY HARD STEEL PISTON ensures striking power as you have never experienced before

## DURABLE & SMART

Built of only the most heavy duty materials, solid HIGH GRADE STEEL BARREL, KEVLAR reinforced flutter disc, INBUILT AIR FILTER. All to ensure MAXIMUM TOOL LIFE



## SO SMOOTH...

Even if the power is tremendous, the vibration is nominal. ONLY 1.5m/s<sup>2</sup> thanks to the dual elastomer cushions that absorb almost all vibration

## COMPLETE

Supplied in robust plastic case including FIVE CHISELS for a wide area of applications

## EASY HANDLING

Built in four position air regulator and direct multi-port frontal exhaust ensures comfortable usage

BP909K	108x371x321	10	229	2.500	94	1,5	60	1/4	10
									2,1

### Accessory chisels - Suitable for BP909K

	Type	Shank	Included in BP909K	
BP909TF	Turning, flat	Round 10.2mm	Yes	
BP909TWF	Turning, wide flat	Round 10.2mm	Yes	
BP909TTP	Turning, tapered punch	Round 10.2mm	Yes	
BP909TE	Turning, edge claw	Round 10.2mm	Yes	
BP909TH	Turning, hammer	Round 10.2mm	Yes	
BP909TSP	Turning, straight punch	Round 10.2mm	Yes	
BP909NF	Non - turning, flat	Round 10.2mm	Yes	
BP909NE	Non - turning edge claw	Round 10.2mm	Yes	

## ▶ PAINT GUN SET

- High volume at low pressure
- High precision provides high quality painting
- Spare nozzle sets covering five diameters
- No seal component design for much longer operation life
- Precise air cap keeps the outlet less than 10PSI
- One piece aluminum housing



BPHVLP01	155x225x200	2-2.8	600	410	1/4	5-40	1,00

### Accessories available loose and included with the BPHVLP01

	Description	
BPHVLP0110	Nozzle set 1.0 mm	
BPHVLP0112	Nozzle set 1.2 mm	
BPHVLP0114	Nozzle set 1.4 mm	
BPHVLP0117	Nozzle set 1.7 mm	
BPHVLP0120	Nozzle set 2.0 mm	

## ▶ BLOW GUN

- Steel nozzle
- Meets O.S.H.A requirements
- Brass inlet



BP218	19x200x85	≤ 11	410	1/4	0,135

All technical specifications are stated at the recommended working pressure of 6.2 bar



## ▶ PNEUMATIC MARKER



- For fast and secure marking
- Low vibration
- Low air consumption

BP799	17x200x17	13.000	78	<2,00	28	1/4	10	0,22

Spare tip - Suitable for BP799



BP79912



## ▶ AIR FILTER - REGULATOR



- Filters the air to avoid damage caused by dust
- Regulates desired pressure between 1 and 8,5 bar

		Adjustable pressure range (bar)	Maximum service pressure (MPa)	°C		Bowl capacity (ml)		
BP254	80x290x80	1-8,5	1,5	-5/+60	≤ 3.800	200	1/2	0,805

## ▶ AIR FILTER - REGULATOR - LUBRICATOR



- Filters the air to avoid damages caused by dust
- Regulates desired pressure between 1 and 8,5 bar
- Automatically lubricates the air to ensure correct operation and longer lifetime of the air tools

		Adjustable pressure range (bar)	Maximum service pressure (MPa)	°C		Bowl capacity (ml)		
BP255	115x235x115	1-8,5	1,5	-5/+60	≤ 3.800	200	1/2	1,350

## ▶ STEEL AIR HOSE REEL



- Corrosion resistant
- Adjustable double guide arm
- Ball bearing swivel
- Strengthened frame
- 110° swivel base
- Positive latching system which automatically locks the hose at desired length for increased functionality and comfort

BPHRS1315	519x614x264	13/20	15	1/2-1/2	24

## ▶ AIR HOSE REELS



- 180° swivel bracket
- Detachable pin swivel
- Durable corrosion and rough environment resistant polypropylene housing
- Positive latching system which automatically locks the hose at desired length for increased functionality and comfort

BPHR1315	509x539x239	13/16	15	1/2-1/2	9,70
BPHR1020	509x539x239	10/14,5	20	3/8-3/8	9,70

## ▶ IN LINE MINI LUBRICATOR



- Lubricates the air to ensure correct operation and longer lifetime of the air tools

BPN251	33x60x33	1/4	0,008

All technical specifications are stated at the recommended working pressure of 6.2 bar

1/2" Impact socket set metric



	K7801VM/S4		17-24
--	------------	--	-------

1/2" Impact socket sets imperial, 10 pcs



	K7801Z/10		7/16-1
--	-----------	--	--------

1/2" Impact sockets metric deep



	K7806M-10		10
	K7806M-11		11
	K7806M-12		12
	K7806M-13		13
	K7806M-14		14
	K7806M-16		16
	K7806M-17		17
	K7806M-18		18
	K7806M-19		19
	K7806M-21		21
	K7806M-22		22
	K7806M-23		23
	K7806M-24		24
	K7806M-27		27
	K7806M-30		30

1/2" Impact socket sets imperial, 10 pcs



	K7806Z/10		7/16-1
--	-----------	--	--------

1/2" Impact socket set metric deep



	K7806M/S4		17-24
--	-----------	--	-------

1/2" Impact socket sets metric

	D/S10		280x160x70		10-19
	D/S14		280x160x70		10-27



1/2" Impact sockets imperial



	K7801Z-3/8		3/8
	K7801Z-7/16		7/16
	K7801Z-1/2		1/2
	K7801Z-9/16		9/16
	K7801Z-5/8		5/8
	K7801Z-11/16		11/16
	K7801Z-3/4		3/4
	K7801Z-13/16		13/16
	K7801Z-7/8		7/8
	K7801Z-15/16		15/16
	K7801Z-1		1
	K7801Z-1.1/16		1.1/16
	K7801Z-1.1/8		1.1/8
	K7801Z-1.1/4		1.1/4

1/2" Impact socket sets metric deep

	DD/S10		280x160x70		10-19
	DD/S14		375x215x100		10-27



1/2" Impact sockets imperial deep



	K7806Z-3/8		3/8
	K7806Z-7/16		7/16
	K7806Z-1/2		1/2
	K7801Z-9/16		9/16
	K7801Z-5/8		5/8
	K7801Z-11/16		11/16
	K7801Z-3/4		3/4
	K7801Z-13/16		13/16
	K7801Z-7/8		7/8
	K7801Z-15/16		15/16
	K7801Z-1		1
	K7801Z-1.1/16		1.1/16
	K7801Z-1.1/8		1.1/8
	K7801Z-1.1/4		1.1/4
	K7801Z-1.5/16		1.5/16
	K7801Z-1.3/8		1.3/8
	K7801Z-1.7/16		1.7/16
	K7801Z-1.1/2		1.1/2

1/2" Impact socket set + metric deep

	D-DD/S20		375x215x100		10-19
--	----------	--	-------------	--	-------



1/2" Impact sockets TORX®



	K7801TORX-E10		E10
	K7801TORX-E12		E12
	K7801TORX-E14		E14
	K7801TORX-E16		E16
	K7801TORX-E18		E18
	K7801TORX-E20		E20
	K7801TORX-E24		E24

# IMPACT SOCKETS AND ACCESSORIES 1"

## 1" Impact sockets metric



Part Number	Size
K9501M-22	22
K9501M-24	24
K9501M-27	27
K9501M-30	30
K9501M-32	32
K9501M-33	33
K9501M-34	34
K9501M-36	36
K9501M-38	38
K9501M-41	41
K9501M-42	42
K9501M-46	46
K9501M-50	50
K9501M-55	55
K9501M-60	60
K9501M-65	65
K9501M-70	70
K9501M-75	75
K9501M-80	80

## 1" Impact sockets imperial



Part Number	Size
K9501Z-1	1
K9501Z-1.1/16	1.1/16
K9501Z-1.1/8	1.1/8
K9501Z-1.3/16	1.3/16
K9501Z-1.1/4	1.1/4
K9501Z-1.5/16	1.5/16
K9501Z-1.3/8	1.3/8
K9501Z-1.7/16	1.7/16
K9501Z-1.1/2	1.1/2
K9501Z-1.9/16	1.9/16
K9501Z-1.5/8	1.5/8
K9501Z-1.11/16	1.11/16
K9501Z-1.3/4	1.3/4
K9501Z-1.13/16	1.13/16
K9501Z-1.7/8	1.7/8
K9501Z-1.15/16	1.15/16
K9501Z-2	2
K9501Z-2.1/8	2.1/8
K9501Z-2.3/16	2.3/16
K9501Z-2.1/4	2.1/4
K9501Z-2.5/16	2.5/16
K9501Z-2.9/16	2.9/16
K9501Z-2.3/4	2.3/4

## 1" Impact sockets metric deep



Part Number	Size
K9506M-22	22
K9506M-24	24
K9506M-27	27
K9506M-30	30
K9506M-32	32
K9506M-33	33
K9506M-34	34
K9506M-36	36
K9506M-38	38
K9506M-41	41
K9506M-46	46
K9506M-50	50
K9506M-55	55
K9506M-60	60

## 1" Impact sockets imperial deep



Part Number	Size
K9506Z-1	1
K9506Z-1.1/16	1.1/16
K9506Z-1.3/16	1.3/16
K9506Z-1.1/4	1.1/4
K9506Z-1.7/16	1.7/16
K9506Z-1.1/2	1.1/2
K9506Z-1.5/8	1.5/8
K9506Z-1.13/16	1.13/16
K9506Z-1.7/8	1.7/8

## 1" Impact extensions



Part Number	Length (mm)	Input	Output
K9560G-1	125	1	1
K9560G-2	175	1	1
K9560G-3	325	1	1

## 1" Impact ball joint



Part Number	Input	Output
K9567S	1	1

## 1" Impact adaptor



Part Number	Input	Output
K8964G	3/4	1

## 1" Impact adaptor, bit holder



Part Number	Input	Output
K9509H5	22 mm	1

## 1" Screwdriver bits for hexagon metric socket head screws



Part Number	Size
K8909ML-12	12
K8909ML-14	14
K8909ML-17	17
K9509ML-19	19
K9509ML-22	22
K9509ML-24	24

## 1" Clamping springs



Part Number	Input	Output
K560F-7	1	19-70
K560F-8	1 & 1.1/2	75-80 & 46-90

## Impact sockets Scania



Part Number	Description	Output
BHVIS0895	SCANIA F WHEEL-8F X 95MM-3/4	3/4
BHVIS08100	SCANIA R WHEEL-8F X 100MM-3/4	3/4

- Special impact sockets to use for Scania truck wheels
- Output:
- HVIS0895: 8 flutes x 95 mm for front wheels
- HVIS08100: 8 flutes x 100 mm for rear wheels

## Impact socket Volvo



Part Number	Description	Output
BHVIS08115	VOLVO WHEEL-8F X 115MM-3/4	3/4

- Special impact sockets to use for Volvo truck wheels
- Output: 8 flutes x 115 mm



AUT-0816-INT

SNA Europe



[www.bahco.com](http://www.bahco.com)

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [bahco manufacturer](#):*

Other Similar products are found below :

[65I/7-1](#) [B219.005](#) [BE-7855](#) [BE-9675](#) [BE-9882I](#) [BE-9882S](#) [1RM-11](#) [KSR753-1P](#) [1931M/10T](#) [2101S-180](#) [3834-SET-95](#) [111M/11T](#)  
[65I/T20-2P](#) [LINDSTROM SUPREME MODULE](#) [9073P](#) [1952M/17T](#) [1936M-16-17](#) [222D](#) [6M/S8](#) [6962L](#) [111M-15](#) [8074 IP](#) [8075 IP](#) [L7892](#)  
[28M-10](#) [2928-200](#) [3906-300-24-100](#) [21HDG-200](#) [2223 D-150](#) [3417 NF](#) [3417NFB](#) [3417 NF VDE](#) [3419 B](#) [3736S/6](#) [3875-LY5](#) [3875-LY7](#)  
[4532-AL](#) [4532-B](#) [4532-BL](#) [4532-C](#) [480-20](#) [BE-8870](#) [CR W 03](#) [NS006-1011](#) [NS006-1213](#) [NS006-1214](#) [NS006-1617](#) [NS006-1819](#) [NS006-1920](#) [TAH2628G-160](#)