


Thyristor Module

PSET 132/08-18

I_{TAVM} = 132 A
 V_{RRM} = 600-1800V

Preliminary Data Sheet

V_{RSM} V_{DSM} (V)	V_{RRM} V_{DRM} (V)	Type
900	800	PSET 132/08
1300	1200	PSET 132/12
1500	1400	PSET 132/14
1700	1600	PSET 132/16
1900	1800	PSET 132/18

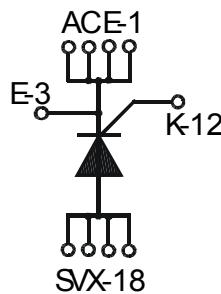

Symbol	Test Conditions	Maximum Ratings		
I_{TAVM}	$T_C = 85^\circ C$, 180° sine	132	A	
I_{TSM}	$T_{VJ} = 45^\circ C$ $t = 10 \text{ ms}$ (50 Hz), sine	3600	A	
	$V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	3850	A	
	$T_{VJ} = 125^\circ C$ $t = 10 \text{ ms}$ (50 Hz), sine	3200	A	
	$V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	3420	A	
$\int i^2 dt$	$T_{VJ} = 45^\circ C$ $t = 10 \text{ ms}$ (50 Hz), sine	64800	$A^2\text{s}$	
	$V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	62300	$A^2\text{s}$	
	$T_{VJ} = 125^\circ C$ $t = 10 \text{ ms}$ (50 Hz), sine	51200	$A^2\text{s}$	
	$V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	49100	$A^2\text{s}$	
$(di/dt)_{cr}$	$T_{VJ} = 125^\circ C$ repetitive, $I_T = 250 \text{ A}$ $f=50\text{Hz}, t_p=200\mu\text{s}$	150	$A/\mu\text{s}$	
	$V_D=2/3V_{DRM}$			
	$I_G=0.5 \text{ A}$ non repetitive, $I_T = I_{TAVM}$	500	$A/\mu\text{s}$	
	$di_G/dt=0.5A/\mu\text{s}$			
$(dv/dt)_{cr}$	$T_{VJ} = 125^\circ C$ $V_D=2/3V_{DRM}$ $R_{GR} = \infty$, method 1 (linear voltage rise)	1000	$V/\mu\text{s}$	
P_{GM}	$T_{VJ} = 125^\circ C$ $t_p = 30\mu\text{s}$ $I_T = I_{TAVM}$ $t_p = 300\mu\text{s}$	≤ 10	W	
		≤ 5	W	
P_{GAVM}		0.5	W	
V_{RGM}		10	V	
T_{VJ}		-40... + 130	$^\circ C$	
T_{VJM}	for 10 sec	150	$^\circ C$	
T_{stg}		-40... + 125	$^\circ C$	
V_{ISOL}	50/60 Hz, RMS $t = 1 \text{ min}$	3000	V~	
	$I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	3600	V~	
M_d	Mounting torque	(M4)	1.5 - 2.0 14 - 18	Nm lb.in.
Weight	typ.	24	g	

Features

- Isolation voltage 3600 V~
- Planar glass passivated chips
- Low forward voltage drop
- Leads suitable for PC board soldering
- UL registered, E 148688

Applications

- DC motor control
- Light and temperature control
- Softstart AC motor controller
- Solid state switches

Advantages


- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability
- High power density
- Small and light weight

Data according to IEC 60747 refer to a single thyristor unless otherwise stated.

Symbol	Test Conditions		Characteristic Value		
$I_{D,R}$	$T_{VJ} = 125^\circ C$, $V_R = V_{RRM}$, $V_D = V_{DRM}$		\leq	10	mA
V_T	$I_T = 200 \text{ A}$, $T_{VJ} = 25^\circ C$		\leq	1.3	V
V_{TO}	For power-loss calculations only			0.8	V
r_T				1.65	$\text{m}\Omega$
V_{GT}	$V_D = 6\text{V}$	$T_{VJ} = 25^\circ C$	\leq	1.5	V
		$T_{VJ} = -40^\circ C$	\leq	1.6	V
I_{GT}	$V_D = 6\text{V}$	$T_{VJ} = 25^\circ C$	\leq	300	mA
		$T_{VJ} = -40^\circ C$	\leq	400	mA
V_{GD}	$T_{VJ} = 125^\circ C$	$V_D = 2/3V_{DRM}$	\leq	0.2	V
I_{GD}	$T_{VJ} = 125^\circ C$	$V_D = 2/3V_{DRM}$	\leq	10	mA
I_L	$T_{VJ} = 25^\circ C$, $t_p = 10\mu s$		\leq	450	mA
	$I_G = 0.5\text{A}$, $dI_G/dt = 0.5\text{A}/\mu s$				
I_H	$T_{VJ} = 25^\circ C$, $V_D = 6\text{V}$, $R_{GK} = \infty$		\leq	200	mA
t_{gd}	$T_{VJ} = 25^\circ C$, $V_D = 1/2V_{DRM}$		\leq	2	μs
	$I_G = 0.5\text{A}$, $dI_G/dt = 0.5\text{A}/\mu s$				
R_{thJC}	per thyristor; DC, max.			0.25	K/W
	per module, max.			0.125	K/W
R_{thJK}	per thyristor; sine 180° el, typ.			0.35	K/W
	per module, typ.			0.175	K/W
d_s	Creeping distance on surface			11.2	mm
d_A	Creeping distance in air			5.0	mm
a	Max. allowable acceleration			50	m/s^2

Package style and outline

Dimensions in mm (1mm = 0.0394")

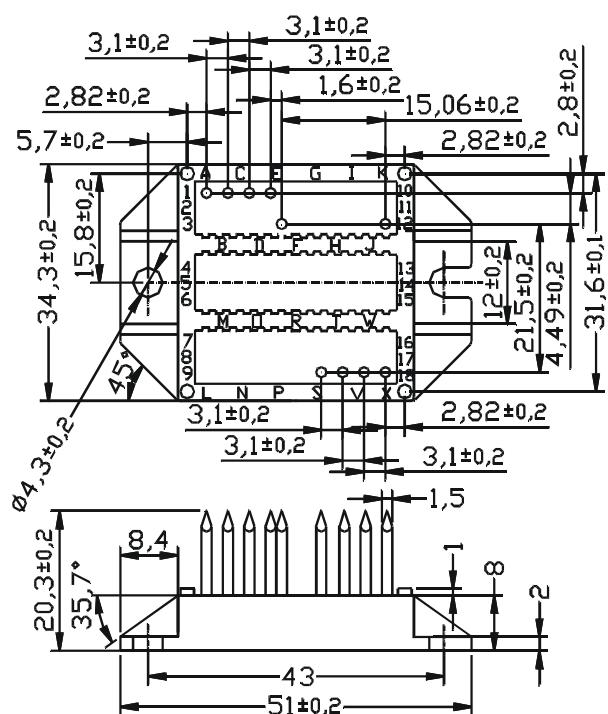

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for SCR Modules category:

Click to view products by Powersem manufacturer:

Other Similar products are found below :

[DT430N22KOF](#) [T1401N42TOH](#) [T1851N60TOH](#) [T390N14TOF](#) [T420N12TOF](#) [T470N16TOF](#) [T640N16TOF](#) [T901N36TOF](#) [TD140N18KOF](#)
[TD142N16KOF](#) [TD162N16KOF-A](#) [TD250N12KOF](#) [TD330N16AOF](#) [TT215N22KOF](#) [TZ310N20KOF](#) [TZ425N12KOF](#) [TZ500N12KOF](#)
[T300N14TOF](#) [T3710N06TOF VT](#) [T390N16TOF](#) [T460N24TOF](#) [T501N70TOH](#) [T560N16TOF](#) [T640N14TOF](#) [TD250N14KOF](#)
[TT600N16KOF](#) [TZ500N16KOF](#) [TZ240N36KOF](#) [TT210N12KOF](#) [NTE5710](#) [TD180N16KOF](#) [TT240N28KOF](#) [TZ425N14KOF](#)
[T1081N60TOH](#) [TT61N08KOF](#) [TD251N18KOF](#) [TT162N08KOF](#) [TZ430N22KOF](#) [TT180N12KOF](#) [T2001N34TOF](#) [TD140N22KOF](#)
[MDMA200P1600SA](#) [TT180N16KOF](#) [VS-ST333C08LFM0](#) [VS-ST180C14C0L](#) [T1080N02TOF](#) [TD320N16SOF](#) [T360N22TOF](#)
[TZ810N22KOF](#) [T2563NH80TOH](#)