


## Reed Switch - Miniature - Normally Open Contacts

Part Number : GC2722

### Product Data Sheet

PICTURE	DIMENSIONS
---------	------------

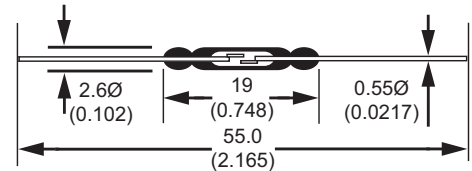

 File Number E103299

 RoHS Compliant

Drawings not to scale  
All dimensions in mm (inches) nominal.

SPECIFICATION		
---------------	--	--

Contact Form		Normally Open
Contact Material		Rhodium
Switching Capacity	Max.	12 VA
Switching Voltage	Max.	230 VAC/DC
Switching Current	Max.	1.0 A
Carrying Current	Max.	2.0 A
Dielectric Strength	Min.	400 VDC
Contact Resistance	Max.	100 mOhms
Insulation Resistance	Min.	10 <sup>11</sup>
Pull - In - Sensitivity		30 - 50 AT
Drop - Out - Sensitivity	Min.	5
Bounce Time	Max.	0.5 ms
Release Time	Max.	0.10 ms
Resonant Frequency	Typ.	2900 Hz
Operating Frequency	Max.	200 Hz
Vibration (10-1000Hz)		35 g
Shock (11 ms)		50
Capacitance	Typ.	0.5 pF
Operating Temperature Range		-40°C + 125°C
Test Coil	Type	1700

NOTE
------

- When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm (.118in.) to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.
- We offer a crop and form service for Reed Switches to be customized to your specification.

Ordering Information
----------------------

**PART NUMBER**    2722    30    50

- Type \_\_\_\_\_
- Minimum (AT) Sensitivity \_\_\_\_\_
- Maximum (AT) Sensitivity \_\_\_\_\_

**Example:**

Type 2722 Standard Sensitivity. Pull-in sensitivity between 30-50 AT is PART NO: 2722 30 50  
Available in ranges of 5 AT e.g: 30-35, 35-40 etc.

Did you know we also sell?
----------------------------



Rev. No.	Revision Note	Date	Signature
2	Datasheet Redesign	26-05-06	NG



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Magnetic/Reed Switches](#) category:*

*Click to view products by [Comus](#) manufacturer:*

Other Similar products are found below :

[59200-020](#) [MDSR-4-12-23](#) [MMRB20006](#) [PSW-21](#) [AMS-17-B](#) [AMS-20MG](#) [AMS-37-G\\_W/Brk](#) [AMS-38S-I](#) [AMS-38SW](#) [AMS-39B-B](#)  
[AMS-39B-W](#) [HRB10030](#) [2116900170](#) [AMS-10S-B](#) [AMS-25B-B](#) [AMS-37BROWN](#) [AMS-37GRAY](#) [AMS-38MG](#) [AMS-38SB](#) [AMS-9-B](#)  
[AMS-T10C\(B\)](#) [4350238](#) [505-171W WHITE](#) [505-211B](#) [505-391G](#) [505-5114W WHITE](#) [505-70B](#) [507-382B](#) [BMC-33B](#) [HM00-01800](#)  
[4350186](#) [4360013](#) [505-101-GC](#) [505-101-GS](#) [505-101WC](#) [505-101-WS](#) [505-172W](#) [505-201W](#) [505-392W](#) [505-90G](#) [505-90I](#) [507-381BB](#)  
[RSW-21A-I](#) [ODC-56B](#) [FF6-21-DC-03-SS](#) [FF6-11-AC-06](#) [FF6-21-AC-06](#) [DRR-129\(42-48\)](#) [ODC-56A](#) [AMS-10MGW](#)