

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor and is officers, employees, uniotificated use, even if such claim any manner.

September 1983 Revised May 2005

MM74HC273 Octal D-Type Flip-Flops with Clear

General Description

FAIRCHILD

SEMICONDUCTOR

The MM74HC273 edge triggered flip-flops utilize advanced silicon-gate CMOS technology to implement D-type flipflops. They possess high noise immunity, low power, and speeds comparable to low power Schottky TTL circuits. This device contains 8 master-slave flip-flops with a common clock and common clear. Data on the D input having the specified setup and hold times is transferred to the Q output on the LOW-to-HIGH transition of the CLOCK input. The CLEAR input when LOW, sets all outputs to a low state.

Each output can drive 10 low power Schottky TTL equivalent loads. The MM74HC273 is functionally as well as pin compatible to the 74LS273. All inputs are protected from damage due to static discharge by diodes to V_{CC} and ground.


Features

- Typical propagation delay: 18 ns
- Wide operating voltage range
- Low input current: 1 μA maximum
- Low quiescent current: 80 μA (74 Series)
- Output drive: 10 LS-TTL loads

Ordering Code:


Order Number	Package Number	Package Description
MM74HC273WM	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide
MM74HC273SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
MM74HC273MTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide
MM74HC273N	N20A	20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

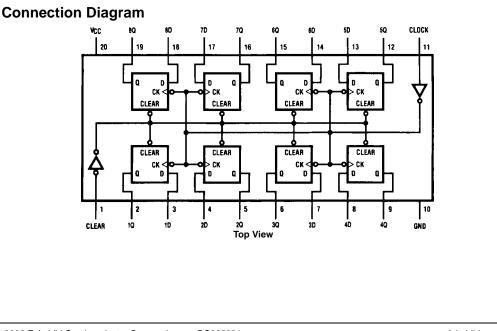

© 2005 Fairchild Semiconductor Corporation DS005331



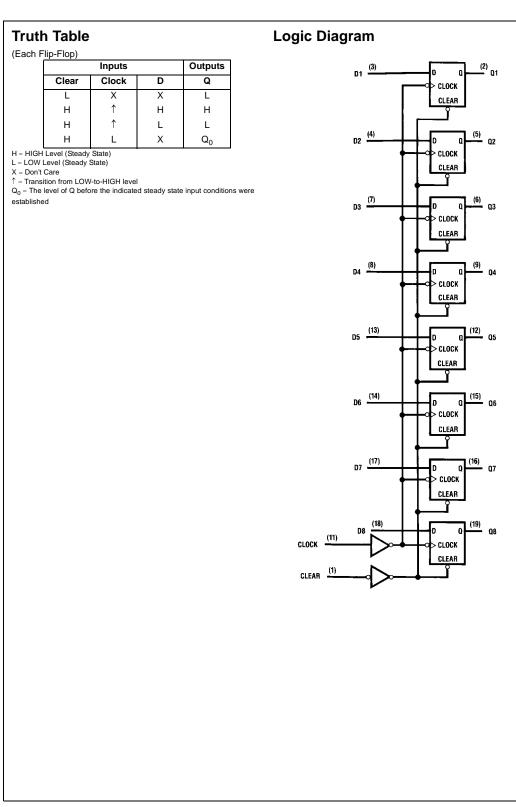

Absolute Maximum Ratings(Note 1)

Recommended Operating Conditions

(Note 2)	-
Supply Voltage (V _{CC})	-0.5 to +7.0V
DC Input Voltage (V _{IN})	–1.5 to V _{CC} +1.5V
DC Output Voltage (V _{OUT})	–0.5 to V _{CC} +0.5V
Clamp Diode Current (I _{IK} , I _{OK})	±20 mA
DC Output Current, per pin (I _{OUT})	±25 mA
DC V_{CC} or GND Current, per pin (I _{CC})	±50 mA
Storage Temperature Range (T _{STG})	–65°C to +150°C
Power Dissipation (P _D)	
(Note 3)	600 mW
S.O. Package only	500 mW
Lead Temperature (TL)	
(Soldering 10 seconds)	260°C

	Min	Max	Units
Supply Voltage (V _{CC})	2	6	V
DC Input or Output Voltage			
(V _{IN} , V _{OUT})	0	V _{CC}	V
Operating Temperature Range (T _A)	-40	+85	°C
Input Rise or Fall Times			
$(t_r, t_f) V_{CC} = 2.0V$		1000	ns
$V_{CC} = 4.5V$		500	ns
$V_{CC} = 6.0V$		400	ns
Note 1: Absolute Maximum Ratings are those age to the device may occur.	values t	beyond whi	ch dam-

MM74HC273

Note 2: Unless otherwise specified all voltages are referenced to ground.

Note 3: Power Dissipation temperature derating — plastic "N" package: – 12 mW/°C from 65°C to 85°C.


DC Electrical Characteristics (Note 4)


Paramotor	Conditions	Vee	TA =	$T_A = 25^{\circ}C$ $T_A = -40$ to $85^{\circ}C$ $T_A = -55$ to $125^{\circ}C$	Units		
Farameter	conditions	VCC	Тур		Guaranteed L	Units	
Minimum HIGH Level		2.0V		1.5	1.5	1.5	V
Input Voltage		4.5V		3.15	3.15	3.15	V
		6.0V		4.2	4.2	4.2	V
Maximum LOW Level		2.0V		0.5	0.5	0.5	V
Input Voltage		4.5V		1.35	1.35	1.35	V
		6.0V		1.8	1.8	1.8	V
Minimum HIGH Level	$V_{IN} = V_{IH} \text{ or } V_{IL}$						
Output Voltage	$ I_{OUT} \le 20 \ \mu A$	2.0V	2.0	1.9	1.9	1.9	V
		4.5V	4.5	4.4	4.4	4.4	V
		6.0V	6.0	5.9	5.9	5.9	V
	$V_{IN} = V_{IH} \text{ or } V_{IL}$						
	$ I_{OUT} \le 4.0 \text{ mA}$	4.5V	4.2	3.98	3.84	3.7	V
	$ I_{OUT} \le 5.2 \text{ mA}$	6.0V	5.7	5.48	5.34	5.2	V
Maximum LOW Level	$V_{IN} = V_{IH} \text{ or } V_{IL}$						
Output Voltage	$ I_{OUT} \le 20 \ \mu A$	2.0V	0	0.1	0.1	0.1	V
		4.5V	0	0.1	0.1	0.1	V
		6.0V	0	0.1	0.1	0.1	V
	$V_{IN} = V_{IH} \text{ or } V_{IL}$						
	$ I_{OUT} \le 4 \text{ mA}$	4.5V	0.2	0.26	0.33	0.4	V
	$ I_{OUT} \le 5.2 \text{ mA}$	6.0V	0.2	0.26	0.33	0.4	V
Maximum Input	$V_{IN} = V_{CC}$ or GND	6.0V		±0.1	±1.0	±1.0	μA
Current							
Maximum Quiescent	$V_{IN} = V_{CC}$ or GND	6.0V		8	80	160	μA
Supply Current	$I_{OUT} = 0 \ \mu A$						
	Input Voltage Maximum LOW Level Input Voltage Minimum HIGH Level Output Voltage Maximum LOW Level Output Voltage Maximum Input Current Maximum Quiescent	$\begin{tabular}{ c c c c } \hline Minimum HIGH Level \\ Input Voltage \\ \hline \\ \hline \\ Maximum LOW Level \\ Input Voltage \\ \hline \\ \hline \\ \hline \\ Minimum HIGH Level \\ Output Voltage \\ \hline \\ $	$\begin{tabular}{ c c c c c } \hline Minimum HIGH Level \\ Input Voltage & 2.0V \\ Input Voltage & 4.5V \\ \hline 6.0V \\ \hline Maximum LOW Level \\ Input Voltage & 4.5V \\ \hline 10ut Voltage & V_{IN} = V_{IH} \mbox{ or } V_{IL} \\ \hline 0utput Voltage & V_{IN} = V_{IH} \mbox{ or } V_{IL} \\ \hline 10ut \le 20 \ \mu A & 2.0V \\ \hline 4.5V \\ \hline 6.0V \\ \hline V_{IN} = V_{IH} \mbox{ or } V_{IL} \\ \hline 10ut \le 4.0 \ mA & 4.5V \\ \hline 10ut \le 5.2 \ mA & 6.0V \\ \hline Maximum LOW Level & V_{IN} = V_{IH} \mbox{ or } V_{IL} \\ \hline 10ut \le 5.2 \ mA & 6.0V \\ \hline Maximum LOW Level & V_{IN} = V_{IH} \mbox{ or } V_{IL} \\ \hline 0utput Voltage & V_{IN} = V_{IH} \mbox{ or } V_{IL} \\ \hline 10ut \le 5.2 \ mA & 6.0V \\ \hline V_{IN} = V_{IH} \mbox{ or } V_{IL} \\ \hline 10ut \le 5.2 \ mA & 6.0V \\ \hline Maximum Input & V_{IN} = V_{CC} \mbox{ or } GND & 6.0V \\ \hline Maximum Quiescent & V_{IN} = V_{CC} \mbox{ or } GND & 6.0V \\ \hline \end{tabular}$	$\begin{array}{ c c c c c } \hline Parameter & Conditions & V_{CC} & \hline Typ \\ \hline \hline \mbox{Minimum HIGH Level} \\ Input Voltage & 2.0V \\ Input Voltage & 4.5V \\ 6.0V & 6.0V \\ \hline \mbox{Maximum LOW Level} & 2.0V \\ Input Voltage & 4.5V \\ 6.0V & 6.0V \\ \hline \mbox{Minimum HIGH Level} & V_{IN} = V_{IH} \mbox{or } V_{IL} & \\ 0utput Voltage & I_{IOUT} \le 20 \ \mu A & 2.0V & 4.5V \\ 6.0V & 4.5V & 4.5 \\ 6.0V & 6.0 \\ \hline \mbox{Vin} = V_{IH} \mbox{or } V_{IL} & \\ I_{OUT} \le 20 \ \mu A & 4.5V & 4.2 \\ I_{OUT} \le 5.2 \ m A & 6.0V & 5.7 \\ \hline \mbox{Maximum LOW Level} & V_{IN} = V_{IH} \mbox{or } V_{IL} & \\ 0utput Voltage & I_{IOUT} \le 20 \ \mu A & 4.5V & 4.2 \\ \hline \mbox{IOUT} \le 5.2 \ m A & 6.0V & 5.7 \\ \hline \mbox{Maximum LOW Level} & V_{IN} = V_{IH} \mbox{or } V_{IL} & \\ 0utput Voltage & I_{IOUT} \le 20 \ \mu A & 2.0V & 0 \\ \hline \mbox{Vin} = V_{IH} \mbox{or } V_{IL} & \\ \hline \mbox{IOUT} \le 20 \ \mu A & 4.5V & 0.2 \\ \hline \mbox{Output Voltage} & V_{IN} = V_{IH} \mbox{or } V_{IL} & \\ \hline \mbox{IOUT} \le 5.2 \ m A & 6.0V & 0.2 \\ \hline \mbox{Maximum Input} & V_{IN} = V_{IH} \mbox{or } V_{IL} & \\ \hline \mbox{IOUT} \le 5.2 \ m A & 6.0V & 0.2 \\ \hline \mbox{Maximum Input} & V_{IN} = V_{CC} \mbox{or } GND & 6.0V \\ \hline \mbox{Current} & V_{IN} = V_{IN} = V_{CC} \mbox{or } GND & 6.0V \\ \hline \mbox{Maximum Quiescent} & V_{IN} = V_{CC} \mbox{or } GND & 6.0V \\ \hline \mbox{Maximum Quiescent} & V_{IN} = V_{CC} \mbox{or } GND & 6.0V \\ \hline \mbox{Maximum Quiescent} & V_{IN} = V_{CC} \mbox{or } GND & 6.0V \\ \hline \mbox{Maximum Action Particle } & V_{IN} = V_{CC} \mbox{or } GND & 6.0V \\ \hline \mbox{Maximum Quiescent} & V_{IN} = V_{CC} \mbox{or } GND & 6.0V \\ \hline \mbox{Maximum Action Particle } & V_{IN} = V_{CC} \mbox{or } GND & 6.0V \\ \hline \mbox{Maximum Quiescent} & V_{IN} = V_{CC} \mbox{or } GND & 6.0V \\ \hline \mbox{Maximum Action Particle } & V_{IN} = V_{CC} \mbox{Or } GND & 0.0 \\ \hline \mbox{Maximum Action Particle } & V_{IN} = V_{CC} \mbox{Maximum Action Particle } & V_{IN} \\ \hline \mbox{Maximum Action Particle } & V_{IN} = V_{ID} \mbox{Maximum Action Particle } & V_{ID} \mbox{Maximum Action Particle } & V_{ID} \mbox{Maximum Action Particle }$	$ \begin{array}{ c c c c c c } \hline Minimum HIGH Level \\ Input Voltage & 2.0V & 1.5 \\ Input Voltage & 4.5V & 3.15 \\ 6.0V & 4.2 \\ \hline Maximum LOW Level \\ Input Voltage & 2.0V & 0.5 \\ Input Voltage & 4.5V & 1.35 \\ 6.0V & 1.8 \\ \hline Minimum HIGH Level \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ \hline IlouTI \leq 20 \ \mu\text{A} & 2.0V & 2.0 & 1.9 \\ 4.5V & 4.5 & 4.4 \\ 6.0V & 6.0 & 5.9 \\ \hline V_{IN} = V_{IH} \text{ or } V_{IL} \\ \hline IlouTI \leq 5.2 \ m\text{A} & 6.0V & 5.7 & 5.48 \\ \hline Maximum LOW Level & V_{IN} = V_{IH} \text{ or } V_{IL} \\ \hline IlouTI \leq 5.2 \ m\text{A} & 6.0V & 0 & 0.1 \\ \hline 0.000000000000000000000000000000000$	$\begin{array}{ c c c c c } \hline Parameter & Conditions & V_{CC} & \hline Typ & Guaranteed L \\ \hline \hline$	Parameter Conditions V _{CC} Typ Guaranteed Limits Minimum HIGH Level 2.0V 1.5 1.5 1.5 1.5 Input Voltage 4.5V 3.15 3.15 3.15 3.15 Maximum LOW Level 2.0V 0.5 0.5 0.5 0.5 Input Voltage 2.0V 1.8 1.8 1.35 1.35 Minimum HIGH Level V _{IN} = V _{IH} or V _{IL} 0.0V 1.8 1.8 1.8 Minimum HIGH Level V _{IN} = V _{IH} or V _{IL} 0.0V 1.8 1.8 1.9 Output Voltage V _{IN} = V _{IH} or V _{IL} 0.0V 2.0V 2.0V 1.9 1.9 Minimum HIGH Level V _{IN} = V _{IH} or V _{IL} 0.0V 6.0V 6.0 5.9 5.9 Mupt Voltage V _{IN} = V _{IH} or V _{IL} 0.0V 6.0V 5.7 5.48 5.34 5.2 Maximum LOW Level V _{IN} = V _{IH} or V _{IL} 0.0V 0.0 0.1 0.1 0.1 Output Voltage V _{IN} = V _{IH} or V


Note 4: For a power supply of 5V \pm 10% the worst case output voltages (V_{OH}, and V_{OL}) occur for HC at 4.5V. Thus the 4.5V values should be used when designing with this supply. Worst case V_{IH} and V_{IL} occur at V_{CC} = 5.5V and 4.5V respectively. (The V_{IH} value at 5.5V is 3.85V.) The worst case leakage current (I_{IN}, I_{CC}, and I_{O2}) occur for CMOS at the higher voltage and so the 6.0V values should be used.


Symbo	, $T_A = 25^{\circ}C$, $C_L = 15 \text{ pF}$, t_r		Conditions			Тур	Guaranteed	Units	
f	Maximum Operating Fi	roquopov				50	Limit 30	MHz	
f _{MAX} Maximum Operating Frequency t _{PHL} , t _{PLH} Maximum Propagation						18	27	ns	
PHL, PLH	Delay, Clock to Output					10	21	The second	
t _{PHL}	Maximum Propagation					18	27	ns	
THE	Delay, Clear to Output								
t _{REM} Minimum Remova		ie,				10	20	ns	
	Clear to Clock								
ts	Minimum Setup Time					10	20	ns	
	Data to Clock								
t _H	Minimum Hold Time					-2	0	ns	
	Clock to Data								
t _W	Minimum Pulse Width					10	16	ns	
	Clock or Clear								
_	Example 2 Charace F , $t_r = t_f = 6$ ns (unless otherwise)								
Symbol	Parameter	Conditions	Vcc	$T_A = 25^{\circ}C$		$T_{A} = -40$ to 85°C	T _A = -55 to 125°	С	
Gymbol	i arameter	Conditions		Тур		Guaranteed	ed Limits		
f _{MAX}	Maximum Operating		2.0V	16	5	4	3		
	Frequency		4.5V	74	27	21	18		
			6.0V	78	31	24	20		
t _{PHL} , t _{PLH}	Maximum Propagation		2.0V	38	135	170	205		
	Delay, Clock to Output		4.5V	14	27	34	41		
	Maximum Decementian		6.0V	12	23	29	35		
t _{PHL}	Maximum Propagation		2.0V 4.5V	42 19	135 27	170 34	205 41		
	Delay, Clear to Output		4.3V 6.0V	19	27	29	35		
t _{REM}	Minimum Removal Time		2.0V	0	25	32	37	_	
REIN	Clear to Clock		4.5V	0	5	6	7		
			6.0V	0	4	5	6		
ts	Minimum Setup Time		2.0V	26	100	125	150		
	Data to Clock		4.5V	7	20	25	30		
			6.0V	5	17	21	25		
t _H	Minimum Hold Time		2.0V	-15	0	0	0		
	Clock to Data		4.5V	-6	0	0	0		
			6.0V	-4	0	0	0		
t _W	Minimum Pulse Width		2.0V	34	80	100	120		
	Clock or Clear		4.5V	11	16	20	24		
			6.0V	10	14	18	20		
t _r , t _f	Maximum Input Rise and		2.0V		1000	1000	1000		
	Fall Time, Clock		4.5V		500	500	500		
			6.0V		400	400	400		
t _{THL} , t _{TLH}	Maximum Output Rise		2.0V	28	75	95	110		
	and Fall Time		4.5V	11	15	19	22		
0	Dowor Dissingtion	(nor flin flor)	6.0V	9	13	16	19	+	
C _{PD}	Power Dissipation	(per flip-flop)		45					
	Capacitance (Note 5) Maximum Input								
C _{IN}				7	10	10	10		

Note 5: C_{PD} determines the no load dynamic power consumption, $P_D = C_{PD} V_{CC}^2 f + I_{CC} V_{CC}$, and the no load dynamic current consumption, $I_S = C_{PD} V_{CC} f + I_{CC}$.

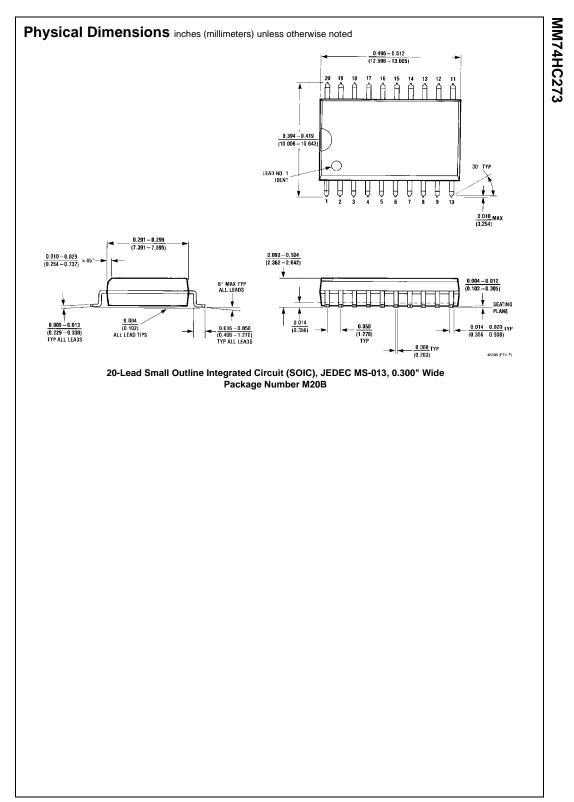

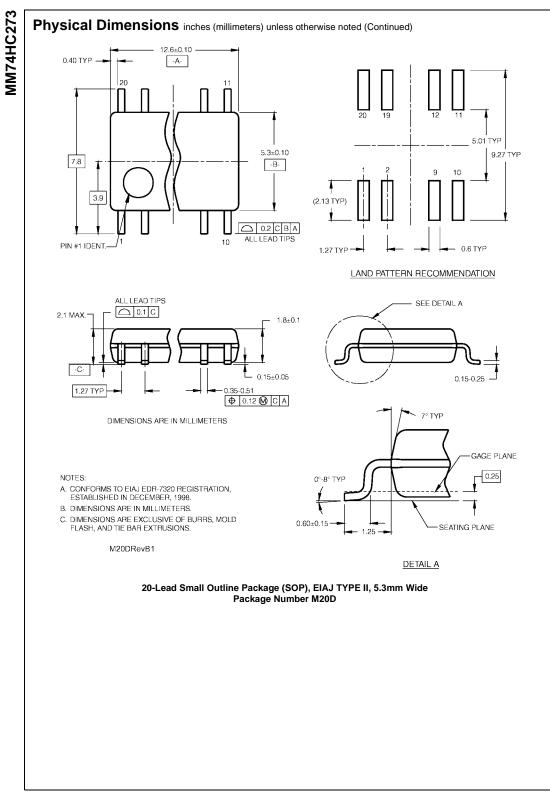

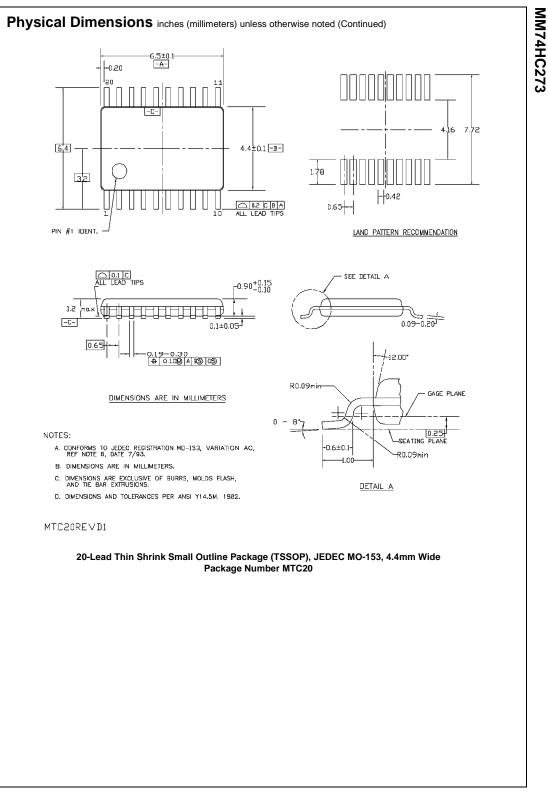

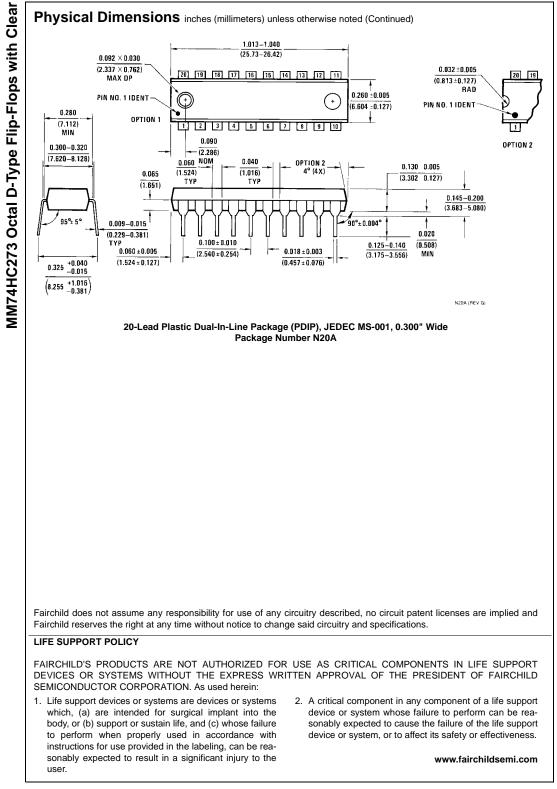

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Flip-Flops category:

Click to view products by ON Semiconductor manufacturer:

Other Similar products are found below :

NLV14027BDG NLX1G74MUTCG 703557B 5962-90606022A 5962-9060602FA NLV14013BDR2G M38510/30104BDA M38510/07106BFA NTE4598B 74LVC74APW-Q100J 74LCX16374MTDX 74LVT74D,118 74VHCT9273FT(BJ) MM74HC374WM 74LVX74MTCX CD40174BF3A HMC723LC3CTR MM74HCT574MTCX 5962-8681501RA MM74HCT273WM SN74LVC74APW SN74LVC74AD SN74HC273DWR MC74HC11ADG M74HC175B1R M74HC174RM13TR 74ALVTH16374ZQLR 74ALVTH32374ZKER 74VHCV374FT(BJ) 74VHCV574FT(BJ) SNJ54ALS574BJ SN74LVC74ADR SN74HC574PWR SN74HC374AN SN74AS574DWR SN74ALS175NSR SN74HC175D SN74AC74D 74AHC1G79GV.125 74AHC74D.112 74HC112D.652 74HC574D.652 74HCT173D.652 74HCT374D.652 74AHC574D.118 74AHCT1G79GW.125 74HC273D.652 74HC74D.653 74HC107D.652 74HC574D.653