

Mounts

art. no. MS 53 3 TO 5	art. no. MS 53 7 TO 5	art. no. MS 53 25 TO 5	art. no. MS 54 25 TO 5	art. no. MS 58 5 TO 5-8 p.
art. no. MS 58 7 TO 5-8 p.	art. no. MS 56 15 TO 5-6 p.	art. no. MS 58 15 TO 5-8 p.	art. no. MS 510 15 TO 5-10 p.	art. no. MS 3518 25 TO 5/ TO 18
art. no. MS 3518 35 TO 5/ TO 18	art. no. MS 34 518 TO 5 / TO 18	art. no. MS 183 25 TO 18	art. no. MS 184 25 TO 18	art. no. MS 183 35 TO 18
art. no. MS 184 35 TO 18	art. no. MS 183 7 TO 18	art. no. MS 184 7 TO 18	art. no. MS 84 4 TO 8	art. no. MS 923 25 TO 92
art. no. MS 4016 max. 16 contacts	art. no. US 58 4 TO 5	art. no. US 512 4 TO 5		

* = **mounting pads**: the US-pads convert the TO 5 pin circle to a pitch of .1".

material	polyamide 6, GF reinforced
temperature range	-40 °C ... +205 °C
flammability	UL 94 V-0 (at thickness ≥ 3 mm), UL 94 V-1

Profiles for PCB components
Heatsinks for PCB
Profiles for PCB mounting
Thermal conductive material

→ A ?
→ A ?
→ A ? - ?
→ E ? - ?

Insulating distance sleeves
Vibration dampers
Aluminium oxide wafers
Snap rivet

→ E ? - ?
→ E ?
→ E ? - ?
→ E ?

Mounts

Mounts for power transistors

for TO 220, TO 219, TO 202 and similar; **for vertical and horizontal mounting**; also suitable as mounting bracket for angled connections

art. no.	colour	dim. [mm]		
		A	B	C
MLW 32	white	3.2	–	7.1
MLW 38	white	3.8	0.64	7.1
MLW 44	white	4.4	1.30	7.1
MLW 51	white	5.1	1.90	7.1
MLB 32	black	3.2	–	6.5
MLB 38	black	3.8	0.64	6.5
MLB 44	black	4.4	1.30	6.5
MLB 51	black	5.1	1.90	6.5

material	polyamide 6 (nylon)
temperature range	-40 ... +120
flammability	UL 94 V-2

Mounts for rectangular LEDs

for LED 2x4 mm oder 2x5 mm; **symmetric version for easy assembly**; self-adhesive


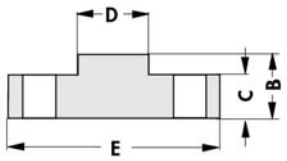
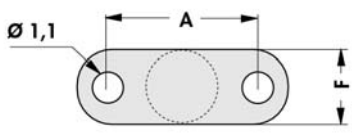

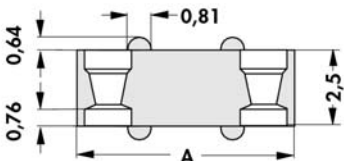
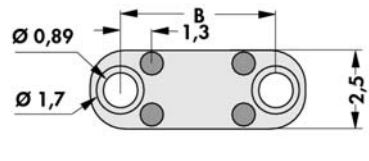

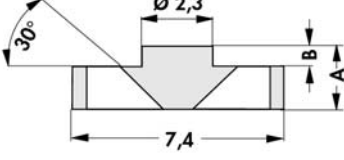
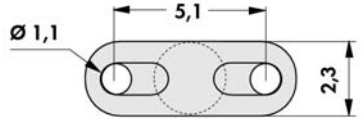
art. no.	dim. [mm]		
	A	B	C
MRL 20	2.0	0.5	1.0
MRL 30	3.0	1.0	1.0
MRL 41	4.1	1.5	1.0
MRL 51	5.1	2.0	1.0
MRL 61	6.1	1.1	3.8
MRL 71	7.1	1.7	3.8
MRL 81	8.1	2.2	3.8
MRL 89	8.9	2.5	3.8

material	polyamide 6 (nylon), white
temperature range	-40 ... +120
flammability	UL 94 V-2

Mounts

Mounts for discrete components

suitable for various components e.g. resistors, capacitors etc.

						
art. no.	dim. [mm]					
	A	B	C	D	E	F
MD A 04	2.5	1.1	0.55	1.3	4.6	2.3
MD A 06	3.8	1.1	0.55	2.3	6.9	3.2
MD A 07	5.1	1.1	0.55	2.3	7.4	2.3
MD A 08	6.4	1.1	0.66	2.3	8.6	2.3
MD A 09	7.6	1.1	0.66	3.6	9.9	2.3
MD A 12	10.2	1.1	0.76	4.8	12.4	2.3
						
art. no.	dim. [mm]					
	A			B		
MD B 07	7.6			5.1		
MD B 08	8.9			6.4		
MD B 10	10.2			7.6		
MD B 11	11.4			8.9		
MD B 12	12.7			10.2		
MD B 15	15.2			12.7		
						
art. no.	dim. [mm]					
	A			B		
MD C 13	1.3			-		
MD C 18	1.8			0.56		
MD C 22	2.2			0.89		

material	polyamide 6 (nylon)
temperature range	-30 ... +110
flammability	UL 94 V-2

Profiles for PCB components
Heatsinks for PCB
Profiles for PCB mounting
Thermal conductive material

→ A ?
→ A ?
→ A ? - ?
→ E ? - ?

Insulating distance sleeves
Vibration dampers
Aluminium oxide wafers
Snap rivet

→ E ? - ?
→ E ?
→ E ? - ?
→ E ?

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Gate Drivers](#) category:

Click to view products by [Fisher](#) manufacturer:

Other Similar products are found below :

[00028](#) [00053P0231](#) [8967380000](#) [56956](#) [CR7E-30DB-3.96E\(72\)](#) [57.404.7355.5](#) [LT4936](#) [57.904.0755.0](#) [5801-0903](#) [5803-0901](#) [5811-0902](#)
[5813-0901](#) [58410](#) [00576P0030](#) [00581P0070](#) [5882900001](#) [00103P0020](#) [00600P0005](#) [00-9050-LRPP](#) [00-9090-RDPP](#) [5951900000](#) [01-](#)
[1003W-10/32-15](#) [LTI LA6E-1S-WH-RC-FN12VXCR1](#) [0131700000](#) [00-2240](#) [LTP70N06](#) [LVP640](#) [0158-624-00](#) [5J0-1000LG-SIL](#) [020017-13](#)
[LY1D-2-5S-AC120](#) [LY2-0-US-AC120](#) [LY2-US-AC240](#) [LY3-UA-DC24](#) [00-5150](#) [00576P0020](#) [00600P0010](#) [LZNQ2M-US-DC5](#) [LZNQ2-](#)
[US-DC12](#) [LZP40N10](#) [00-8196-RDPP](#) [00-8274-RDPP](#) [00-8275-RDNP](#) [00-8609-RDPP](#) [00-8722-RDPP](#) [00-8728-WHPP](#) [00-8869-RDPP](#) [00-](#)
[9051-RDPP](#) [00-9091-LRPP](#) [00-9291-RDPP](#)