

# SLR-342 series


# LED, flat disk type, direct mount

The SLR-342 series LEDs are small, reflecting, high brightness single color LEDs.

## Dimensions (Units : mm)

### Features

- single LED per package
- diameter of lens = 3.1 mm
- height as low as 5.2 mm
- mounting pitch as small as 2.5 mm
- available in red, orange, yellow and green with choice of tinted diffused or tinted non-diffused lens
- available on tape for mounting by an automatic machine

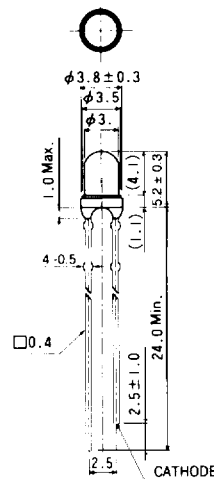

### Selection guide

Part no.	SLR-342VR	SLR-342DU	SLR-342YY	SLR-342MG
Color & wavelength	Red, 650 nm	Orange, 610 nm	Yellow, 585 nm	Green, 563 nm
Lens	Tinted diffused	Tinted diffused	Tinted diffused	Tinted diffused
Availability	standard	standard	standard	standard
Part no.	SLR-342VC	SLR-342DC	SLR-342YC	SLR-342MC
Color & wavelength	Red, 650 nm	Orange, 610 nm	Yellow, 585 nm	Green, 563 nm
Lens	Tinted non-diffused	Tinted non-diffused	Tinted non-diffused	Tinted non-diffused
Availability	standard	standard	standard	standard


### Absolute maximum ratings (T<sub>a</sub> = 25°C)

Parameter	Symbol	Limits	Unit	Conditions
Power dissipation	MG & MC type	75	mW	
	All others	60	mW	
Forward current	MG & MC type	25	mA	
	All others	20	mA	
Peak forward current	I <sub>FP</sub>	60	mA	Pulse width 1 ms, duty 20%
Reverse voltage	V <sub>R</sub>	3	V	
Operating temperature	T <sub>opr</sub>	-25 ~ +85	°C	
Storage temperature	T <sub>stg</sub>	-30 ~ +100	°C	

**Electro-optical characteristics ( $T_a = 25^\circ\text{C}$ )**

Parameter		Symbol	Min	Typical	Max	Unit	Conditions
Forward voltage	Red Orange	$V_F$		2.0	3.0	V	$I_F = 10\text{ mA}$
	Yellow Green			2.1			
Reverse current		$I_R$			10	$\mu\text{A}$	$V_R = 3\text{ V}$
Peak wavelength		$\lambda_p$		Red 650 Orange 610 Yellow 585 Green 563		nm	$I_F = 10\text{ mA}$
Spectral half-width		$\Delta\lambda$		40		nm	$I_F = 10\text{ mA}$
Emission power half angle	Non-diffused	$2\theta_{1/2}$		40		deg	
	Diffused			40			

**Figure 1 Luminous intensity vs wavelength**

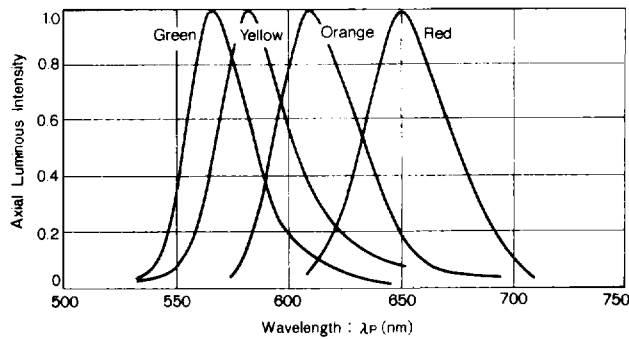

**Luminous intensity**

Part no.	Color	$\lambda_p$	Min	Typical	Max	Unit	Conditions
SLR-342VR	Red	650	3.6	10.0		mcd	For $I_F = 10\text{ mA}$
SLR-342VC			6.6	16.0		mcd	
SLR-342DU	Orange	610	3.6	10.0		mcd	
SLR-342DC			5.6	16.0		mcd	
SLR-342YY	Yellow	585	2.2	6.3		mcd	
SLR-342YC			5.6	16.0		mcd	
SLR-342MG	Green	563	5.6	16.0		mcd	
SLR-342MC			9.0	25.0		mcd	

Electrical characteristic curves 1 (Red)

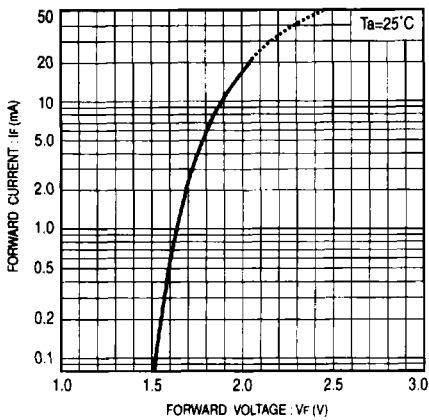


Figure 2

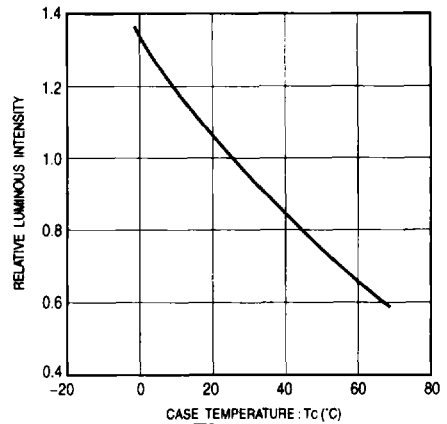


Figure 3

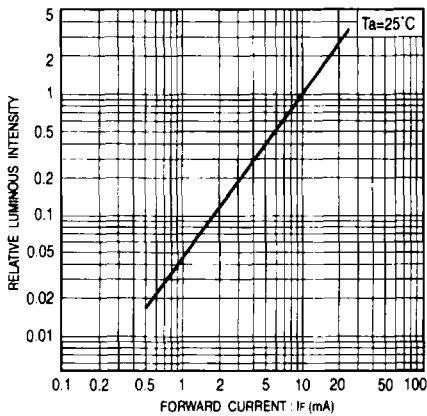


Figure 4

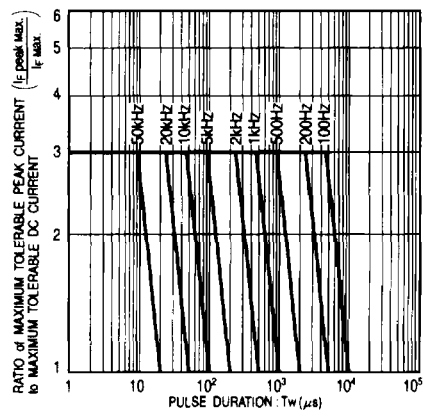


Figure 5

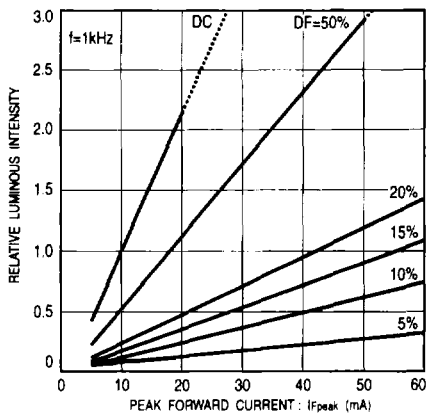


Figure 6



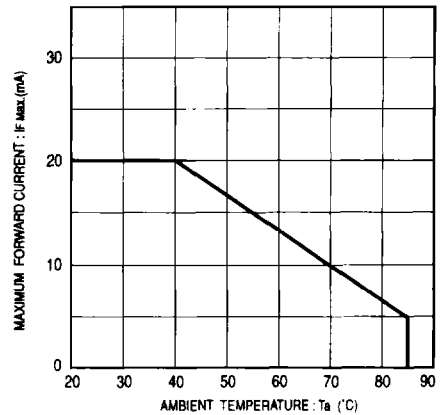


Figure 7

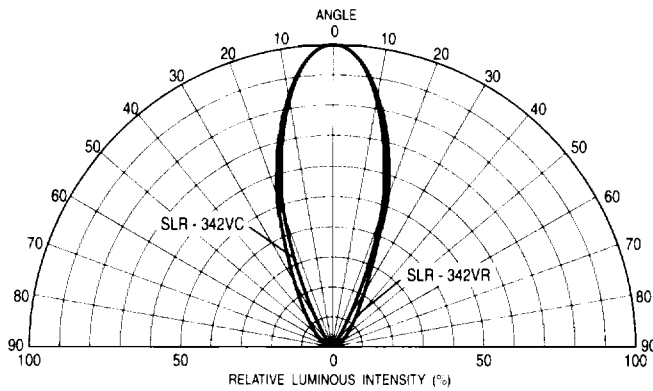


**Figure 8 Directional pattern (red)**


**Electrical characteristic curves 2 (Orange)**

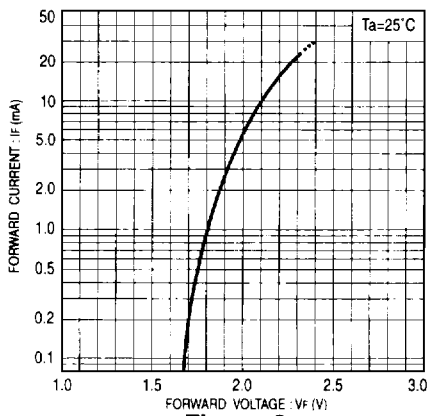


**Figure 9**

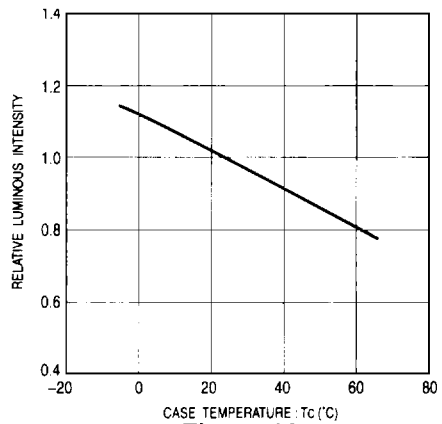

**Figure 10**

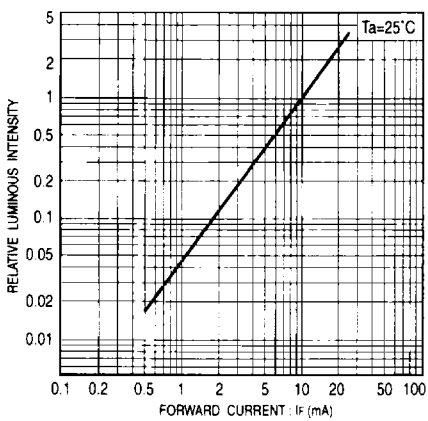

**Figure 11**

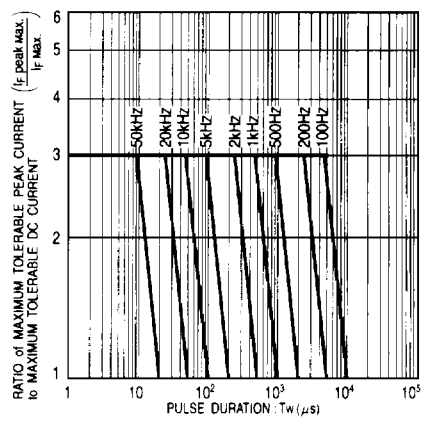

**Figure 12**

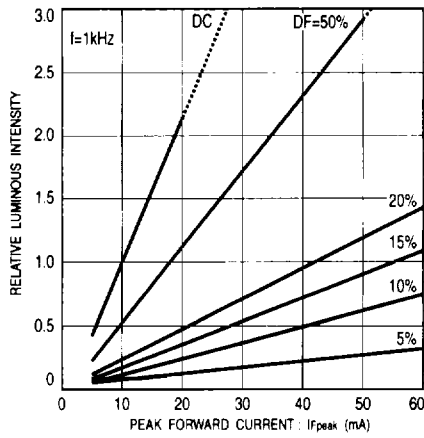


Figure 13

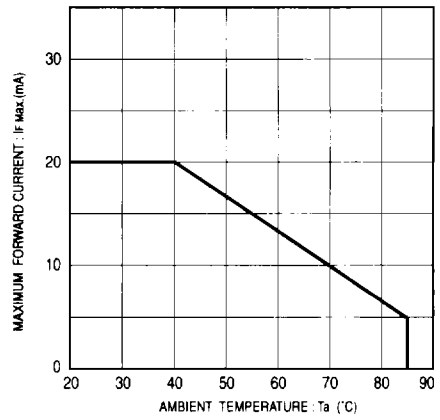


Figure 14

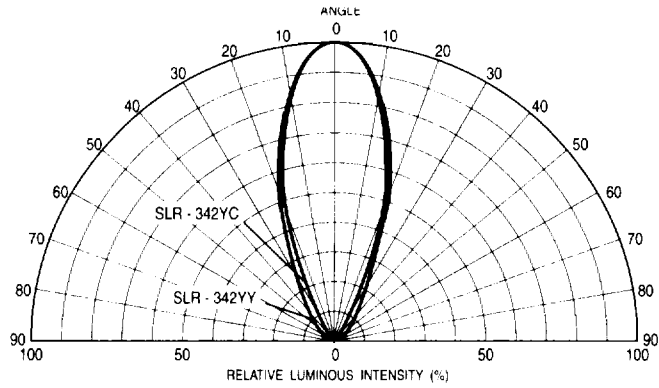


Figure 15 Directional pattern (orange)

Electrical characteristic curves 3 (Yellow)

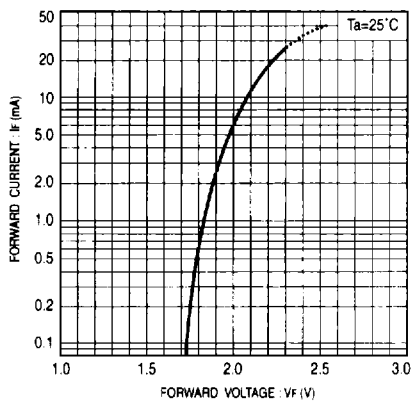


Figure 16



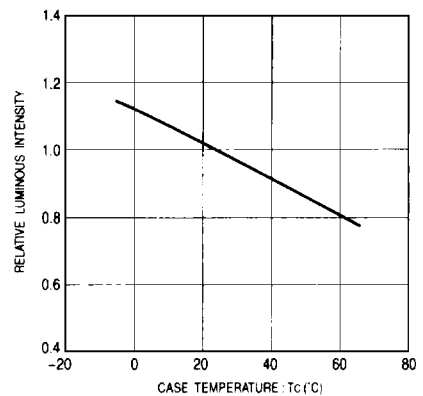



Figure 17

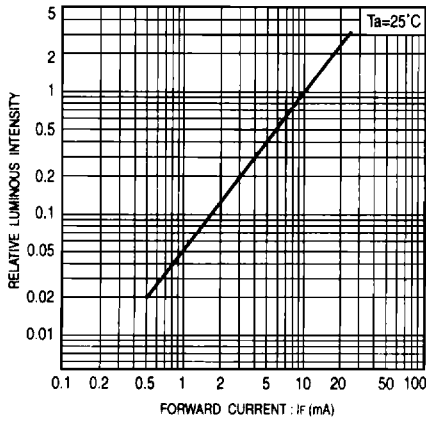


**Figure 18**

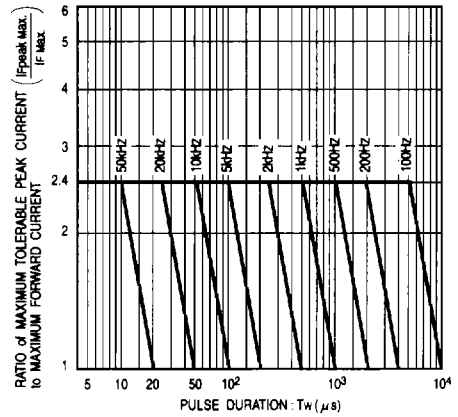


**Figure 19**

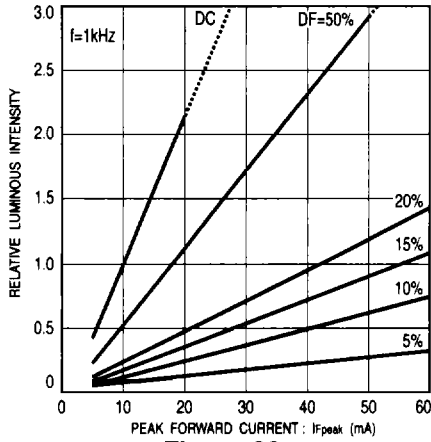

**Figure 20**

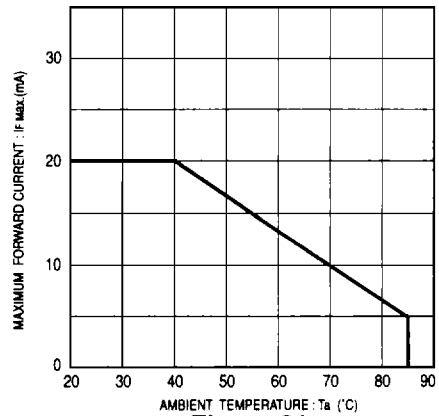

**Figure 21**

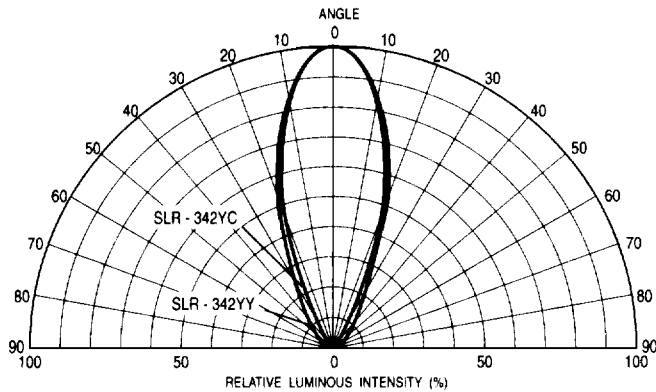

**Figure 22 Directional pattern (yellow)**

Electrical characteristic curves 4 (Green)

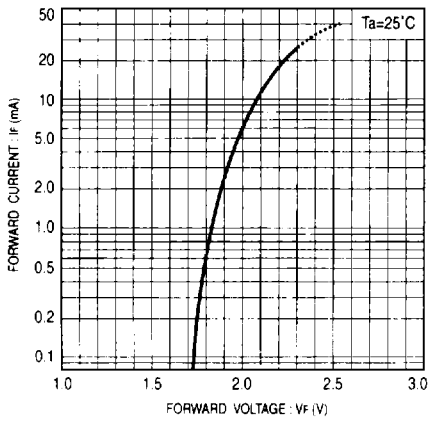


Figure 23

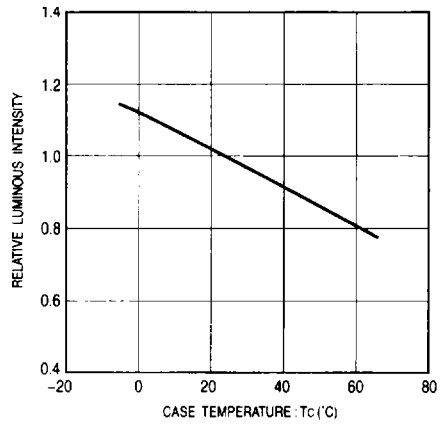


Figure 24

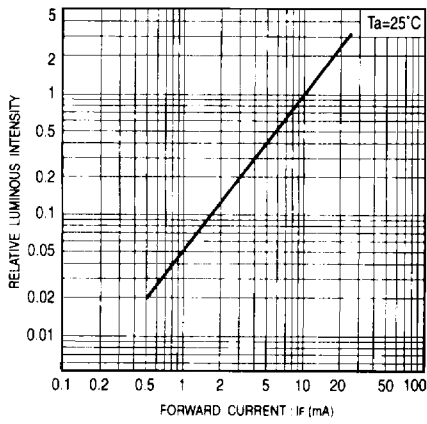


Figure 25

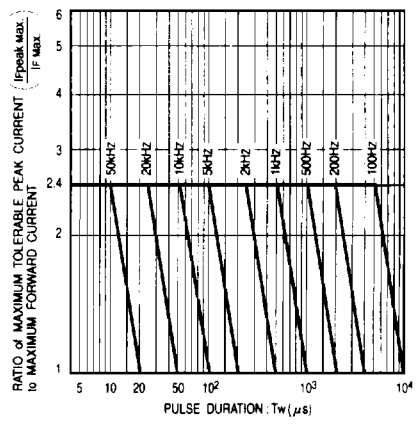


Figure 26

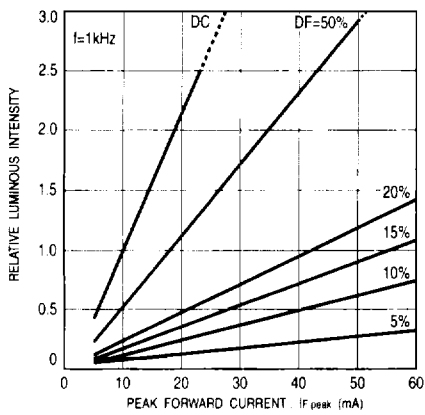


Figure 27


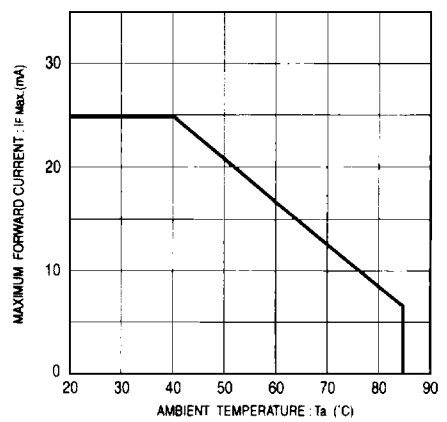


Figure 28



**Figure 29 Directional pattern (green)**

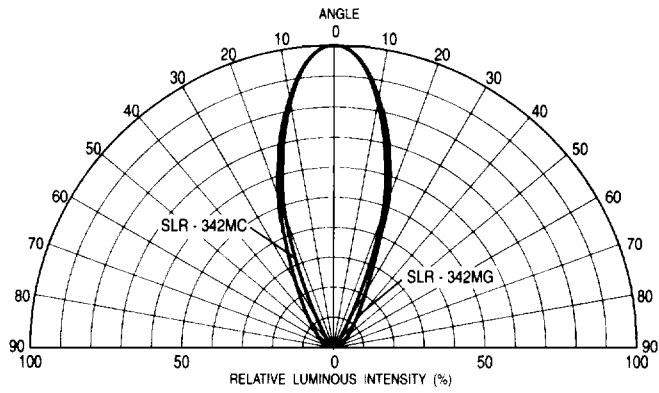

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard LEDs - Through Hole category:](#)*

*Click to view products by [ROHM manufacturer:](#)*

Other Similar products are found below :

[LTL-10254W](#) [LTL-1214A](#) [LTL-1BEDJ](#) [LTL-2231AT](#) [LTL-3251A](#) [LTL-4262N](#) [LTL-5234](#) [LTL87HTBK](#) [LTW-87HD4B](#) [7383/V7C3-BSTA-L/PR3/MS](#) [G22041431007J2C000](#) [HLMP-AG64-X10ZZ](#) [HLMP-EG1A-Z10DV](#) [HLMP-EL3B-WXKDD](#) [HLMP-HB74-UVBDD](#) [HLMP-HG65-VY0DD](#) [HLMP-HM74-34CDD](#) [HLMP-HM75-34CDD](#) [1L0532V23G0TD001](#) [NSPW500CS](#) [C4SMA-BGF-CQ34Q3C2](#) [L53GC13](#) [264-7SURTS530-A3](#) [L-C150JRCT](#) [S4SMS-BJF-CQ42QGF2](#) [S4SMS-GJF-CW12QMF2](#) [LD CQDP-1U3U-W5-1-K](#) [LNX998CKBDA](#) [LO566UHR3-70G-A3](#) [SLA560WBD2PT3](#) [LP379PPG1C0G0300001](#) [SLR-322MCT32](#) [SLR-342DUT32](#) [SLR-342MC3F](#) [SLR343BC7TT32](#) [SLR343BCTT32](#) [SLX-LX3044GD](#) [SLX-LX3044ID](#) [SLX-LX3044YD](#) [SNW-LX504SRC/4](#) [1.90690.3330000](#) [SSL-LX20483ID](#) [SSL-LX3034YD](#) [SSL-LX5093LGT-11](#) [SSL-LX5093PGC](#) [SSL-LX5093SRC/F](#) [SSL-LX5093SYT](#) [SSL-LX509E3SIT](#) [SSL-LX509FT3ID](#) [SSL-LX50FT3GD](#)