



Mechanical Dimensions: Inches [mm]

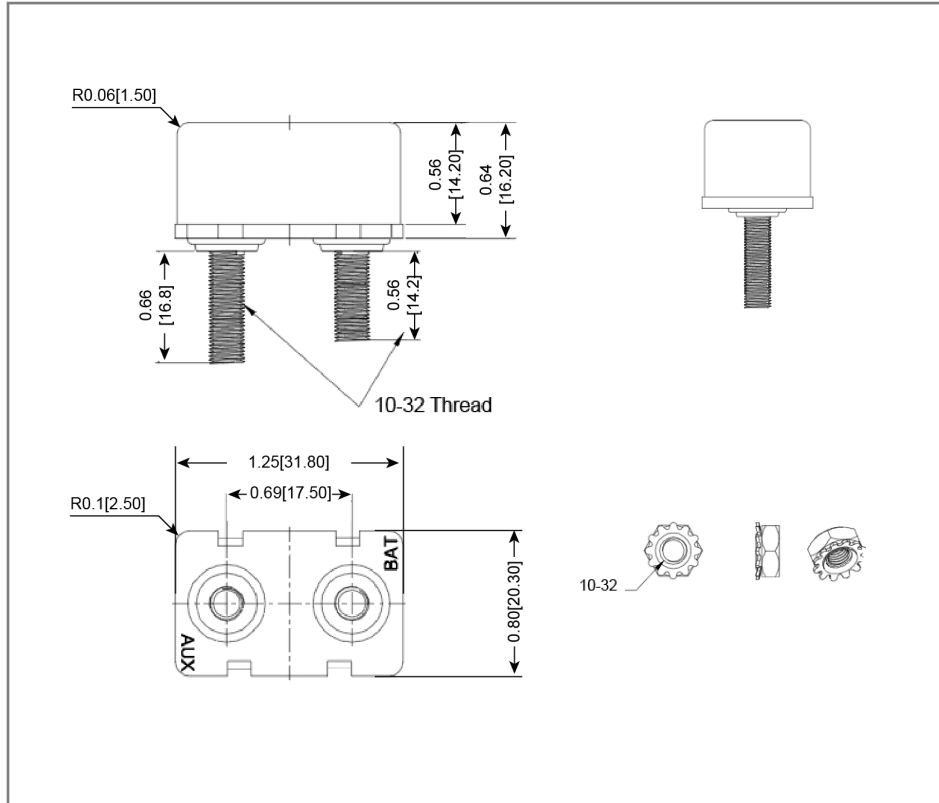

Part Numbers Information

| Optifuse P/N | Current |
|--------------|---------|
| ACBP-N-6A | 6A |
| ACBP-N-8A | 8A |
| ACBP-N-10A | 10A |
| ACBP-N-15A | 15A |
| ACBP-N-20A | 20A |
| ACBP-N-25A | 25A |
| ACBP-N-30A | 30A |
| ACBP-N-40A | 40A |
| ACBP-N-50A | 50A |

Time vs. Percent of Rated Current

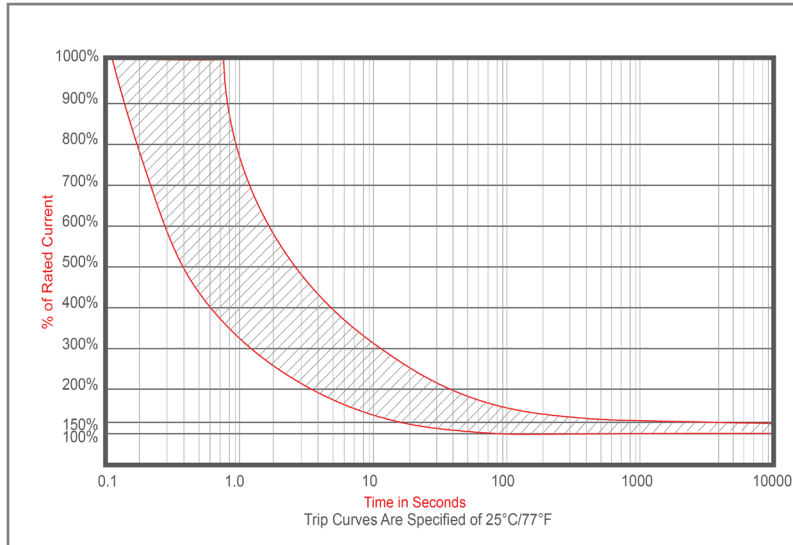

| % of Rated Current | Min Trip Time | Max Trip Time |
|--------------------|---------------|---------------|
| 150% | 1h | - |
| 200% | 4s | 29s |
| 300% | 1.2s | 10.5 |
| 400% | 600ms | 5s |
| 500% | 400ms | 2.8s |
| 600% | 300ms | 1.8s |
| 800% | 180ms | 900ms |
| 1000% | 120ms | 700ms |

Electrical Specifications

| | | |
|--------------------------------------|------------------------|---------|
| Voltage | 32VDC | PENDING |
| Reset Type | Type I - Auto Reset | |
| Limited Short Circuit Current | 1000A (UL1077) | |
| Insulation Resistance | DC 500V 100M ohm 5 sec | |
| Dielectric Strength | AC 1500V 1 minute | |

Material Specifications

| | |
|------------------------------|---|
| Body | Thermoplastic (UL94V-0) |
| Terminals | Battery – Copper Plate (0.58”), Auxiliary – Zinc Plate (0.66”) |
| Mounting Type | Chassis Mount |
| Operation Temperature | -10°C ~ 60°C |

Ambient Temperature Correction Factor

| | |
|--------|-------------------------------|
| -5 °C | (3A-4A)x 1.2, (5A-30A)x 1.12 |
| +40 °C | (3A-4A)x 0.92, (5A-30A)x 0.94 |

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping. Please multiply the current breaker current ratings by the derating factor shown below.

Example:

| | | |
|---------------------------|------------------|--|
| Normal Continuous Current | 10A | |
| Ambient Temperature | 40 °C | |
| Multiplication Factor | 0.94 | |
| Recommended Rating | $10A/0.94=10.6A$ | |
| Select the Nearest Rating | 11A | |

Rev Date of issue Revision Notes

Designed Approved

| | | | | |
|---|------------|-----------------|----|----|
| C | 06-29-2020 | Initial Drawing | RC | OF |
|---|------------|-----------------|----|----|

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Fuses](#) category:

Click to view products by [Optifuse](#) manufacturer:

Other Similar products are found below :

[HBO-10](#) [HBO-100](#) [HBO-150](#) [HBO-40](#) [HBO-50](#) [AFX-150](#) [AT-10](#) [AT-30](#) [AT-5](#) [ATM-10ID](#) [ATM-4LP](#) [ACL-50](#) [AFX-50](#) [299080](#) [HBO-15](#)
[AT-20](#) [AT-3](#) [0287015](#) [142.7010.5502](#) [FMM-15](#) [0MIN015.HXGLO](#) [2010T1.25A250V](#) [0695030.PXPS](#) [0695040.PXPS](#) [0297003.WXT](#)
[0MIN025.HXGLO](#) [0MIN030.HXGLO](#) [0695025.PXPS](#) [0695015.PXPS](#) [0695050.PXPS](#) [0695060.PXPS](#) [MRBF-075](#) [02400106P](#)
[0297002.WXT](#) [0297004.WXT](#) [0297010.WXT](#) [0297015.WXT](#) [0297020.WXT](#) [0297025.WXT](#) [0297030.WXT](#) [029707.5WXT](#) [0602925](#)
[0602930](#) [0602935](#) [0602940](#) [0602950](#) [0602960](#) [0611100](#) [0611125](#) [0611150](#)