

# Type ANR80-UL Automotive Blade Fuse Standard - Voltage 80V w/ UR Approval



www.optifuse.com (619) 593-5050


## Specifications:

- Voltage: 80V DC
- Amperage: 500mA, 1A, 2A, 3A, 4A, 5A, 6A, 7A, 7.5A, 8A, 10A, 12A, 15A, 16A, 20A, 25A, 30A, 35A, 40A
- Material:
  - Body – Nylon 66 with 30% Fiber Glass UL94V-0
  - Terminals – Copper Alloy, Tin plated
- Interrupt Rating: 1000A @ 80VDC

## Agency Standards and Listings:



## Mechanical Dimensions: Inches [mm]

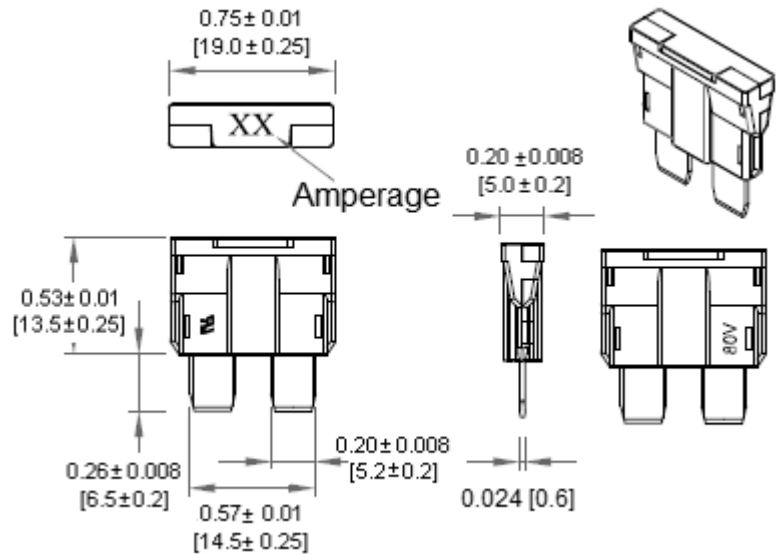

## Standards: UL248-1 Special Purpose Fuse

Time Characteristics:		
% of Rated Current	Min Hold Time	Max Hold Time
100%	Carry (35A~40A)	---
110%	Carry (500mA~30A)	---
135%	750ms	3600s
200%	150ms	60s
350%	40ms	1s
600%	10ms	100ms

Part Number	Amperage	Body Color	Voltage Drop (mV)	Cold Resistance	I <sup>2</sup> T
ANR80-UL-500MA	500mA	Dark Blue	150	290 mΩ	0.3
ANR80-UL-1A	1A	Black	125	100 mΩ	2.3
ANR80-UL-2A	2A	Gray	120	43.0 mΩ	9.6
ANR80-UL-3A	3A	Violet	110	30.0 mΩ	16.2
ANR80-UL-4A	4A	Pink	110	22.0 mΩ	36.8
ANR80-UL-5A	5A	Tan	110	16.0 mΩ	62.5
ANR80-UL-6A	6A	Light Red	---	---	---
ANR80-UL-7A	7A	Light Orange	---	---	---
ANR80-UL-7.5A	7.5A	Brown	90	9.00 mΩ	73.1
ANR80-UL-8A	8A	Light Yellow	---	---	---
ANR80-UL-10A	10A	Red	90	6.50 mΩ	210
ANR80-UL-12A	12A	Light Pink	---	---	---
ANR80-UL-15A	15A	Blue	90	4.00 mΩ	270
ANR80-UL-16A	16A	Light Green	---	---	---
ANR80-UL-20A	20A	Yellow	90	3.00 mΩ	360
ANR80-UL-25A	25A	Clear	80	1.90 mΩ	813
ANR80-UL-30A	30A	Green	80	1.65 mΩ	1530
ANR80-UL-35A	35A	Blue Green	70	1.45 mΩ	1960
ANR80-UL-40A	40A	Orange	70	1.25 mΩ	3200

## Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.


**Type ANR80-UL**  
**Automotive Blade Fuse**  
**Standard - Voltage 80V**  
**w/ UL Approval**



www.optifuse.com

(619) 593-5050

Time Current Curve Graph

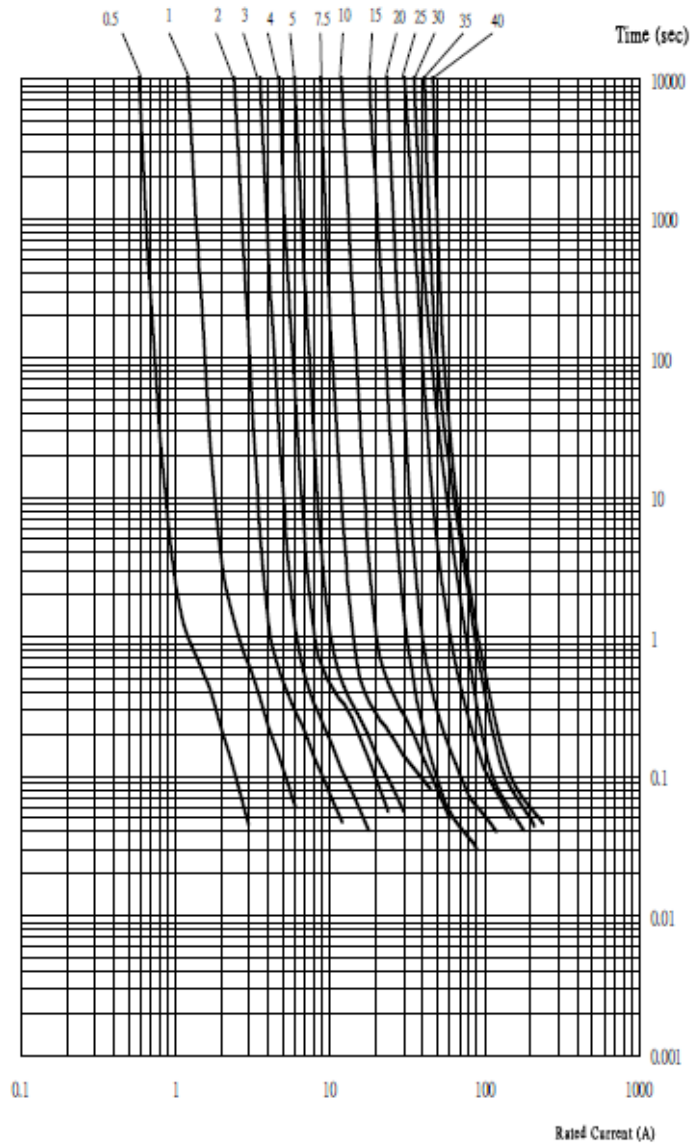

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Optifuse manufacturer](#):*

Other Similar products are found below :

[FSC-3.5A](#) [TSA-250MA](#) [BLR-304](#) [BLR-504](#) [BLC-05-GTA](#) [BLR-I-504](#) [BLM-304](#) [CBW57-EL4-10A](#) [FPK-10A](#) [FPK-1A](#) [FPK-30A](#) [LPM-08](#)  
[LPX-23B-08R-LOOP](#) [FPK-12A](#) [FPK-15A](#) [FPK-20A](#) [FPK-25A](#) [FPK-2A](#) [FPK-3A](#) [FPK-4A](#) [FPK-5A](#) [FPK-6A](#) [FPK-7A](#) [FPK-8A](#) [FPK-R-](#)  
[1.5A](#) [FPK-R-10A](#) [FPK-R-15A](#) [FPK-R-1A](#) [FPK-R-20A](#) [FPK-R-25A](#) [FPK-R-2A](#) [FPK-R-30A](#) [FPK-R-3A](#) [FPK-R-4A](#) [FPK-R-5A](#) [FPK-R-6A](#)  
[FPK-R-8A](#) [PMG-KB-01-Q2S](#) [LPM-01B-12R](#) [ACB-12-V-50A](#) [LPR-13C-10R](#) [ACBP4-PM-5A](#) [BLR-306](#) [ACB-12-V-30A](#) [CBW57-EL4-5A](#)  
[CBW57-ES-5A](#) [CBW57-PB-10A-5X](#) [CBW57-PS-10A-5X](#) [CBW57-PS-3A-1X](#) [CBW28-1A](#)