

# Type BLC-16 Fuse Block For 1/4" x 1/4" (6.3 x 32mm) Fuses



www.optifuse.com

(619)-593-5050

**Fuse Style:** 1/4" x 1/4" (6.3 x 32mm) Fuses

**Material:**

**Body:** Thermostate (UL Flame: 94V-0)

**Fuse Clips:** Copper Alloy Tinned T:0.5mm

**Terminal:** Copper Alloy Tinned T:0.8mm

**Specifications:**

**Dielectric Strength** for 60 seconds: 1200VAC Min

**Suitable Rated Current:** 25A 250V

**Insulation resistance** at 500V DC: 500M Min.

**Temperature Rise:** 30 with dummy fuse, 85 with time-delay fuse



**Voltage Drop:** 15mV Max.

**Agency Standards and Listings:**




**Product Dimensions:** Inches [mm]


Part #	# of Pins/Legs	Terminals
<b>BLC-16-B</b>	<b>no</b>	<b>Bent</b>
<b>BLC-16-B1</b>	<b>1</b>	<b>Bent</b>
<b>BLC-16-B2</b>	<b>2</b>	<b>Bent</b>
<b>BLC-16-S</b>	<b>no</b>	<b>Straight</b>
<b>BLC-16-S1</b>	<b>1</b>	<b>Straight</b>
<b>BLC-16-S2</b>	<b>2</b>	<b>Straight</b>

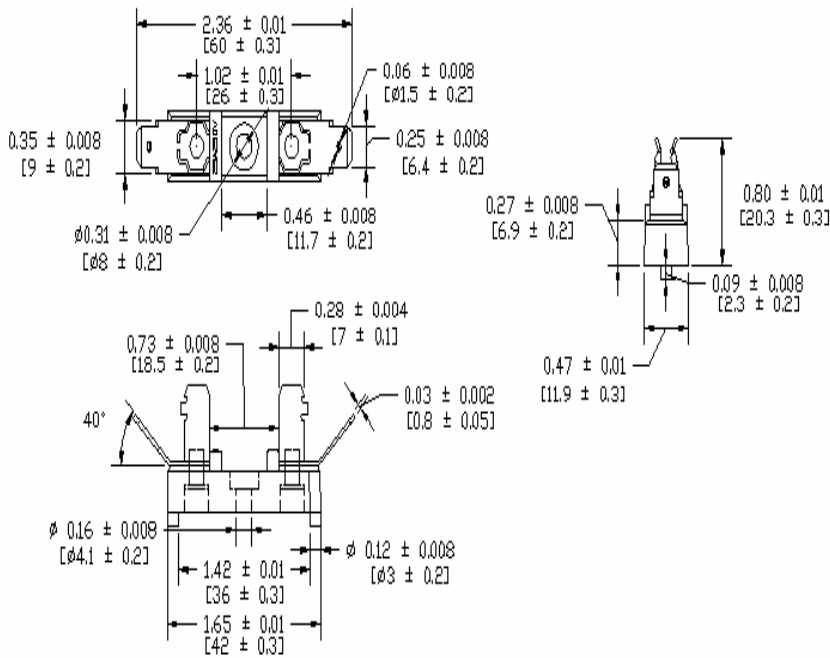


BLC-16-B




BLC-16-B1



0.77 ± 0.01  
[19.5 ± 0.2]



BLC-16-B2







Note: All specifications subject to change without notice.

# Type BLC-16 Fuse Block For 1/4" x 1 1/4" (6.3 x 32mm) Fuses




www.optifuse.com


(619)-593-5050

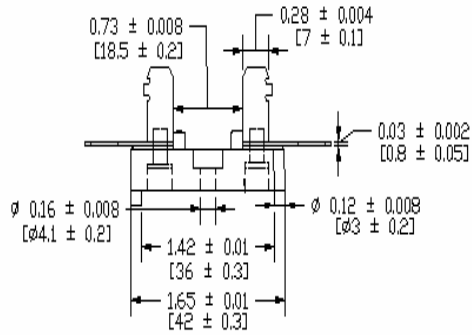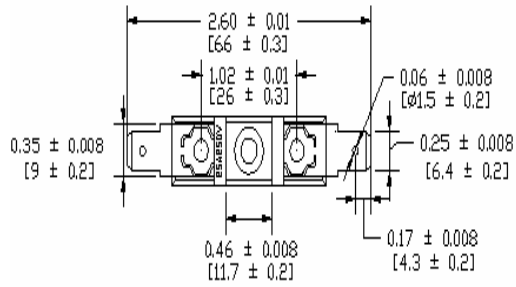


BLC-16-S




BLC-16-S1



0.77 ± 0.01 [19.5 ± 0.2]



BLC-16-S2



0.77 ± 0.01 [19.5 ± 0.2]

0.77 ± 0.01 [19.5 ± 0.2]

## Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of Fuse Block with chemical solvent. Prolonged contact will damage the device performance.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fuse Holder](#) category:*

*Click to view products by [Optifuse](#) manufacturer:*

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [020417G](#) [020418E](#) [6R30A1B](#) [F600A3B](#) [80910030](#) [8601.2020](#) [G15A2SPQ](#) [9-3557-GP REV A](#) [HDJ-B](#)  
[R6J30A3S](#) [HFH-1](#) [RF30A1S](#) [RF30A2B](#) [RF30A3SP](#) [15600-08-10](#) [BK/FHN19G](#) [BK/HHM](#) [BK/HKP-CCHH](#) [BK/HKP-JJ](#) [BK/HTJ-LES-](#)  
[FUSE](#) [HMG-241](#) [HTJ-LES-FUSE](#) [C4044-1](#) [2086-1](#) [2193](#) [2602](#) [2650](#) [178.000100](#) [FHN31G1](#) [T30A2B](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [HKP-](#)  
[CCHH](#) [R6F30A2S](#) [341001A](#) [345621A](#) [CVRMCC](#) [4202](#) [4407](#) [4408](#) [4413](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#)