

MINIATURE FUSES



SIBA Miniature Fuses

Sizes:

- Cylindrical fuses: 5 x 20 · 6.3 x 32 · 5 x 25
5 x 30 · 8 x 50 · 8 x 85
10 x 85 · 8 x 120 · 8 x 150 mm
- Radial lead
- 2 pin fuses: KS, Ø 8.4 mm
- SMD fuses:

Voltage ratings: 65 V - 10 kV

Operation class: **F** fast acting
T time lag
M medium time lag
FF very fast acting

Standards: IEC 60127
DIN VDE 0820
CEE4
UL 248-14
UL 512
CSA-C22.2 No. 248.14

Approvals:



SEV, BEAB

Features / Benefits

- ▷ Very high interrupting rating up to 70 kA
- ▷ High rated voltages up to 10 kV
- ▷ High fuse ratings available for semiconductor protection
- ▷ Fuse bases, clips and accessories are available




MINIATURE FUSES
CERAMIC TUBE

FF

Size **5 x 20 mm** Rated voltage **250 V** **very fast acting** Standard **not standardized**

Rated current	Part No.	Voltage drop mV	Pre-arcing I ² t _s -value A ² s	Rated breaking capacity	Power dissipation W	cURus	Weight (kg/100)	Pack
100 mA	70 001 40	4000	0.0016	300 kA	0.4	✓	0.14	100
125 mA	70 001 40	3500	0.0024	300 kA	0.5	✓	0.14	100
160 mA	70 001 40	1300	0.004	300 kA	0.3	✓	0.14	100
200 mA	70 001 40	1100	0.008	300 kA	0.3	✓	0.14	100
250 mA	70 001 40	1000	0.019	300 kA	0.3	✓	0.14	100
315 mA	70 001 40	900	0.03	300 kA	0.3	✓	0.14	100
400 mA	70 001 40	850	0.065	300 kA	0.4	✓	0.14	100
500 mA	70 001 40	800	0.12	300 kA	0.4	✓	0.14	100
630 mA	70 001 40	700	0.17	300 kA	0.5	✓	0.14	100
800 mA	70 001 40	600	0.26	300 kA	0.5	✓	0.14	100
1 A	70 001 40	750	0.17	300 kA	0.8	✓	0.14	100
1.25 A	70 001 40	750	0.26	300 kA	1.0	✓	0.14	100
1.6 A	70 001 40	700	0.31	300 kA	1.2	✓	0.14	100
2 A	70 001 40	650	0.64	300 kA	1.3	✓	0.14	100
2.5 A	70 001 40	600	0.88	300 kA	1.5	✓	0.14	100
3.15 A	70 001 40	550	1.6	300 kA	1.8	✓	0.14	100
4 A	70 001 40	500	3.2	300 kA	2.0	✓	0.14	100
5 A	70 001 40	500	5.9	300 kA	2.4	✓	0.14	100
6.3 A	70 001 40	450	10	1500 A	2.8		0.14	100
8 A	70 001 40	400	19	1500 A	3.2		0.14	100
10 A	70 001 40	400	30	1500 A	4.0		0.14	100
6.3 A	70 007 40	250	1.6	300 kA	2.8	✓	0.14	100
8 A	70 007 40	250	4.5	300 kA	3.0	✓	0.14	100
10 A	70 007 40	200	8.8	300 kA	3.4	✓	0.14	100
12.5 A	70 007 40	200	15	300 kA	4.0	✓	0.14	100





Pre-arcing time limits

Part No. 70 001 40

Rated current	1.0 I _{rat}	2.0 I _{rat}	2.75 I _{rat}	4 I _{rat}	10 I _{rat}
160 mA	> 1 h	> 1 h	> 1 h	< 60 ms	< 6 ms
800 mA					
1 A	> 1 h	15 ms	4 ms	1 ms	< 3 ms
10 A		1 s	100 ms	25 ms	

Part No. 70 007 40

Rated current	1.2 I _{rat}	1.5 I _{rat}	2.75 I _{rat}	4 I _{rat}	10 I _{rat}
6.3 A	> 1 h	< 30 min	4 ms	1 ms	< 1 ms
12.5 A			300 ms	30 ms	

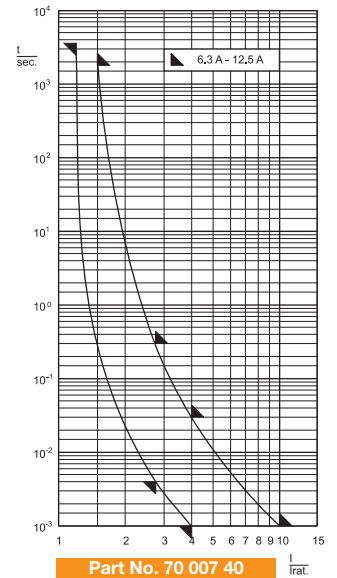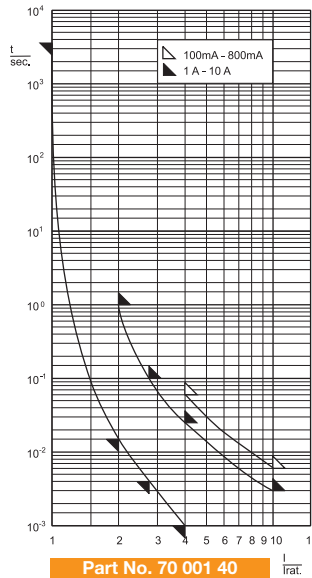

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [siba](#) manufacturer:

Other Similar products are found below :

[154000.0,25](#) [154000.1,5](#) [154000.3,15](#) [157000.0,062](#) [154000.2,5](#) [154000.3](#) [158000.0,25](#) [158000.0,63](#) [158000.0,75](#) [158000.1](#) [158000.1,6](#)
[157000.0,125](#) [158000.0,315](#) [158000.0,375](#) [158000.0,4](#) [158000.0,5](#) [158000.4](#) [158000.5](#) [158000.7](#) [160000.0,032](#) [160000.0,04](#) [160000.0,063](#)
[160000.0,08](#) [160000.0,125](#) [160000.0,2](#) [160000.0,315](#) [160000.1](#) [160000.1,6](#) [160000.2,5](#) [160000.3,15](#) [160000.4](#) [160000.0,05](#) [160000.0,16](#)
[160000.0,4](#) [160000.0,63](#) [160000.2](#) [2000413.40](#) [2000413.25](#) [50-124-06 25A](#) [160000.0,315-GT](#) [166050.0,063](#) [2000313.100](#) [2800104](#)
[5017906.20](#) [20-412-20 160A](#) [20-001-13 125A](#) [20-000-13 100A](#) [20-001-13 160A](#) [70-125-40 10A](#) [60-033-05 6A](#)