


Application

Precision video cables are used in critical analog and digital video circuits and high quality applications such as live broadcast (HDTV/SDI) in network studios and pre- or post-production facilities.

Construction & Dimensions

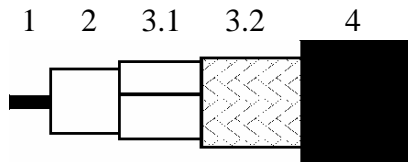

- 1. Conductor**
- 2. Dielectric**
- 3.1 Foil**
- 3.2 Braid**
- 4. Jacket**

- 1. Inner Conductor** Innenleiter - Conduttore Interno – Conducteur – Conductor - Проводник
Material solid, bare copper
Diameter 0.8 mm (20 AWG)
RG Type 59/U
- 2. Dielectric** Dielektrikum – Dielettrico – Diélectrique – Dieléctrico - Диэлектрик
Material gas injected HDPE
Diameter over insulation 3.68 mm
- 3. Outer Conductor** Aussenleiter - Conduttore Esterno - Conducteur extérieur - Conductor externo - Внешний проводник
Material foil + braid
Diameter screen 4.5 mm
 - 3.1 Shielding foil** Duofoil®
Coverage: 100%
 - 3.2 Shielding braid** tinned copper braid
Coverage 95%
- 4. Jacket** Aussenmantel – Guaina – Gaine – Revestimiento - Оболочка
Material FRNC (LSNH)
Diameter: 5.92 ± 0.2 mm
Color and text: see table Marking

Requirements and test methods

Electrical characteristics

Mean characteristic impedance:	75 ± 1.5 Ω
Wellenwiderstand - Impedenza Caratteristica Principale - Impédance nominale - Características eléctricas - Электрические характеристики	
Nominal capacitance conductor to shield:	53 pF/m
Kapazitaet - Capacità Nominale Conduttore/Schermo - Capacité nominale entre conducteur et blindage - Capacitancia nominal de conductor a blindaje - Номинальная емкость "проводник-экран"	
Nominal velocity of propagation:	83%
Ausbreitungsgeschwindigkeit - Velocità Nominale di Propagazione - Vitesse de propagation nominale - Velocidad nominal de propagación - Номинальная скорость распространения сигнала	
Nominal Delay:	4.003 ns/m

1505ANH FRNC Precision Video Cable

Rev. 2/ 2005-01-05 DRAFT 2/2

Nom. inner conductor DC resistance @ 20 °C: 32 Ω/km

Gleichstromwiderstand Innenleiter - Resistenza Nominale DC del Conduttore Interno - Résistance du conducteur intérieur - Resistencia CC nominal del conductor interno - Номин. сопротивление пост. тока внутреннего проводника при

Nom. outer conductor DC resistance @ 20 °C: 12 Ω/km

Gleichstromwiderstand Aussenleiter - Resistenza Nominale DC del Conduttore Esterno - Résistance du conducteur extérieur - Resistencia CC nominal del conductor externo - Номин. сопротивление пост. тока внутреннего проводника при

Return loss at 5- 850 MHz: ≥ 23 dB
851-3000 MHz: ≥ 21 dB

Rueckflussdaempfung - Perdite Cumulative di Riflessione - Taux de réflexion du signal - Pérdida de retorno - Обратные потери на

Nominal Attenuation: Wellendaempfung - Attenuazione Nominale – Affaiblissement - Atenuación nominal - Номинальное затухание

MHz	dB/100m	MHz	dB/100m
1	0.9	360	14.4
3.58	1.9	540	18.0
5	2.0	720	20.1
71.5	6.8	1500	30.5
135	8.8	2250	38.0
270	12.4	3000	43.9

Flame Resitance: CEI 20-22 III (acc. EN50266-2-4, IEC 60332-3-24 cat.C)
CEI 20-37/2/5/7 (acc. EN50267-2-1, 50268-2, NES 713)



Mechanical and physical characteristics

Temperature range - storage/operation -30°C to +70°C
Temperature range - installation -5 °C to + 70°C

Minimum bending radius 10x Ø cable

Biegeradius - Raggio Minimo di Curvatura - Rayon de courbure minimum - Radio de curvatura mínimo - Минимальный радиус изгиба

Nominal cable weight 46.1 kg/km

Gewicht - Peso Nominale del Cavo – Poids - Peso nominal del cable - Номинальный вес кабеля

Ordering information

MARKING

Jacket colour	Text
black	BELDEN 1505ANH FRNC CEI 20-22III CEI 20-37/2/5/7

Meter marking: yes, MM-YY: month and year of manufacturing

PACKAGING (PUT-UP, +/-2%)

305m reels

Each reel is labelled with the following data: Belden Logo, Belden code number, item description, length on the reel and date of manufacturing.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [belden manufacturer](#):

Other Similar products are found below :

[HIPWP4LA](#) [HIPWP2LA](#) [49905A 060S2](#) [49907A 060S2](#) [8916-BRN-100](#) [8916-GRN/YEL-500](#) [8916-YEL-500](#) [8918-GRY-1000](#) [8919-DK-BLU-100](#) [8920-008-1000](#) [8920-BRN-1000](#) [8920-GRY-1000](#) [5T00UP 008500](#) [7810A-BLK-500](#) [7860NBH](#) [7934A-BLK-1000](#) [7937A-BLK-1000](#) [8019-100](#) [8080](#) [8108-060-1000](#) [8125-CHR-100](#) [8132-CHR-1000](#) [8133-CHR-1000](#) [8155-CHR-1000](#) [8162-060-1000](#) [8162-CHR-1000](#) [8164-CHR-100](#) [8164-CHR-1000](#) [8185-CHR-100](#) [8205-CHR-1000](#) [8221-BLK-1000](#) [8233-010-1000](#) [8233-BLK-1000](#) [8237-BLK-500](#) [8238-BLK-500](#) [8241-006-U1000](#) [8241A-BLK-1000](#) [8241F-RED-MATTE-1000](#) [8263-BLK-U1000](#) [8279-BLK-1000](#) [8281-003-1000](#) [8281 010500](#) [83000 002100](#) [83002 0101000](#) [83003-006-500](#) [83003-VIO-500](#) [83004-RED-100](#) [83008 0091000](#) [83008-WHT-1000](#) [83010-BRN-100](#)