

Type FPK
Class M
Supplementary Protection
Fast Acting - 13/32”x 1-1/2”



www.optifuse.com (619) 593-5050

For use as supplemental protection in general purpose and lighting applications.

Electrical:

600VAC – 100mA - 50A
 600VDC – 100mA - 30A

Interrupt Ratings:

100,000A @ 600VAC (100mA – 30A)
 10,000A @ 600VAC (35A – 50A)
 100,000A @ 600VDC (100mA – 30A)

Supplementary Protection Only –


Not rated for branch circuit protection.

Agency Standards and Listings:

RoHS
 Compliant

100mA-30A - DC listed to UL Standard 248-14

Mechanical Dimensions:

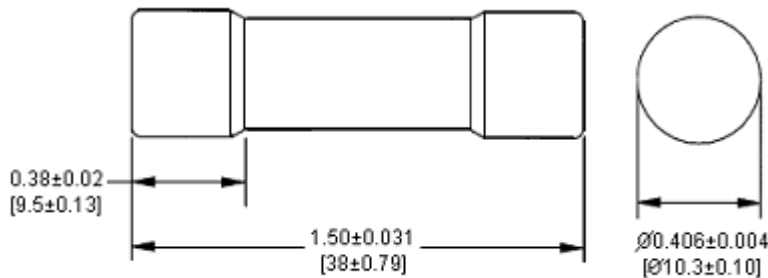

| Part Number | Ampere Rating |
|-------------|---------------|
| FPK-100mA | 100mA |
| FPK-125mA | 125mA |
| FPK-143mA | 143mA |
| FPK-200mA | 200mA |
| FPK-250mA | 250mA |
| FPK-500mA | 500mA |
| FPK-750mA | 750mA |
| FPK-1A | 1A |
| FPK-1.5A | 1.5A |
| FPK-2A | 2A |
| FPK-3A | 3A |
| FPK-4A | 4A |
| FPK-5A | 5A |
| FPK-6A | 6A |
| FPK-7A | 7A |
| FPK-8A | 8A |
| FPK-10A | 10A |
| FPK-12A | 12A |
| FPK-15A | 15A |
| FPK-20A | 20A |
| FPK-25A | 25A |
| FPK-30A | 30A |
| FPK-30/35A | 30/35* |
| FPK-30/40A | 30/40* |
| FPK-30/50A | 30/50* |

* momentary in-rush capability

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.


-Avoid contact of fuse with chemical solvent. Prolonged contact may damage the device performance.

Type FPK
UL Class M
Supplementary Protection
Fast Acting - 13/32"x 1-1/2"



www.optifuse.com (619) 593-5050

Time Current Curve Graphs

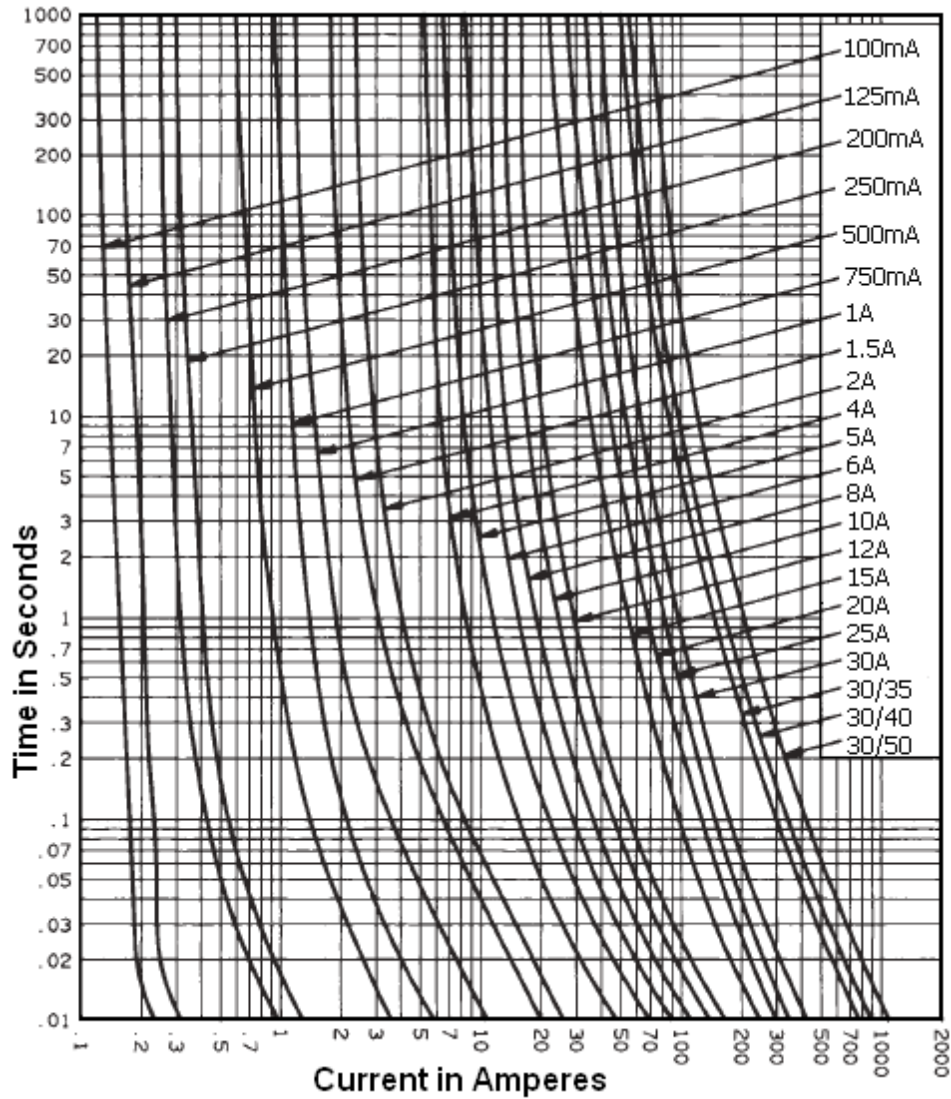

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial & Electrical Fuses](#) category:

Click to view products by [Optifuse](#) manufacturer:

Other Similar products are found below :

[MTH-4](#) [MTH-8](#) [BP/NON-30](#) [NLN2](#) [NLN25](#) [KTN-R-10](#) [LPS-RK-2SP](#) [ABU-35](#) [FLSR100](#) [BLF6](#) [KLK003](#) [LPS-RK-100](#) [LPS-RK-15](#) [LPS-RK-20](#) [LPS-RK-70](#) [LPS-RK-90](#) [NLS10](#) [FRN-R-30ID](#) [FRS-R-20ID](#) [KLK015](#) [CHSF-80](#) [LDFJ350.X](#) [FUSE](#) [5A/32V](#) [FK-1](#) [381455](#) [384515](#) [371050](#) [371055](#) [371060](#) [381050](#) [442015](#) [491315](#) [491335](#) [492138](#) [004184220](#) [004184223](#) [004184228](#) [004184230](#) [004184232](#) [004185224](#) [004181214](#) [432001](#) [FPK-10A](#) [FPK-12A](#) [FPK-15A](#) [FPK-1A](#) [FPK-20A](#) [FPK-25A](#) [FPK-2A](#) [FPK-30A](#) [FPK-3A](#)