

MINIATURE FUSES



SIBA Miniature Fuses

Sizes:

- Cylindrical fuses: 5 x 20 · 6.3 x 32 · 5 x 25
5 x 30 · 8 x 50 · 8 x 85
10 x 85 · 8 x 120 · 8 x 150 mm
- Radial lead
- 2 pin fuses: KS, Ø 8.4 mm
- SMD fuses:

Voltage ratings: 65 V - 10 kV

Operation class: **F** fast acting
T time lag
M medium time lag
FF very fast acting

Standards: IEC 60127
DIN VDE 0820
CEE4
UL 248-14
UL 512
CSA-C22.2 No. 248.14

Approvals:



SEV, BEAB

Features / Benefits

- ▷ Very high interrupting rating up to 70 kA
- ▷ High rated voltages up to 10 kV
- ▷ High fuse ratings available for semiconductor protection
- ▷ Fuse bases, clips and accessories are available




MINIATURE FUSES
CERAMIC TUBE

FF

Size **5 x 20 mm** Rated voltage **250 V** **very fast acting** Standard **not standardized**

Rated current	Part No.	Voltage drop mV	Pre-arcing I ² t _s -value A ² s	Rated breaking capacity	Power dissipation W	cURus	Weight (kg/100)	Pack
100 mA	70 001 40	4000	0.0016	300 kA	0.4	✓	0.14	100
125 mA	70 001 40	3500	0.0024	300 kA	0.5	✓	0.14	100
160 mA	70 001 40	1300	0.004	300 kA	0.3	✓	0.14	100
200 mA	70 001 40	1100	0.008	300 kA	0.3	✓	0.14	100
250 mA	70 001 40	1000	0.019	300 kA	0.3	✓	0.14	100
315 mA	70 001 40	900	0.03	300 kA	0.3	✓	0.14	100
400 mA	70 001 40	850	0.065	300 kA	0.4	✓	0.14	100
500 mA	70 001 40	800	0.12	300 kA	0.4	✓	0.14	100
630 mA	70 001 40	700	0.17	300 kA	0.5	✓	0.14	100
800 mA	70 001 40	600	0.26	300 kA	0.5	✓	0.14	100
1 A	70 001 40	750	0.17	300 kA	0.8	✓	0.14	100
1.25 A	70 001 40	750	0.26	300 kA	1.0	✓	0.14	100
1.6 A	70 001 40	700	0.31	300 kA	1.2	✓	0.14	100
2 A	70 001 40	650	0.64	300 kA	1.3	✓	0.14	100
2.5 A	70 001 40	600	0.88	300 kA	1.5	✓	0.14	100
3.15 A	70 001 40	550	1.6	300 kA	1.8	✓	0.14	100
4 A	70 001 40	500	3.2	300 kA	2.0	✓	0.14	100
5 A	70 001 40	500	5.9	300 kA	2.4	✓	0.14	100
6.3 A	70 001 40	450	10	1500 A	2.8		0.14	100
8 A	70 001 40	400	19	1500 A	3.2		0.14	100
10 A	70 001 40	400	30	1500 A	4.0		0.14	100
6.3 A	70 007 40	250	1.6	300 kA	2.8	✓	0.14	100
8 A	70 007 40	250	4.5	300 kA	3.0	✓	0.14	100
10 A	70 007 40	200	8.8	300 kA	3.4	✓	0.14	100
12.5 A	70 007 40	200	15	300 kA	4.0	✓	0.14	100





Pre-arcing time limits

Part No. 70 001 40

Rated current	1.0 I _{rat}	2.0 I _{rat}	2.75 I _{rat}	4 I _{rat}	10 I _{rat}
160 mA	> 1 h	> 1 h	> 1 h	< 60 ms	< 6 ms
800 mA					
1 A	> 1 h	15 ms	4 ms	1 ms	< 3 ms
10 A		1 s	100 ms	25 ms	

Part No. 70 007 40

Rated current	1.2 I _{rat}	1.5 I _{rat}	2.75 I _{rat}	4 I _{rat}	10 I _{rat}
6.3 A	> 1 h	< 30 min	4 ms	1 ms	< 1 ms
12.5 A			300 ms	30 ms	

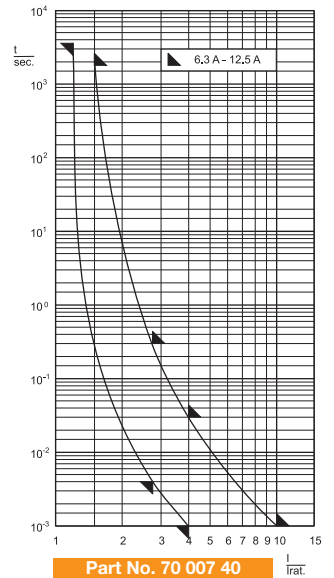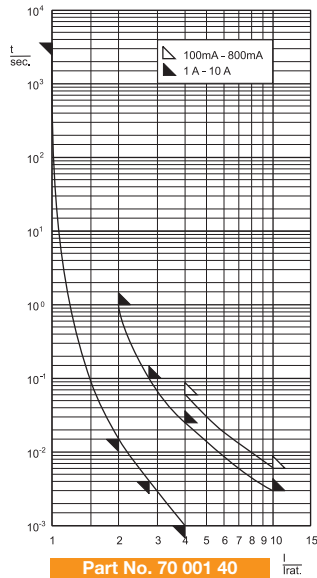

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Specialty Fuses](#) category:

Click to view products by [Siba](#) manufacturer:

Other Similar products are found below :

[63NZ02GL](#) [714125](#) [722134](#) [80NH00GR-6](#) [FWH-200A](#) [FWP-32A14F](#) [FWP-50](#) [HBM-25](#) [12LCT](#) [12TDLSJ63](#) [REN-3](#) [15.5CAVH2E](#) [ECF-2](#)
[ECF-4](#) [ECF-6](#) [170M0213](#) [170M1314](#) [170M1369-D](#) [170M3809D](#) [BK/F02A-2AS](#) [BK/F02B-1A](#) [N-2-1/2](#) [N-3-2/10](#) [NITD2](#) [20D16](#) [20D16SC](#)
[20D27FB](#) [KAA-3](#) [KAB-2](#) [KAB-30](#) [KAJ-60](#) [KAW-3](#) [2D16](#) [LKN-125B](#) [16D27SB](#) [170M1564D](#) [170M2616](#) [170M2668](#) [170M4161](#)
[170M4241](#) [170M4699](#) [ESD63](#) [ABS-25](#) [ABS-30](#) [ABS-8](#) [ACF-15](#) [ACF-30](#) [ACO-30](#) [SSD10](#) [200NH1M](#)