

Keyword:
 Standard Use and Stand-By

Model: SL-350

Performance Data Size ½AA
 (Typical values for batteries stored at 25 °C for one year)


System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	1.2 Ah
Nominal current	0.6 mA
Max. continuous discharge current	6 mA
Anode surface area	6 cm ²
Lithium content	0.35 g
Weight	9 g
Volume	4.3 cm ³
Temperature range	-55...+85 °C

WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety



Typical Discharge Curves at +25°C

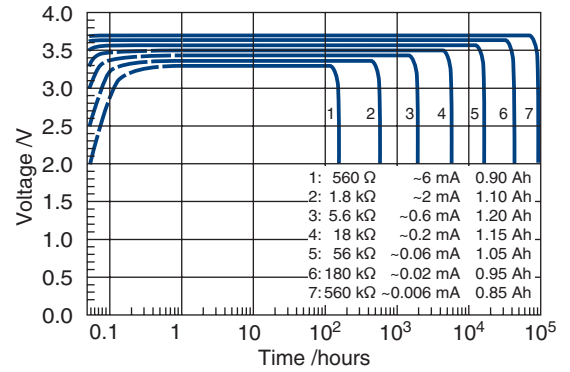

Available Capacity

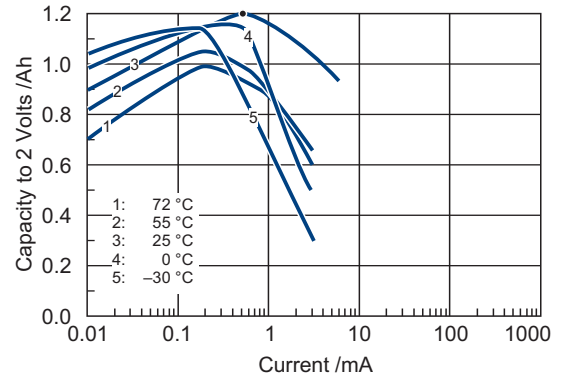

Operating Voltage

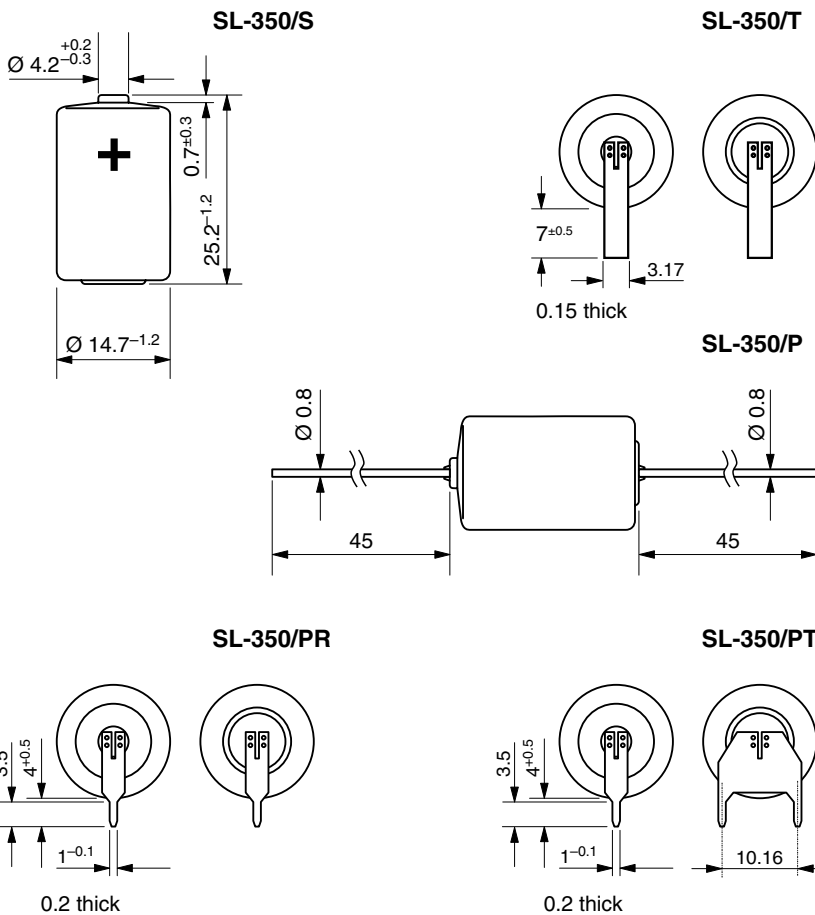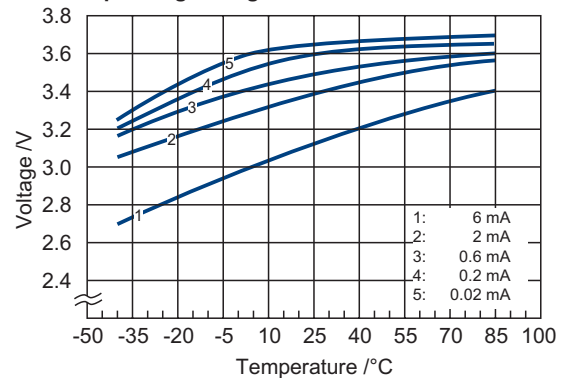

Available Terminations

SL-350/S	Standard
SL-350/T	Tags
SL-350/P	Pins
SL-350/PR	Pins Radial
SL-350/PT	Polarized Tags

Catalogue No.

11 1 03501 00
11 1 03502 00
11 1 03503 00
11 1 03506 00
11 1 03508 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [tadiran](#) manufacturer:

Other Similar products are found below :

[TL-5242](#) [TL-5104/SBP](#) [TL5902/T](#) [TL-5903/P](#) [TL-5930/F](#)