

# Type MRCBM-2PX Manual Reset Circuit Breaker Automotive Type III Maxi Automotive Blade Type



www.optifuse.com (619) 593-5050

### Applications:

Battery charges, trucks, busses, RV's, trolling motors, etc.

### Specifications:

**Circuit Breaker Type** – Maxi Auto Blade Type, Manual Reset (Type III)

**Voltage:** 28 VDC

**Amperage:** 6A, 8A, 10A, 15A, 20A, 25A, 30A, 35A, 40A, 50A

**Body:** Grey Thermoplastic UL-Rated 94-V0

**Terminals:** Brass tin-plated

**Operating Temperature:** -40° F (-29° C) ~ 185° F (85° C)

**Storage Temperature:** -40° F (-29° C) ~ 260° F (125° C)


### Interrupt Rating:

- 100A @ 28 VDC (6A ~ 10A)
- 150A @ 28 VDC (15A)
- 200A @ 28 VDC (20A)
- 300A @ 28 VDC (25A ~ 30A)
- 400A @ 28 VDC (35A ~ 40A)
- 500A @ 28 VDC (50A)


### Agency Standards and Listings:

Conforms to SAE J553 (Type II) standard


### Mechanical Dimensions: Inches [mm]

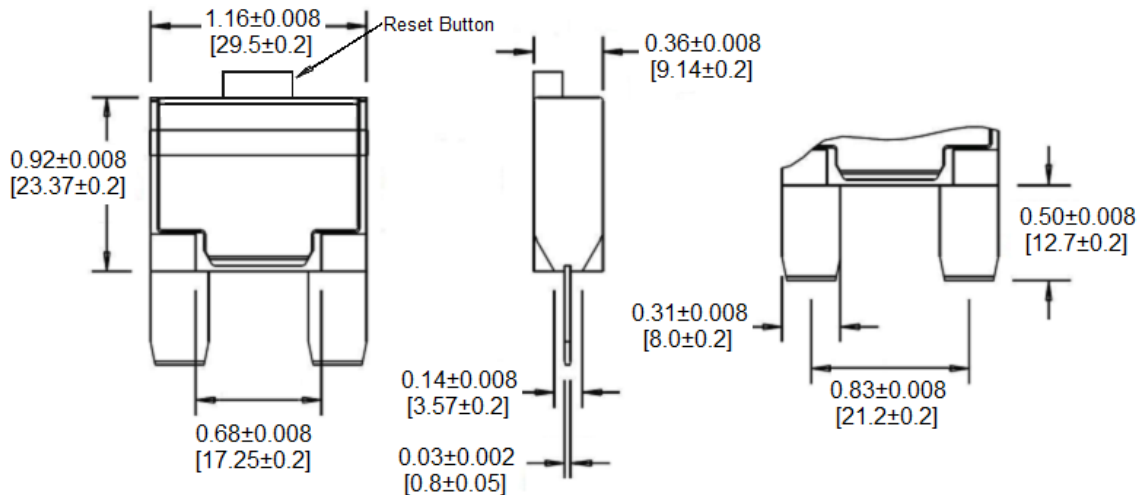

**Time Current Curve**

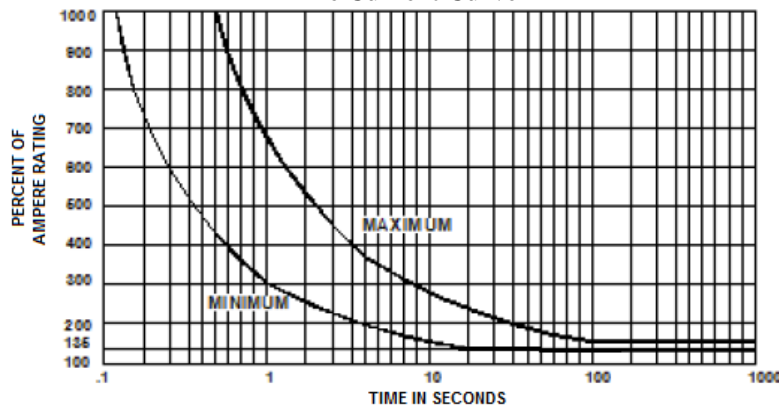

**Ambient Compensation Chart**

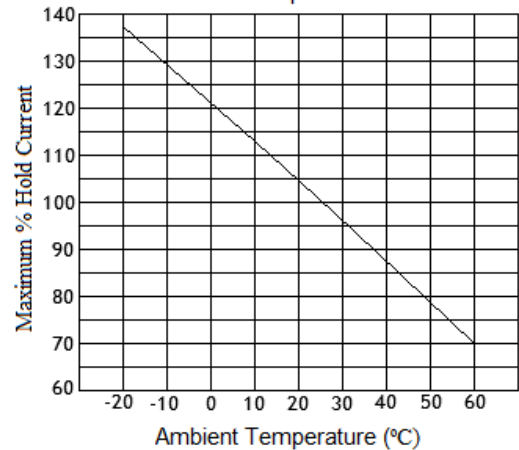

### Warning:



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

Note: All specifications subject to change without notice.

Rev B 04/2016 - Page: 1/1  
Code B01-01H

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Optifuse manufacturer](#):*

Other Similar products are found below :

[FSC-3.5A](#) [TSA-250MA](#) [BLR-304](#) [BLR-504](#) [BLC-05-GTA](#) [BLR-I-504](#) [BLM-304](#) [CBW57-EL4-10A](#) [FPK-10A](#) [FPK-1A](#) [FPK-30A](#) [LPM-08](#)  
[LPX-23B-08R-LOOP](#) [FPK-12A](#) [FPK-15A](#) [FPK-20A](#) [FPK-25A](#) [FPK-2A](#) [FPK-3A](#) [FPK-4A](#) [FPK-5A](#) [FPK-6A](#) [FPK-7A](#) [FPK-8A](#) [FPK-R-](#)  
[1.5A](#) [FPK-R-10A](#) [FPK-R-15A](#) [FPK-R-1A](#) [FPK-R-20A](#) [FPK-R-25A](#) [FPK-R-2A](#) [FPK-R-30A](#) [FPK-R-3A](#) [FPK-R-4A](#) [FPK-R-5A](#) [FPK-R-6A](#)  
[FPK-R-8A](#) [PMG-KB-01-Q2S](#) [LPM-01B-12R](#) [ACB-12-V-50A](#) [LPR-13C-10R](#) [ACBP4-PM-5A](#) [BLR-306](#) [ACB-12-V-30A](#) [CBW57-EL4-5A](#)  
[CBW57-ES-5A](#) [CBW57-PB-10A-5X](#) [CBW57-PS-10A-5X](#) [CBW57-PS-3A-1X](#) [CBW28-1A](#)