



Stud Diode

Rectifier Diode

SKN 26

SKR 26

Features


- Reverse voltages up to 1600 V
- Hermetic metal case with glass insulator
- Threaded stud ISO M6 (SKR 26 also 10 - 32 UNF)
- SKN: anode to stud, SKR: cathode to stud

Typical Applications*

- All-purpose mean power rectifier diodes
- Cooling via metal plates or heatsinks
- Non-controllable and half-controllable rectifiers
- Free-wheeling diodes
- Recommended snubber network:
RC: 0,05 µF, 200 Ω ($P_R = 1 \text{ W}$),
 $R_P = 150 \text{ k}\Omega$ ($P_R = 4 \text{ W}$)

V_{RSM}	V_{RRM}	$I_{FRMS} = 40 \text{ A}$ (maximum value for continuous operation)	
V	V	$I_{FAV} = 25 \text{ A}$ (sin. 180 °; $T_c = 100 \text{ }^\circ\text{C}$)	
400	400	SKN 26/04	SKR 26/04
800	800	SKN 26/08	SKR 26/08
1200	1200	SKN 26/12	SKR 26/12
1400	1400	SKN 26/14	SKR 26/14
1600	1600	SKN 26/16	SKR 26/16

Symbol	Conditions	Values	Units
I_{FAV}	sin. 180; $T_c = 100 \text{ }^\circ\text{C}$	25	A
I_D	K 9; $T_a = 45 \text{ }^\circ\text{C}$; B2 / B6	20 / 29	A
	K 3; $T_a = 45 \text{ }^\circ\text{C}$; B2 / B6	35 / 50	A
I_{FSM}	$T_{vj} = 25 \text{ }^\circ\text{C}; 10 \text{ ms}$	375	A
	$T_{vj} = 180 \text{ }^\circ\text{C}; 10 \text{ ms}$	320	A
i^2t	$T_{vj} = 25 \text{ }^\circ\text{C}; 8,3 \dots 10 \text{ ms}$	700	A²s
	$T_{vj} = 180 \text{ }^\circ\text{C}; 8,3 \dots 10 \text{ ms}$	510	A²s
V_F	$T_{vj} = 25 \text{ }^\circ\text{C}; I_F = 60 \text{ A}$	max. 1,55	V
$V_{(TO)}$	$T_{vj} = 180 \text{ }^\circ\text{C}$	max. 0,85	V
r_T	$T_{vj} = 180 \text{ }^\circ\text{C}$	max. 11	mΩ
I_{RD}	$T_{vj} = 180 \text{ }^\circ\text{C}; V_{RD} = V_{RRM}$	max. 4	mA
Q_{rr}	$T_{vj} = 160 \text{ }^\circ\text{C}; -di_F/dt = 10 \text{ A}/\mu\text{s}$	20	µC
$R_{th(j-c)}$		2	K/W
$R_{th(c-s)}$		1	K/W
T_{vj}		- 40 ... + 180	°C
T_{stg}		- 55 ... + 180	°C
V_{isol}		-	V~
M_s	to heatsink	2,0	Nm
a		5 * 9,81	m/s²
m	approx.	7	g
Case		E 8	



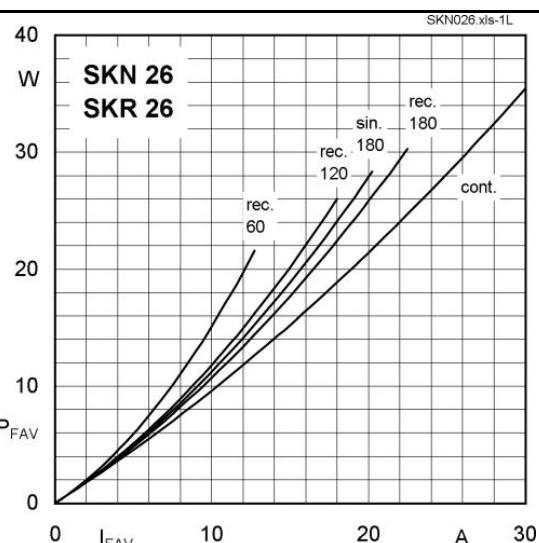


Fig. 1L Power dissipation vs. forward current

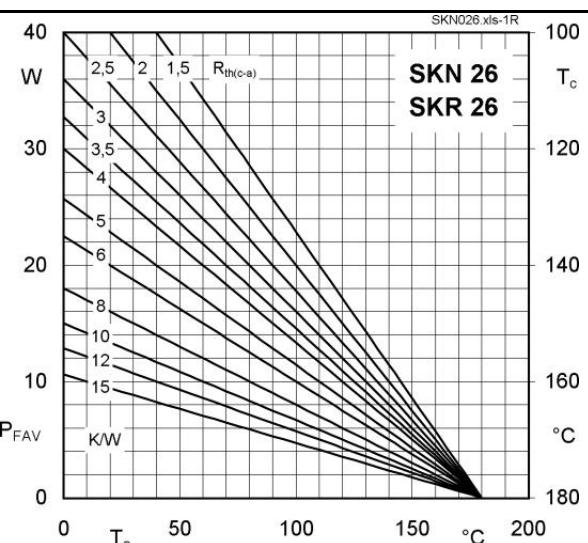


Fig. 1R Power dissipation vs. ambient temperature

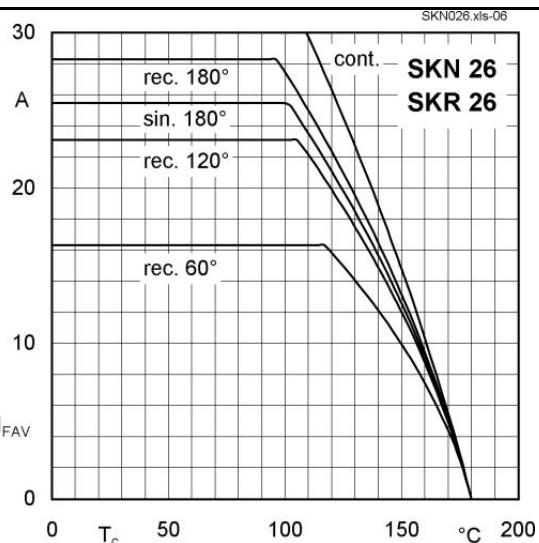


Fig. 2 Forward current vs. case temperature

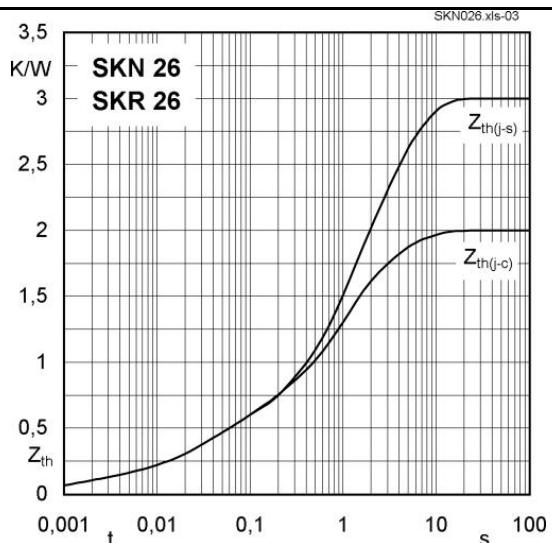


Fig. 4 Transient thermal impedance vs. time

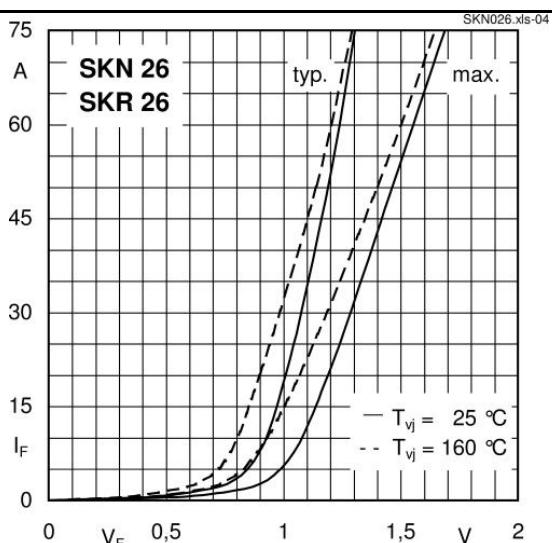


Fig. 5 Forward characteristics


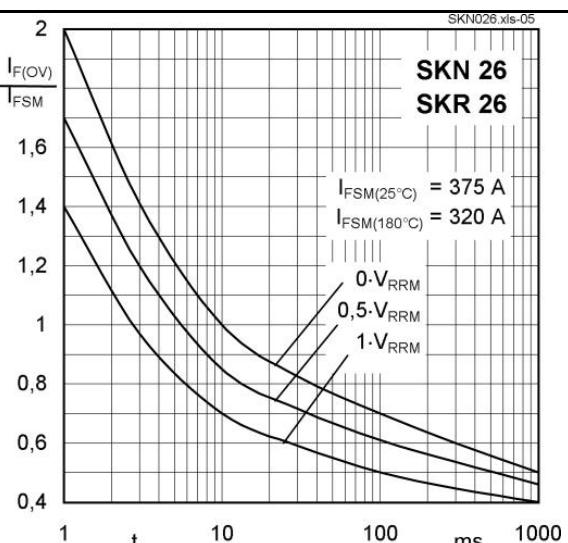


Fig. 6 Surge overload current vs. time

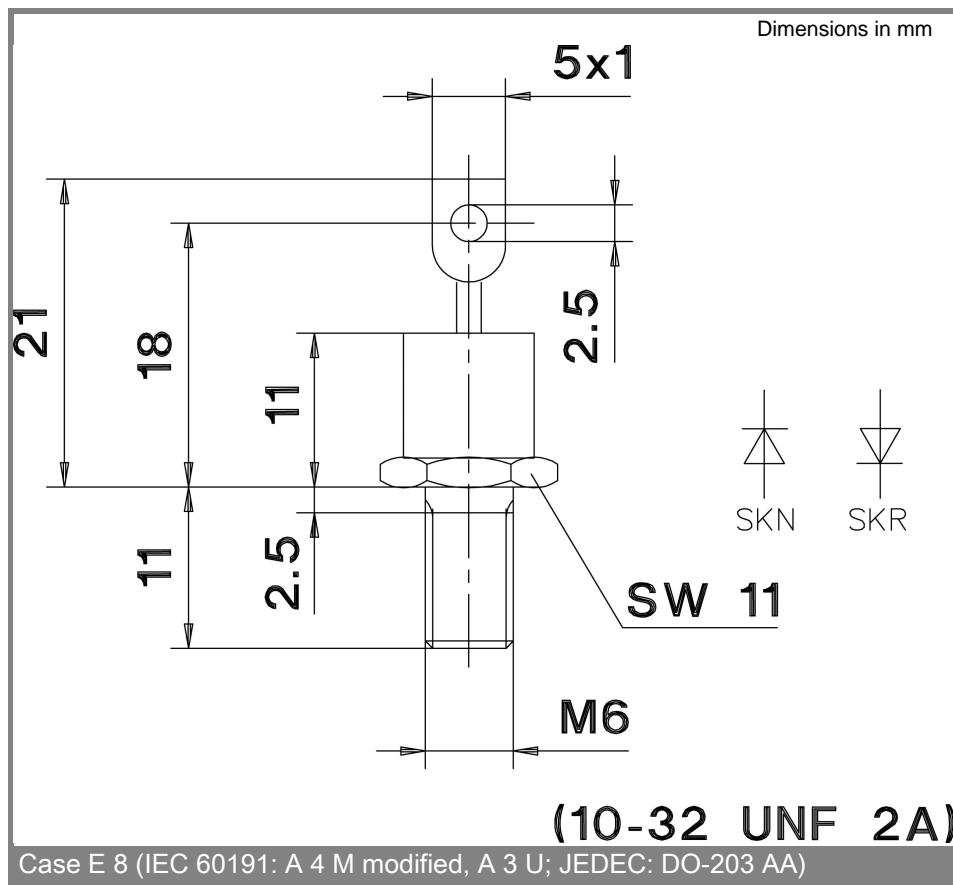

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [semikron manufacturer:](#)

Other Similar products are found below :

[SKD 60/12](#) [SKKT 42B12 E](#) [SKM200GB12T4](#) [SKR 130/14](#) [SKCH 40/16](#) [SKD 30/04A1](#) [SKKD 26/14](#) [SKKT 92/18E](#) [SKYPER 32 R](#) [SKKH 27/16E](#) [SKKD 380/16](#) [SKD 110/08](#) [SKD 62/12](#) [SKIIP 36NAB126V1 M20](#) [SKKD 162/20H4](#) [SKKD 380/08](#) [SKKH 72/20E H4](#) [SKKT 250/12E](#) [SKN71/02](#) [SKN 100/12](#) [SKN 100/14](#) [SKR 100/08](#) [SKIIP 24AC12T4V1 M20](#) [SKIIP 28AHB16V1 M20](#) [SKIIP 35NAB126V10 M20](#) [SKKH 570/16E](#) [SKKE 380/16](#) [SKR 130/18](#) [SK 45 UT 16](#) [SKKT 570/18E](#) [SKN 130/14](#) [SKPC200-240](#) [SKPC100Z-440](#) [SK 100 WT 12](#) [SK 25 UT 12](#) [SKR70/04](#) [SKD35/16](#) [SKKT 42/08E](#) [SKCH 40/08](#) [SKD 62/18](#) [SKD 82/08](#) [SKIIP 23NAB126V1 M20](#) [SKKQ 1200/14E](#) [SKR 60F12](#) [SKR 100/04](#) [SKR 100/14](#) [SKIIP 37AC12T4V1 M20](#) [SKD 60/16](#) [SKD 62/08](#) [SKDT 60/12](#)