

# SKKD 40F, SKMD 40F



**SEMIPACK® 1**

## Fast Diode Modules

**SKKD 40F**

**SKMD 40F**

### Features


- Heat transfer through ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- SKKD half bridge connection; SKMD centre tap connection, common cathode
- UL recognized, file no. E 63 532

### Typical Applications\*

- Self-commutated inverters
- DC choppers
- AC motor speed control
- Inductive heating
- Uninterruptible power supplies
- Electronic welders
- General power switching application






| $V_{RSM}$<br>V | $V_{RRM}$<br>V | $I_{FRMS} = 110$ A (maximum value for continuous operation)<br>$I_{FAV} = 40$ A (sin. 180°; 50Hz; $T_c = 80$ °C) |            |
|----------------|----------------|--|------------|
| 400            | 400            | SKKD 40F04   | SKMD 40F04 |
| 600            | 600            | SKKD 40F06   | SKMD 40F06 |
| 800            | 800            | SKKD 40F08   | SKMD 40F08 |
| 1000           | 1000           | SKKD 40F10   | SKMD 40F10 |

| Symbol        | Conditions                            | Values         | Units            |
|---------------|---------------------------------------|----------------|------------------|
| $I_{FAV}$     | sin. 180; $T_c = 85$ (100) °C         | 37 (25)        | A                |
| $I_{FSM}$     | $T_{vj} = 25$ °C; 10 ms               | 1100           | A                |
|               | $T_{vj} = 125$ °C; 10 ms              | 940            | A                |
| $i^2t$        | $T_{vj} = 25$ °C; 8,3 ... 10 ms       | 6000           | A <sup>2</sup> s |
|               | $T_{vj} = 125$ °C; 8,3 ... 10 ms      | 4400           | A <sup>2</sup> s |
| $V_F$         | $T_{vj} = 25$ °C; $I_F = 150$ A       | max. 2         | V                |
| $V_{(TO)}$    | $T_{vj} = 125$ °C                     | max. 1,2       | V                |
| $r_T$         | $T_{vj} = 125$ °C                     | max. 4         | mΩ               |
| $I_{RD}$      | $T_{vj} = 25$ °C; $V_{RD} = V_{RRM}$  | max. 0,5       | mA               |
| $I_{RD}$      | $T_{vj} = 125$ °C; $V_{RD} = V_{RRM}$ | max. 50        | mA               |
| $Q_{rr}$      | $T_{vj} = 125$ °C; $I_F = 100$ A,     | 3              | μC               |
| $I_{RM}$      | $-di/dt = 30$ A/μs, $V_R = 30$ V      | 10             | A                |
| $t_{rr}$      |                                       | 600            | ns               |
| $E_{rr}$      |                                       | 0,05           | mJ               |
| $R_{th(j-c)}$ | per diode / per module                | 0,7 / 0,35     | K/W              |
| $R_{th(c-s)}$ | per diode / per module                | 0,2 / 0,1      | K/W              |
| $T_{vj}$      |                                       | - 40 ... + 125 | °C               |
| $T_{stg}$     |                                       | - 40 ... + 125 | °C               |
| $V_{isol}$    | a. c. 50 Hz; r.m.s.; 1 s / 1 min.     | 3600 / 3000    | V~               |
| $M_s$         | to heatsink                           | 5 ± 15 %       | Nm               |
| $M_t$         | to terminals                          | 3 ± 15%        | Nm               |
| $a$           |                                       | 5 * 9,81       | m/s <sup>2</sup> |
| $m$           | approx.                               | 120            | g                |
| Case          | SKKD                                  | A 10           |                  |
|               | SKMD                                  | A 11           |                  |

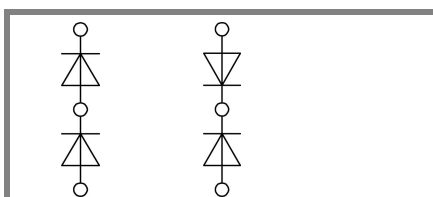


SKKD

SKMD

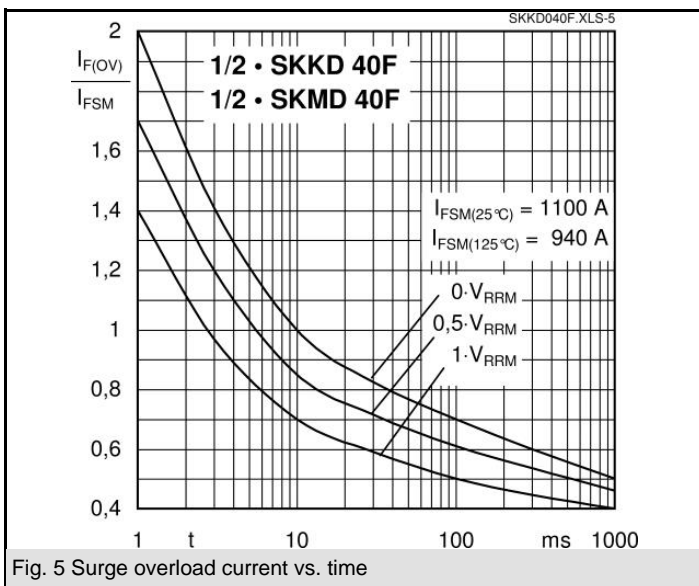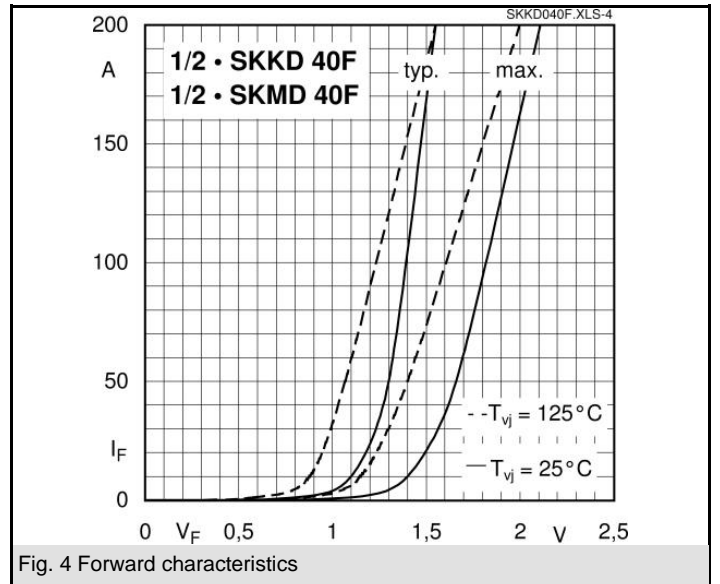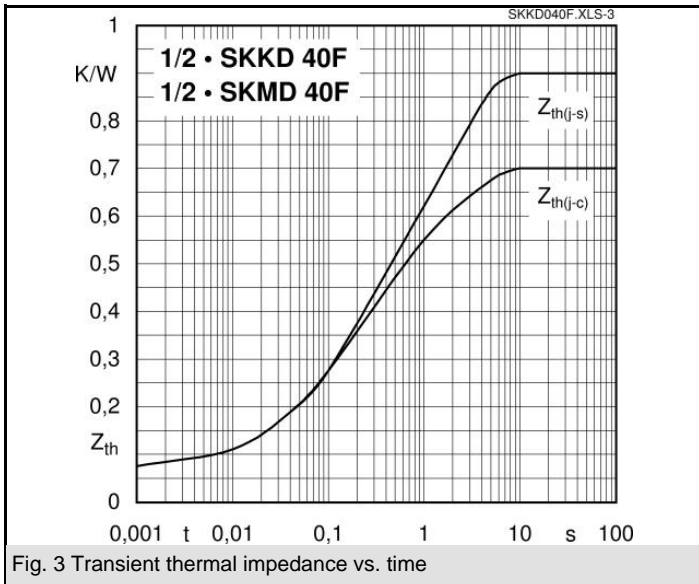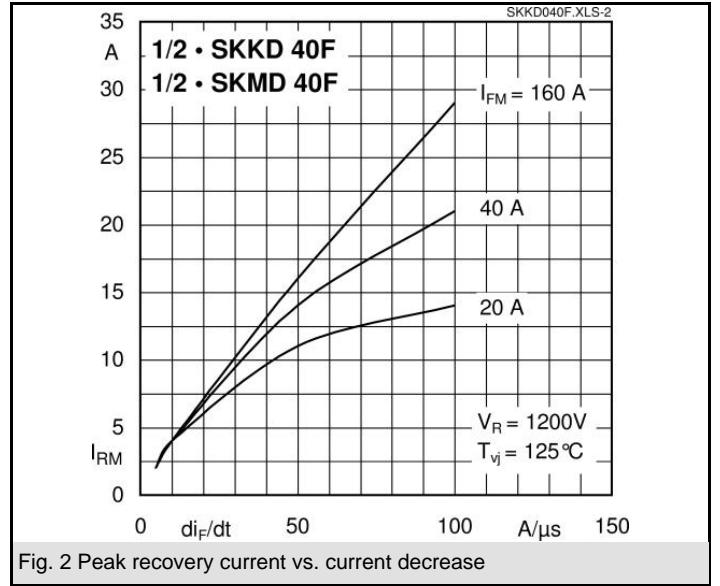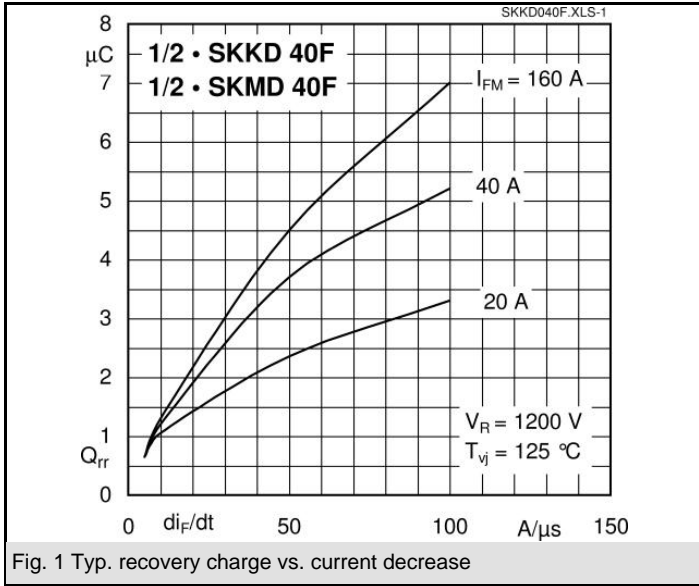

# SKKD 40F, SKMD 40F

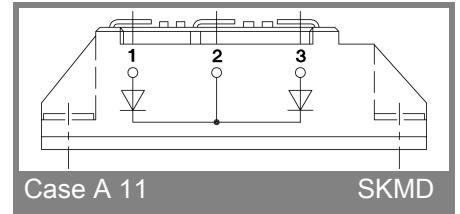

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [semikron](#) manufacturer:*

Other Similar products are found below :

[SKD 60/12](#) [SKKT 42B12 E](#) [SKM200GB12T4](#) [SKR 130/14](#) [SKCH 40/16](#) [SKKT 92/18E](#) [SKYPER 32 R](#) [SKKH 27/16E](#) [SKKD 380/16](#) [SKD 110/08](#) [SKD 62/12](#) [SKIIP 36NAB126V1 M20](#) [SKKD 162/20H4](#) [SKKD 380/08](#) [SKKH 72/20E H4](#) [SKKT 250/12E](#) [SKN71/02](#) [SKN 100/12](#) [SKN 100/14](#) [SKR 100/08](#) [SKIIP 24AC12T4V1 M20](#) [SKIIP 28AHB16V1 M20](#) [SKIIP 35NAB126V10 M20](#) [SKKH 570/16E](#) [SKKE 380/16](#) [SKR 130/18](#) [SKKD 26/14](#) [SKKT 570/18E](#) [SKN 130/14](#) [SKPC200-240](#) [SKPC100Z-440](#) [SK 100 WT 12](#) [SK 25 UT 12](#) [SKR70/04](#) [SKD35/16](#) [SKKT 42/08E](#) [SKCH 40/08](#) [SKD 62/18](#) [SKD 82/08](#) [SKIIP 23NAB126V1 M20](#) [SKKQ 1200/14E](#) [SKR 60F12](#) [SKR 100/04](#) [SKR 100/14](#) [SKIIP 37AC12T4V1 M20](#) [SKD 60/16](#) [SKD 62/08](#) [SKDT 60/12](#) [SKKT 106B16 E](#) [SKKD 60F17](#)