


PANEL SEALED PER MIL-PRF-83731

2-Position, 4 Pole

Basic Switches: Per MIL-PRF-8805/101
Enclosure: Sealed per MIL-DTL-83731
Rating: 5 amps Resistive @ 28VDC
 2 amps Inductive @ 28VDC
Action: Maintained
Handle: Stainless steel with black chrome
Housing: Thermoplastic
Lever: Stainless steel with black chrome
U2-583 (incorporating two T1 toggles)



3-Position, 4 Pole with Phosphorescent Dot

Basic Switches: Per MIL-PRF-8805/109-04 except terminals
Toggle: Sealed per MIL-DTL-83731
Rating: 1 amp Resistive @ 28VDC
 .5 amp Inductive @ 28VDC
Operating Force: 1 to 6 lbs.
Action: Maintained
Cap/Handle: Stainless steel, painted
Housing: Polyester
Bushing: Stainless steel, black oxide finish



T1 Toggle with IWTS Termination

Choose an integrated wire termination system (IWTS) for ease of installation. By using a special tool, there is no need to solder. Select from a variety of bat handles. T1 base shown here.



2-Position, 8 Pole, Lever Lock

Basic Switches: Per MIL-PRF-8805/101
Enclosure: Sealed per MIL-DTL-83731
Operating Force: 6.0 lbs. max
Rating: 5 amps Resistive @ 28VDC
 1 amp Inductive @ 28VDC
 1 amp Lamp @ 28VDC
 2 amps Motor @ 28VDC
Action: Maintained
Cap, Handle: Brass, dull nickel plate
Handle: Stainless steel
T1-0436*



*Available with lever lock configuration G only.

3-Position, 8 Pole

Rating: 5 amps Resistive @ 28VDC
 2 amps Inductive @ 28VDC
Action: Maintained
Cap: Brass, dull nickel plate
Handle: Stainless steel, dull nickel plate
Housing: Thermoplastic
Bushing: In accordance with MIL-DTL-3950
T1-0423



2-Position, 3 Pole, Lever Lock

Basic Switches: Per MIL-PRF-8805/101
Enclosure: Toggle seal per MIL-DTL-83731
Operating Force: 5.0 lbs. max
Rating: 150mA Resistive @ 28VDC
Mechanical Life: 100,000 cycles
Action: Maintained-maintained
Handle: Stainless steel, dull nickel plate
Cap, Handle: Brass, dull nickel plate
Bushing & Bracket: Stainless steel
T1-0081D*



*Lever Lock configurations D, F and G available.

2-Position, 2 Pole

Basic Switch: Per MIL-PRF-8805/109 (except terminals)
Enclosure: Sealed per MIL-DTL-83731
Operating Force: 2 to 5 lbs. max
Rating: 1 amp Resistive @ 28VDC
 0.5 amp Inductive @ 28VDC
Action: Maintained-maintained
Bat, Handle, Bushing & Bracket: Stainless steel
T1-0051-1



3-Position, 8 Pole, "T" Lever Lock

Basic Switch: Per MIL-PRF-8805
Enclosure: Sealed per MIL-DTL-83731
Rating: 5 amps Resistive @ 28VDC
 1 amp Inductive @ 28VDC
 1 amp Lamp @ 28VDC
 2 amps Motor @ 28VDC
Action: Maintained
Bushing, Cap & Handle: Stainless steel
T1-0215*




*Lever Lock configurations A thru P available.

Lever Lockout Configuration Codes

Figures A thru P are schematics to illustrate lockout configurations and momentary positions. They do not represent details of construction.

- A Locked in all three positions
- B Locked in Center and Keyway Side position
- D Locked out of Center position
- E Locked in Center position
- F Locked in Opposite Keyway position
- G Locked in Keyway Side position
- H Locked out of Center and Keyway Side Position
- J Locked out of Center and Opposite Keyway position
- K Locked in Center and Opposite Keyway position
- L Locked out of Keyway Side position
- M Locked out of and into Opposite Keyway position
- N Locked out of Opposite Keyway position
- P Locked out of and into Keyway Side position

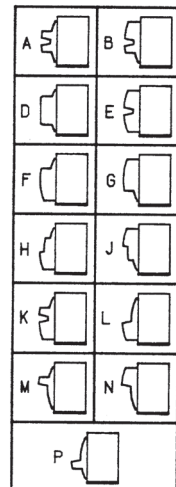

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Toggle Switches](#) category:

Click to view products by [OTTO](#) manufacturer:

Other Similar products are found below :

[8928K478](#) [8A1-C-222](#) [020017-13](#) [60012L](#) [6006L](#) [CS115W](#) [CS120W](#) [6663](#) [7101SPDV30BE](#) [7103SDV30BE](#) [7105D](#) [7108P3YAV2BE](#)
[71YY50282](#) [7300K36](#) [7301K38](#) [7306K36](#) [7310K36](#) [7506K4](#) [7592K6](#) [7660K12](#) [7691K14](#) [8391K108](#) [8396K108](#) [8812K14](#) [8824K14](#)
[8828K13](#) [8835K3](#) [8858K44](#) [PS83-121G](#) [1-1825192-0](#) [A201SCWZB04](#) [A207SYCB04](#) [A208J61ZQ0004](#) [A221T1TCQ](#) [A323S1CWZQ](#)
[A423S1CWZG-M8](#) [1201W](#) [12156AX408](#) [12147AGKX679](#) [12246X778](#) [12TW49-3D](#) [130312](#) [13037L](#) [13001X](#) [AE101MD1W4B04](#)
[AE208SD1W4B04](#) [MS24659-22D](#) [MS27407-5](#) [1520230-9](#) [1520231-1](#)