

## XDM3041 Bench-type Digital Multimeter




- + 4 inch 480 x 320 pixels high resolution LCD
- + resolutions up to 4 1/2 digits
- + reading rates up to 150 readings/s
- + true RMS AC voltage / current measurement
- + dual line display supported
- + the change trend analysis accessible via special chart mode
- + SCPI supported - remote control, and data-sharing possible via LAN, USB, RS232 port, and WiFi\*
- \* WiFi module is optional
- + multi- IO interface: USB Device / Host, RS232, LAN, and ext. trigger input

### Data-logger Mode

during recording the measurement value, possible to set the logging duration (min. 5ms), and length, then get access to chart or table result

● Trigger			Record
No.	Function	Reading	Memory
0	ACV	019.18 mV	Internal
1	ACV	027.75 mV	Display
2	ACV	019.22 mV	Table
3	ACV	019.28 mV	
4	ACV	025.39 mV	
5	ACV	027.48 mV	
6	ACV	027.33 mV	
7	ACV	004.52 mV	Read
8	ACV	003.62 mV	
<b>005.48 mVAC</b>		Manual 200 mV	Back

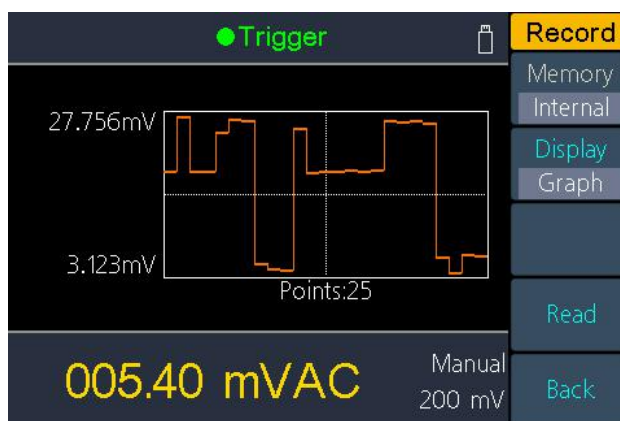

### + Performance Specifications

XDM3041	Measurement Range	Frequency Range	Accuracy: 1 Year ± (% of reading + % of range)
<b>DC Voltage</b>	600mV, 6V, 60V, 600V, 1000V	/	0.02±0.01
<b>True RMS AC Voltage</b>	600mV, 6V, 60V, 600V, 750V	20 Hz - 50 Hz	2 + 0.10
		50 Hz - 20 kHz	0.2 + 0.06
		20 kHz - 50 kHz	1.0 + 0.05
		50 kHz - 100 kHz	3.0 + 0.08
<b>DC Current</b>	600.00 μA	/	0.06 + 0.02
	6.0000 mA		0.06 + 0.02
	60.000 mA		0.1 + 0.05
	600.00 mA		0.2 + 0.02
	6.000 A		0.2 + 0.05
	10.0000 A		0.250 + 0.05
<b>True RMS AC Current</b>	60.000 mA, 600.00 mA, 6.0000 A, 10.000 A	20 Hz - 45 Hz	2 + 0.10
		45 Hz - 2 kHz	0.50 + 0.10
		2 kHz - 10 kHz	2.50 + 0.20

<b>Resistance</b>	600.00 Ω	/	0.040 + 0.01
	6.0000 kΩ		0.030 + 0.01
	60.000 kΩ		0.030 + 0.01
	600.00 kΩ		0.040 + 0.01
	6.0000 MΩ		0.120 + 0.03
	60.000 MΩ		0.90 + 0.03
	100.00 MΩ		1.75 + 0.03
<b>Diode Test</b>	3.0000 V	/	0.5 + 0.01
<b>Continuity</b>	1000 Ω	/	0.5 + 0.01
<b>Frequency Period</b>	600 mV - 750 V	20 Hz - 2 kHz	0.01 + 0.003
		2 kHz - 20 kHz	0.01 + 0.003
		20 kHz - 200 kHz	0.01 + 0.003
		200 kHz - 1 MHz	0.01 + 0.006
	60 mA - 10 A	20 Hz - 2 kHz	0.01 + 0.003
		2 kHz - 10 kHz	0.01 + 0.003
		<b>Test Current</b>	
<b>Capacitance</b>	2.000 nF	200 nA	3 + 1.0
	20.00 nF	200 nA	1 + 0.5
	200.0 nF	2 μA	1 + 0.5
	2.000 μF	10 μA	1 + 0.5
	200 μF	100 μA	1 + 0.5
	10000 μF	1 mA	2 + 0.5
<b>Temperature</b>	temperature sensors under 2 categories supported - thermocouple (ITS-90 conversion between B / E / J / K / N / R / S / T type), and thermal resistance (RTD sensor conversion between Pt100 and Pt385 type)		
<b>Other functions</b>	Bar meter, histogram, trend chart, Max. Min. value, average value, standard deviation, DB / DBm, Pass / Fail		
<b>Data-logger Function</b>			
<b>Logging Duration</b>	5ms - 1000s		
<b>Logging Length</b>	1M points		
<b>General</b>			
<b>Dimension (W x H x D)</b>	235 x 110 x 295 (mm)		
<b>Weight (without package)</b>	3.0 kg		


Specifications subject to change without prior notice.

#### + Accessories

The accessories subject to final delivery.



Power Cord



Manual




USB



Fuse



Multimeter Lead



Alligator Clip

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Digital Multimeters](#) category:*

*Click to view products by [OWON](#) manufacturer:*

Other Similar products are found below :

[6111-517](#) [FS881](#) [40705X](#) [C.A 6133 LAUNCH KIT P 1020 A](#) [SEFRAM7303](#) [BS K-CLIP 19290](#) [DM285-FLEX-KIT](#) [IBT6K](#) [GDM-531](#)  
[GDM-532](#) [GDM-533](#) [GDM-541](#) [1013-099](#) [1000-219](#) [1001-613](#) [1006-969](#) [1008-221](#) [1012-597](#) [30XR](#) [34XR](#) [35XP](#) [TESTO 745](#) [0590 7450](#)  
[TESTO 760-2](#) [0590 7602](#) [TESTO 760-3](#) [0590 7603](#) [440012](#) [AX-155](#) [AX-174](#) [AX-178](#) [AX-18B](#) [AX-190A](#) [AX-503](#) [AX-507B](#) [AX-594](#) [AX-](#)  
[LCR42A](#) [AX-MS811](#) [AX-MS8250](#) [AX-PDM01](#) [AX-T520](#) [AX-T901](#) [AX-T903](#) [BAT-250-EUR](#) [BM525S](#) [BM805S](#) [BM807S](#) [BM817S](#)  
[BM827S](#) [BM829S](#) [BM857S](#)