

APPLIANCE COUPLERS



Appliance Outlet

Type BTSC13L/1

Snap-in mounting from front

Solder terminal or quick connect from single terminal

Protection Class 1

Integral plug retention feature



Technical Data

- Rated current/voltage 10A /250 VAC
- Insulation resistance
 - 10MΩ (500 VDC, 1 Min.)
- Dielectric Strength: 2KV (50 Hz, 1 Min.) to accessible surfaces
- Material: Socket – Thermoplastic, black, UL94V-0

Standards


IEC/EN 60320-2-2/F

Approvals

ENEC (10 A/250VAC)

ETLus (15 A/250VAC)

Dimensional Data & Panel Preparation

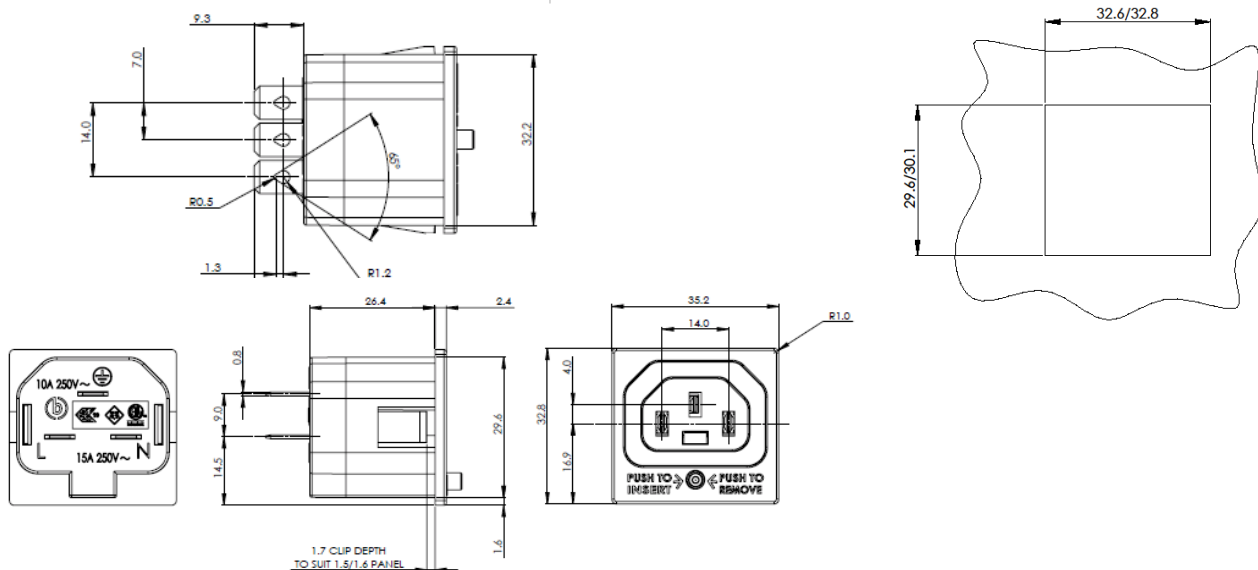

Part Ref	Description
BTSC13L/1B	Black IEC320 Snap in 1.5mm Panel Thickness
BTSC13L/1W	White IEC320 Snap in 1.5mm Panel Thickness

Terminal Type
Quick Connect/Solder 6.3 x 0.8 mm
Quick Connect/Solder 6.3 x 0.8 mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [burland](#) manufacturer:

Other Similar products are found below :

[Burland](#)