



# MMBT2907A-AU

## PNP GENERAL PURPOSE SWITCHING TRANSISTOR

**VOLTAGE** 60 Volt **POWER** 225 mWatt



**SOT-23** Unit : inch(mm)

### FEATURES

- PNP epitaxial silicon, planar design
- Collector-emitter voltage  $V_{CE} = -60V$
- Collector current  $I_C = -600mA$
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

### MECHANICAL DATA

Case: SOT-23  
 Terminals: Solderable per MIL-STD-750, Method 2026  
 Approx. Weight: 0.0003 ounces, 0.0084 grams  
 Device Marking: M7A

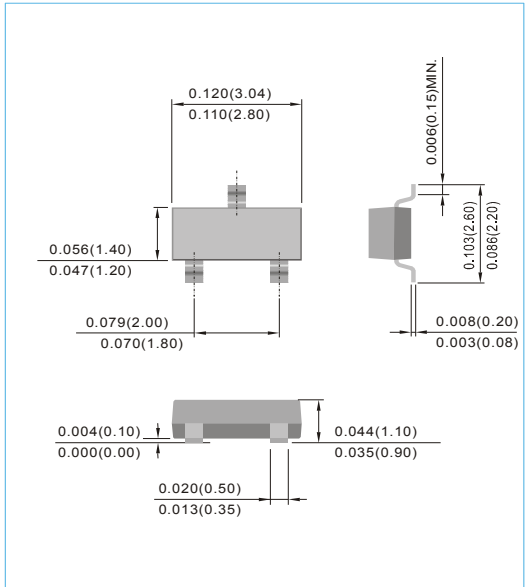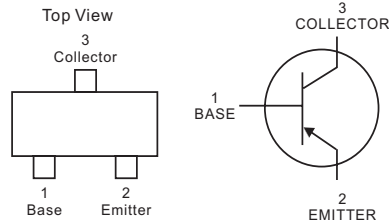

### ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Units
Collector-Emitter Voltage	$V_{CEO}$	-60	V
Collector-Base Voltage	$V_{CBO}$	-60	V
Emitter-Base Voltage	$V_{EBO}$	-5.0	V
Collector Current-Continuous	$I_C$	-600	mA

### THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Units
Max Power Dissipation (Note 1)	$P_{TOT}$	225	mW
Storage Temperature	$T_{STG}$	-55 to 150	$^{\circ}C$
Junction Temperature	$T_J$	-55 to 150	$^{\circ}C$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	$^{\circ}C / W$

Note 1 : Transistor mounted on FR-4 board 70 x 60 x 1 mm.



# MMBT2907A-AU

## ELECTRICAL CHARACTERISTICS (T<sub>J</sub>=25°C, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Collector-Emitter Breakdown Voltage	V <sub>(BR)</sub> CEO	I <sub>C</sub> =-10mA, I <sub>B</sub> =0	-60	-	-	V
Collector-Base Breakdown Voltage	V <sub>(BR)</sub> CBO	I <sub>C</sub> =-10μA, I <sub>E</sub> =0	-60	-	-	V
Emitter-Base Breakdown Voltage	V <sub>(BR)</sub> EBO	I <sub>E</sub> =-10μA, I <sub>C</sub> =0	-5.0	-	-	V
Base Cutoff Current	I <sub>BL</sub>	V <sub>CE</sub> =-30V, V <sub>EB</sub> =-0.5V	-	-	-50	nA
Collector Cutoff Current	I <sub>CEX</sub>	V <sub>CE</sub> =-30V, V <sub>EB</sub> =-0.5V	-	-	-50	nA
	I <sub>CBO</sub>	V <sub>CE</sub> =-50V, I <sub>E</sub> =0	-	-	-10	nA
		V <sub>CE</sub> =-50V, I <sub>E</sub> =0 T <sub>J</sub> =125°C	-	-	-10	μA
DC Current Gain	h <sub>FE</sub>	I <sub>C</sub> =-0.1mA, V <sub>CE</sub> =-10V	75	-	-	-
		I <sub>C</sub> =-1.0mA, V <sub>CE</sub> =-10V	100	-	-	-
		I <sub>C</sub> =-10mA, V <sub>CE</sub> =-10V	100	-	-	-
		I <sub>C</sub> =-150mA, V <sub>CE</sub> =-10V	100	-	-	300
		I <sub>C</sub> =-500mA, V <sub>CE</sub> =-10V	50	-	-	-
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>C</sub> =-150mA, I <sub>B</sub> =-15mA	-	-	-0.4	V
		I <sub>C</sub> =-500mA, I <sub>B</sub> =-50mA	-	-	-1.6	V
Base-Emitter Saturation Voltage	V <sub>BE(SAT)</sub>	I <sub>C</sub> =-150mA, I <sub>B</sub> =-15mA	-	-	-1.3	V
		I <sub>C</sub> =-500mA, I <sub>B</sub> =-50mA	-	-	-2.6	V
Collector-Base Capacitance	C <sub>CBO</sub>	V <sub>CB</sub> =-10V, I <sub>E</sub> =0, f=1MHz	-	-	8.0	pF
Emitter-Base Capacitance	C <sub>EBO</sub>	V <sub>CB</sub> =-2V, I <sub>C</sub> =0, f=1MHz	-	-	30	pF
Current Gain-Bandwidth Product	F <sub>T</sub>	I <sub>C</sub> =-50mA, V <sub>CE</sub> =-20V, f=100MHz	200	-	-	MHz
Turn-On Time	t <sub>on</sub>	V <sub>CC</sub> =-30V, V <sub>BE</sub> =-0.5V, I <sub>C</sub> =-150mA, I <sub>B</sub> =-15mA	-	-	45	ns
Delay Time	t <sub>d</sub>	V <sub>CC</sub> =-30V, V <sub>BE</sub> =-0.5V, I <sub>C</sub> =-150mA, I <sub>B</sub> =-15mA	-	-	10	ns
Rise Time	t <sub>r</sub>	V <sub>CC</sub> =-30V, V <sub>BE</sub> =-0.5V, I <sub>C</sub> =-150mA, I <sub>B</sub> =-15mA	-	-	40	ns
Turn-Off Time	t <sub>off</sub>	V <sub>CC</sub> =-6V, I <sub>C</sub> =-150mA, I <sub>B1</sub> =I <sub>B2</sub> =-15mA	-	-	100	ns
Storage Time	t <sub>s</sub>	V <sub>CC</sub> =-6V, I <sub>C</sub> =-150mA, I <sub>B1</sub> =I <sub>B2</sub> =-15mA	-	-	80	ns
Fall Time	t <sub>f</sub>	V <sub>CC</sub> =-6V, I <sub>C</sub> =-150mA, I <sub>B1</sub> =I <sub>B2</sub> =-15mA	-	-	30	ns



# MMBT2907A-AU

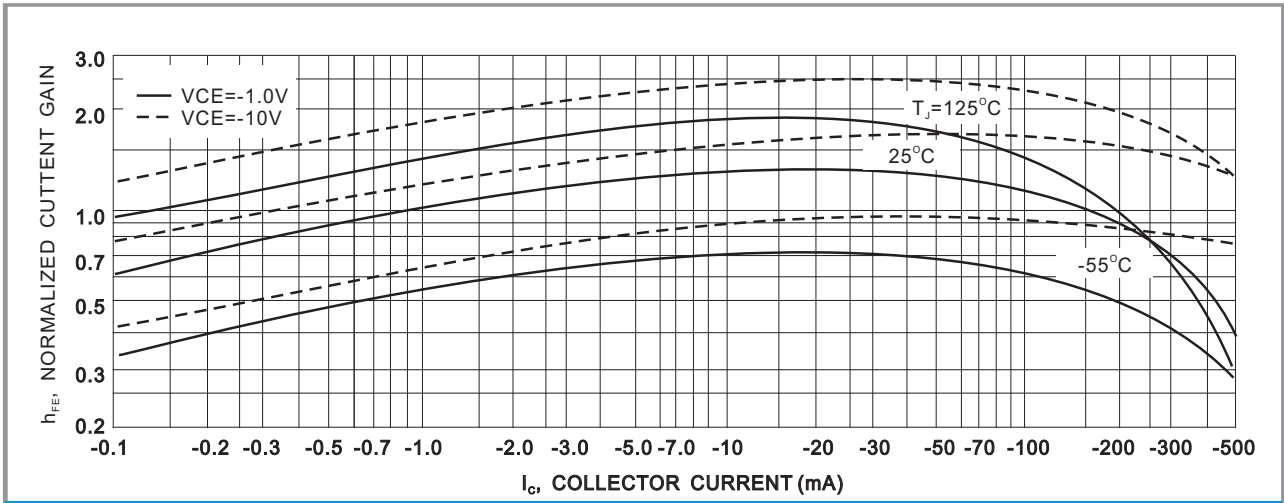


Fig.1-DC Current Gain

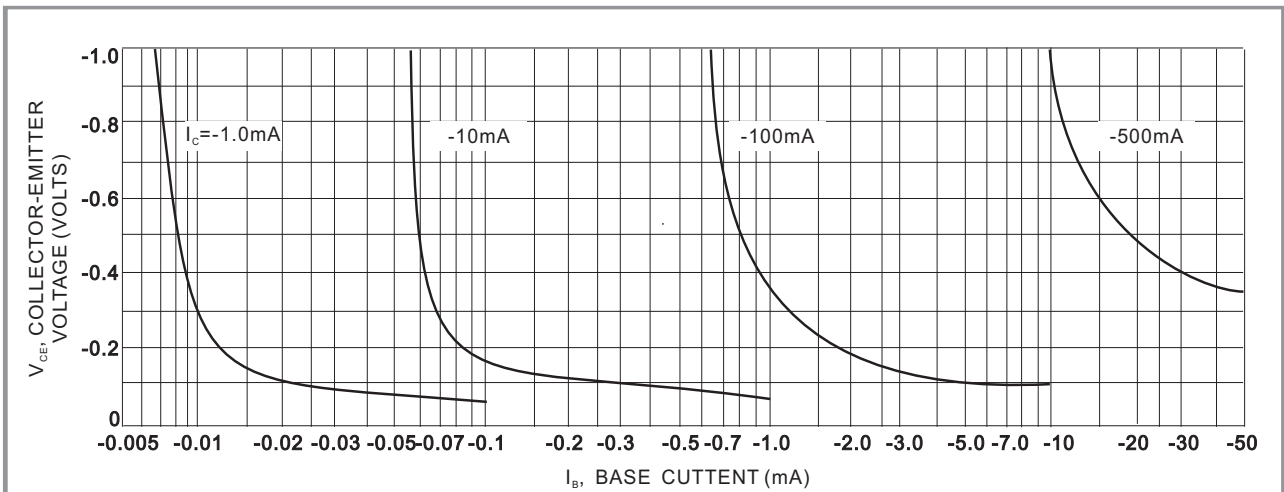


Fig.2-Collector Saturation Region

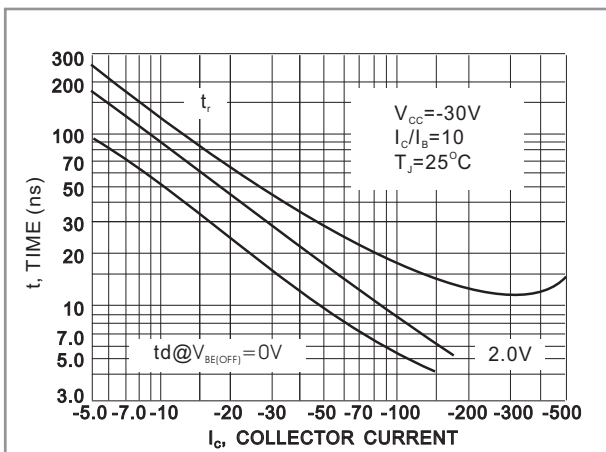


Fig.3-Turn-On Time

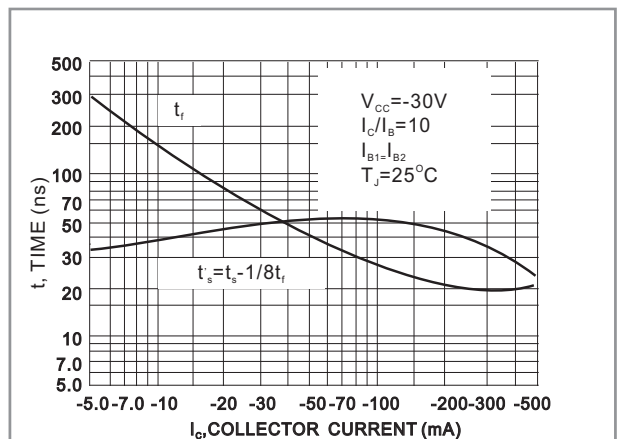


Fig.4-Turn-Off Time



# MMBT2907A-AU

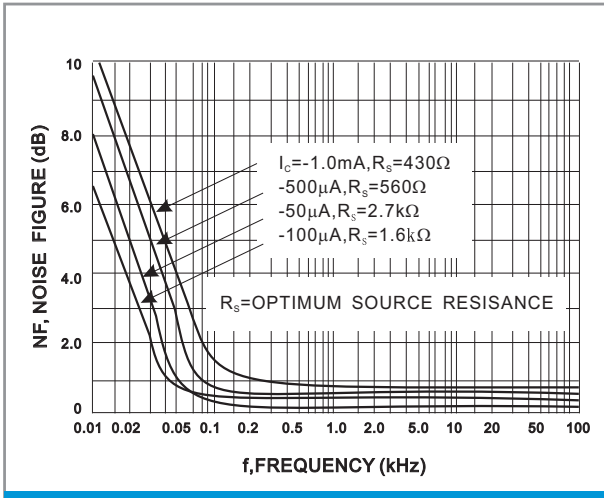


Fig.5-Frequency Effects

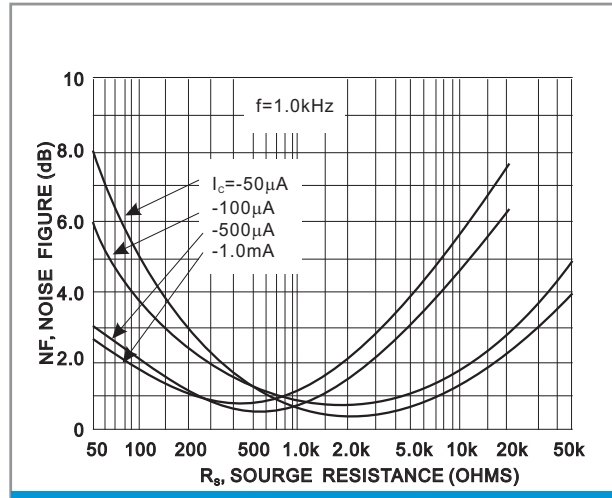


Fig.6-Source Resistance Effects

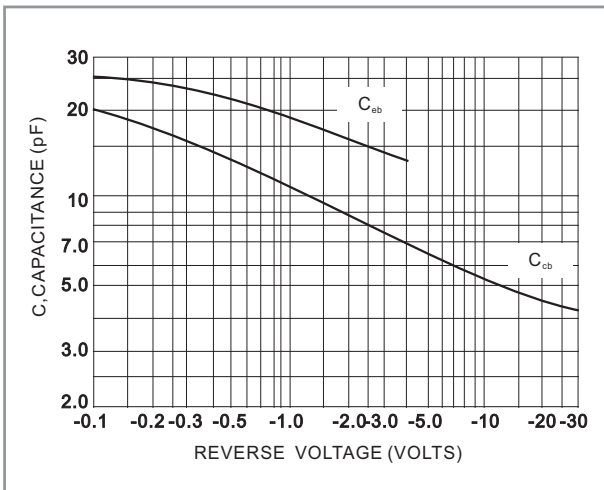


Fig.7-Capacitances

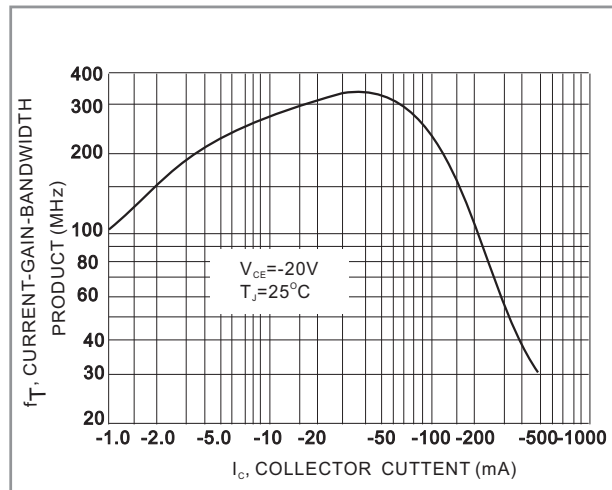


Fig.8-Current-Gain-Bandwidth Product

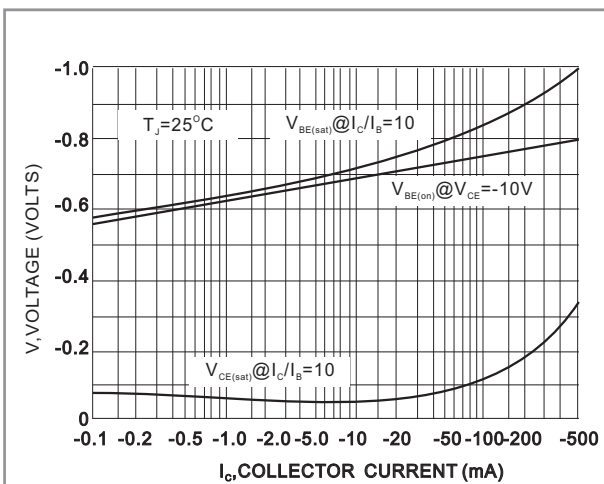


Fig.9-On Voltage


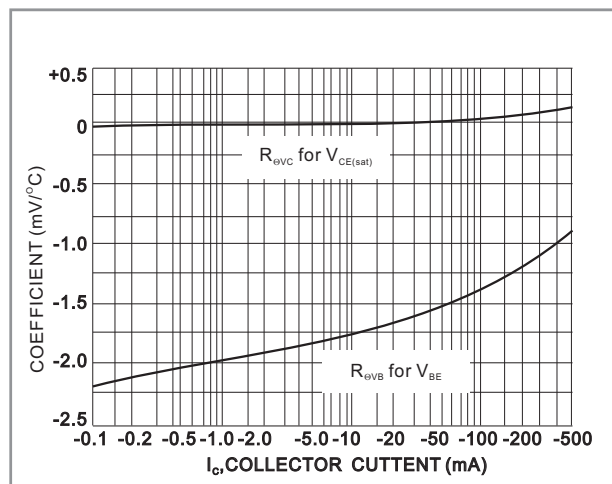


Fig.10-Temperature Coefficients



# MMBT2907A-AU

## MOUNTING PAD LAYOUT

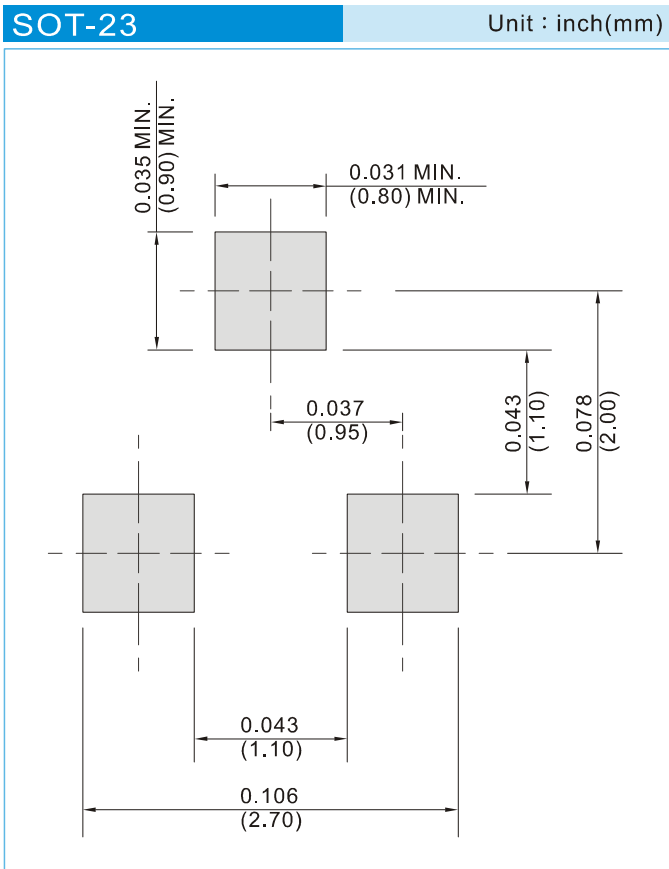

## ORDER INFORMATION

- Packing information  
T/R - 12K per 13" plastic Reel  
T/R - 3K per 7" plastic Reel



# MMBT2907A-AU

## Part No.\_packing code\_Version

MMBT2907A-AU\_R1\_000A2

MMBT2907A-AU\_R2\_000A2

For example :

**RB500V-40\_R2\_00001**



Packing Code <b>XX</b>				Version Code <b>XXXXX</b>		
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> ~5 <sup>th</sup> Code
Tape and Ammunition Box (T/B)	<b>A</b>	N/A	<b>0</b>	<b>HF</b>	<b>0</b>	serial number
Tape and Reel (T/R)	<b>R</b>	7"	<b>1</b>	<b>RoHS</b>	<b>1</b>	serial number
Bulk Packing (B/P)	<b>B</b>	13"	<b>2</b>			
Tube Packing (T/P)	<b>T</b>	26mm	<b>X</b>			
Tape and Reel (Right Oriented) (TRR)	<b>S</b>	52mm	<b>Y</b>			
Tape and Reel (Left Oriented) (TRL)	<b>L</b>	PANASERT T/B CATHODE UP (PBCU)	<b>U</b>			
FORMING	<b>F</b>	PANASERT T/B CATHODE DOWN (PBCD)	<b>D</b>			



## MMBT2907A-AU

---

### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [Panjit manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)  
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-](#)  
[TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)  
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)  
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)  
[MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#)