

REV	ECN	APP'D
Н	3963	JC 4/20/00
J	4127	

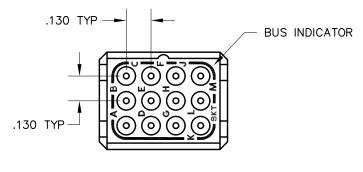

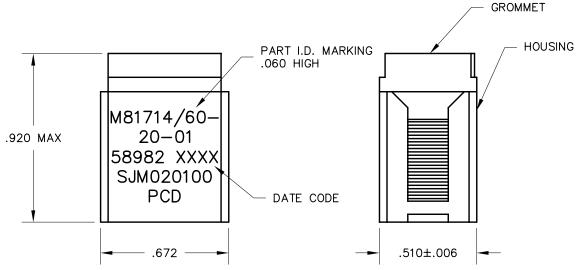

## NOTES:

1. MATERIALS:

BODY: POLYETHERIMIDE PER MIL-P-46184. GROMMET: SILICONE BLEND ELASTOMER. CONTACT RETAINERS: BERYLLIUM COPPER. INTERNAL PIN CONTACTS: COPPER ALLOY,

HARD GOLD PLATE PER MIL-G-45204.

2. PERFORMANCE SPECIFICATIONS:

TITI C

OPERATING TEMP: −65° TO 200°C INSULATION RESISTANCE: 5000 MEGOHMS MIN @ 25°C

DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS AT SEA LEVEL

AND 200 VRMS AT 110,000 FT. ALTITUDE.

CURRENT RATING: 7.5 AMPS.

VIBRATION AND SHOCK: PER MIL-T-81714,

PARAGRAPH 3.5.5 AND 3.5.8.

3. MODULE SUPPLIED WITH THIRTEEN (13) M39029/22-192 SOCKET CONTACTS AND TWO (2) MS27488-20 SEALING PLUGS.

DIMENSIONS ANSI Y14.5M	TOLERANCES .xx ±	PROJECTION	SPECIFICATION DRAWING		, ,	ocket juncti	ON MO	DULE
UNITS: INCHES ACAD FILE	.XXX ±.010 ANGLES ±2*		ENGR A. PATRIE 4/19/00	P	$\mathbf{\Omega}$	SIZE 20 - M81714/60	1-BU -20-0	_
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF PCD, INC. PEABODY, MA, USA		CHKD J. TON 4/24/00	SIZE	DWG NO. SJM020100			REV J
			J. CAHALY 4/25/00	COD	E: 5898	2 SCALE: 2:1	SHEET	1 OF 1

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Socket Junction Modules category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

00610700081 120-1833-000 SJG016100 SJG022171 SJG022200 SJM020601 SJM022101 107890-ZZ SJG020200 SJM022501 SJG020170 M81714/61-0Z SJG022271 SJM022701 BTJ116E02B-513 BTJ120E02C-513 SJM020301 SJM022601 SJG016270 SJG020271 00175110600 BTL-16-513 00111510102 BTM-16 SJM000800 BTM-22-513 BTL-16 00175110200 00170511156 00175110800 00175110700 BTM-22 00175110107 SJE020016 00175110507 00111510502 00175110300 00111510202 00175110207 00175110400 SJM012200 SJM022201 SJE020045 SJM016101 SJM016201 SJM020101 A85049124S25W A85049124S13W A85049124S17W A85049124S11W