



# SB2060LCT

## DUAL LOW VF SCHOTTKY RECTIFIER

**VOLTAGE** 60 Volts **CURRENT** 20 Amperes

### FEATURES

- Low forward voltage drop, low power losses
- High efficiency operation
- In compliance with EU RoHS 2002/95/EC directives

### MECHANICAL DATA


Case : TO-220AB, Plastic

Terminals : Solderable per MIL-STD-750, Method 2026

Weight: 0.0655 ounces, 1.859 grams

TO-220AB

Unit : inch(mm)

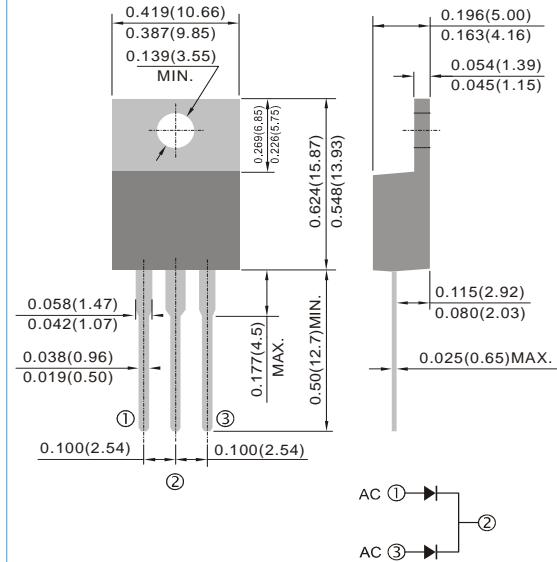

### MAXIMUM RATINGS(T<sub>A</sub>=25°C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	60	V
Maximum average forward rectified current (Fig.4)	I <sub>F(AV)</sub> per device per diode	20 10	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode	I <sub>FSM</sub> per diode	145	A
Typical thermal resistance	R <sub>θJC</sub>	2.5	°C / W
Operating junction	T <sub>J</sub>	-55 to + 125	°C
Storage temperature range	T <sub>STG</sub>	-55 to + 150	°C

### ELECTRICAL CHARACTERISTICS(T<sub>A</sub>=25°C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Breakdown voltage	V <sub>BR</sub>	I <sub>R</sub> =1mA	64	68	-	V
Instantaneous forward voltage per diode <sup>(1)</sup>	V <sub>F</sub>	I <sub>F</sub> =5A I <sub>F</sub> =10A T <sub>J</sub> =25°C	- -	0.44 0.51	0.51 0.60	V
		I <sub>F</sub> =5A I <sub>F</sub> =10A T <sub>J</sub> =125°C	- -	-	0.44 0.56	V
Reverse current per diode <sup>(2)</sup>	I <sub>R</sub>	V <sub>R</sub> =60V T <sub>J</sub> =25°C T <sub>J</sub> =100°C	- -	-	0.5 20	mA

Note.1.Pulse test : 380μs pulse width, 1% duty cycle

2.Pulse test : Pulse width ≤ 2.5ms



## SB2060LCT

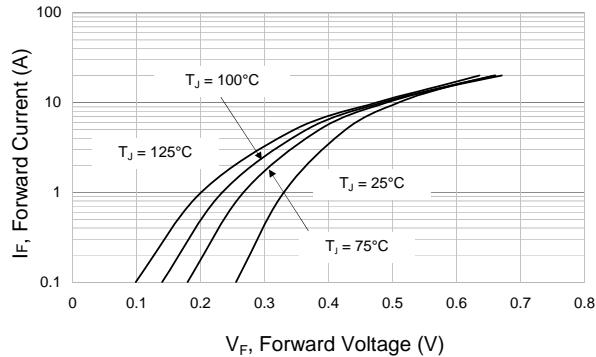


Fig.1 Typical Forward Characteristics Per Diode

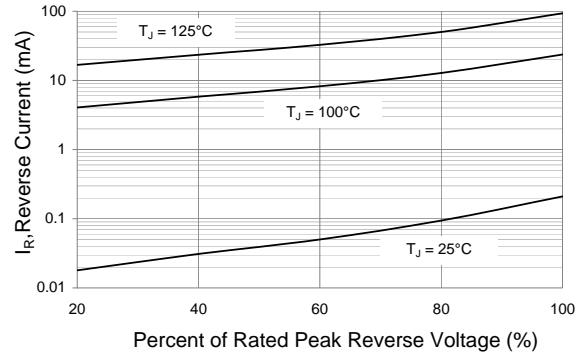


Fig.2 Typical Reverse Characteristics Per Diode

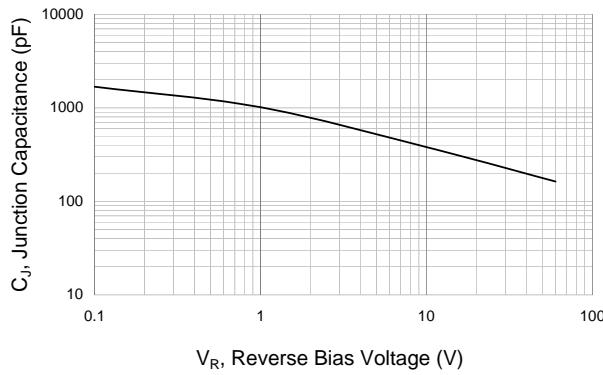


Fig.3 Typical Junction Capacitance Per Diode

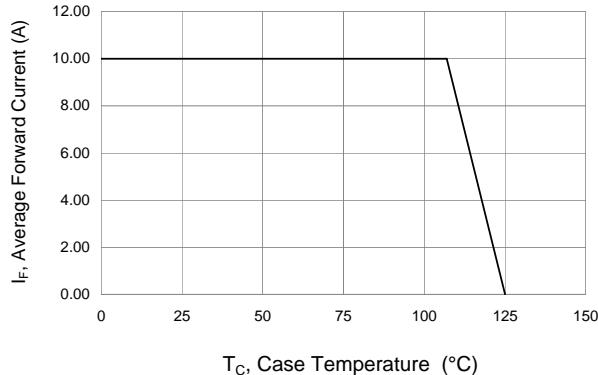


Fig.4 Forward Current Derating Curve Per Diode

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Schottky Diodes & Rectifiers category:***

***Click to view products by Panjit manufacturer:***

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)