


# BASIC Stamp<sup>®</sup> Module Comparison Chart

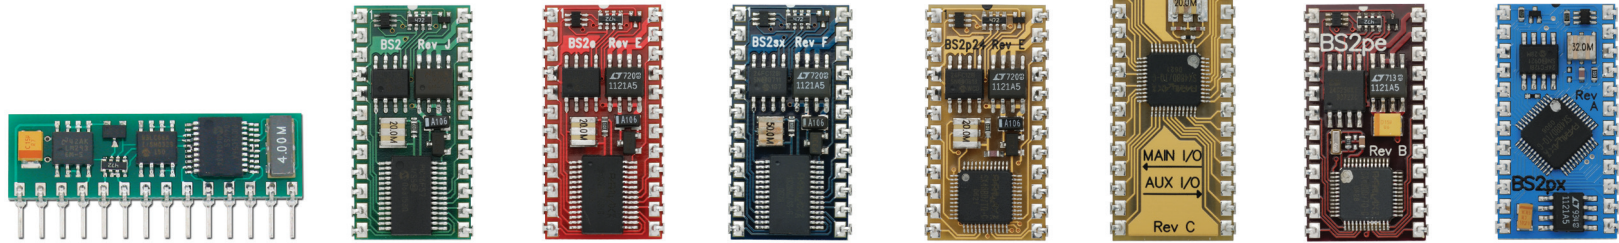

Name of module	BASIC Stamp 1	BASIC Stamp 2	BASIC Stamp 2e	BASIC Stamp 2sx	BASIC Stamp 2p24	BASIC Stamp 2p40	BASIC Stamp 2pe	BASIC Stamp 2px
Stock Code	BS1-IC	BS2-IC	BS2E-IC	BS2SX-IC	BS2P24	BS2P40	BS2PE	BS2PX24
Processor Speed	4 MHz	20 MHz	20 MHz	50 MHz	20 MHz Turbo	20 MHz Turbo	8 MHz Turbo	32 MHz Turbo
Execution Speed (instructions/ Sec.)	~2,000	~4,000	~4,000	~10,000	~12,000	~12,000	~6,000	~19,000
RAM Size	16 Bytes (2 I/O, 14 Variable)	32 Bytes (6 I/O, 26 Variable)	32 Bytes (6 I/O, 26 Variable)	32 Bytes (6 I/O, 26 Variable)	38 Bytes (12 I/O, 26 Variable)	38 Bytes (12 I/O, 26 Variable)	38 Bytes (12 I/O, 26 Variable)	38 Bytes (12 I/O, 26 Variable)
Scratchpad RAM	N/A	N/A	64 Bytes	64 Bytes	128 Bytes	128 Bytes	128 Bytes	128 Bytes
EEPROM (Program) Size	256 Bytes, ~80 instructions	2K Bytes, ~500 instructions	8 x 2K Bytes, ~4,000 instructions	8 x 2K Bytes, ~4,000 instructions	8 x 2K Bytes, ~4,000 instructions	8 x 2K Bytes, ~4,000 instructions	16 x 2K Bytes (16K for source), ~4,000 instructions	8 x 2K Bytes (16K for source), ~4,000 instructions
Voltage Requirements	5-15 VDC	5-15 VDC	5-12 VDC	5-12 VDC	5-12 VDC	5-12 VDC	5-12 VDC	5-12 VDC
Current Draw @ 5 V (Run/Sleep)	1 mA/25 µA	3 mA/50 µA	25 mA/200 µA	60 mA/500 µA	40 mA/350 µA	40 mA/350 µA	15 mA/150 µA	55 mA/450 µA
# of I/O Pins	8	16 + 2 Serial	16 + 2 Serial	16 + 2 Serial	16 + 2 Serial	32 + 2 Serial	16 + 2 Serial	16 + 2 Serial
Source/Sink Current per I/O	20 mA/25 µA	20 mA/25 mA	30 mA/30 mA	30 mA/30 mA	30 mA/30 mA	30 mA/30 mA	30 mA/30 mA	30 mA/30 mA
Source/Sink Current per Unit	40 mA/50 µA	40 mA/50 mA per 8 I/O pins	60 mA/60 mA per 8 I/O pins	60 mA/60 mA per 8 I/O pins	60 mA/60 mA per 8 I/O pins	60 mA/60 mA per 8 I/O pins	60 mA/60 mA per 8 I/O pins	60 mA/60 mA per 8 I/O pins
PBASIC Commands	32	42	45	45	61	61	61	63

**BASIC Stamp 1 Module** - Affordable yet capable; perfect for smaller projects or tight spaces.

**BASIC Stamp 2 Module** - Ideal for beginners yet quite powerful, with a vast resource base and sample code. The BS2 is the core of our Stamps in Class program.

**BASIC Stamp 2e Module** - Perfect for those who have experience with the BASIC Stamp 2 and would like more data and program space.

**BASIC Stamp 2sx Module** - Supports the BS2 command set with more data and program space at more than twice the execution speed.

**BASIC Stamp 2p24/40 Modules** - In addition to more speed and data space, special commands support I/O polling, character LCDs, and I<sup>2</sup>C and 1-Wire protocols. The BS2P40 has these features plus 16 additional I/O pins.

**BASIC Stamp 2pe Module** - BS2p command set paired with lower power consumption and more memory for battery-powered data logging applications.

**BASIC Stamp 2px Module** - Our fastest BASIC Stamp microcontroller supports the BS2p command set as well as special I/O configuration features.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [System-On-Modules - SOM category](#):*

*Click to view products by [Parallax manufacturer](#):*

Other Similar products are found below :

[COMX-CORE-310](#) [COMX-P4040-4G-ENP2](#) [PICOIMX6U10R1GBNI4G](#) [PICOIMX6U10R1GBNI4GBW](#) [MC27561-TIGER](#) [MC27561-LION](#) [AM335XBBLK-SYSTEM](#) [MC27561-FOX](#) [CC-WMX6UL-SMPL](#) [CB-52-PUS-110-SX](#) [BD63725BEFV-EVK-002](#) [5748-PJ-4AA-RI](#) [5728-PJ-4AA-RI](#) [A00150](#) [COMX\\_P4080](#) [A20-SOM-EVB](#) [RK3188-SOM](#) [RK3188-SOM-4GB](#) [100-1225-1](#) [PICOIMX6Q10R1GBNI4G](#) [Nit6Q](#) [PER-TAICX-A10-001](#) [PER-TAIX2-A10-2280](#) [EDL-mPCIe-MA2485](#) [SOM-5897C7-U0A1E](#) [SOM-6896C7-U2A1E](#) [Q7M311-N4200-4GB](#) [SCM180-Dual-2G\\_Industrial](#) [SCM180-Quad-4G-Industrial](#) [3354-HX-X38-RC](#) [3359-GX-226-RC](#) [5728-PJ-4AA-RC](#) [6455-JE-3X5-RC](#) [Morph-IC-II](#) [ET876-X7LV](#) [IFC6301-10-P2](#) [IFC6502-00-P1](#) [IFC67A1-00-P1](#) [IFC6701-00-P1](#) [iW-G27M-SCQM-4L008G-E032G-BIG](#) [iW-G33M-SCMQ-4L002G-E008G-BII](#) [PWSE1000200B](#) [CS-DEPTHAI-04](#) [MYC-C8MMQ6-8E2D-180-C](#) [MYC-Y7Z010-4E512D-667-I](#) [MYD-C4378-4E512D-100-I](#) [MOD5213-100IR](#) [A20-SOM](#) [A20-SOM204-1G](#) [A20-SOM204-1GS16ME16G-MC](#)