


CW1308 Cable

Telecommunication

pro-POWER



2 Pairs

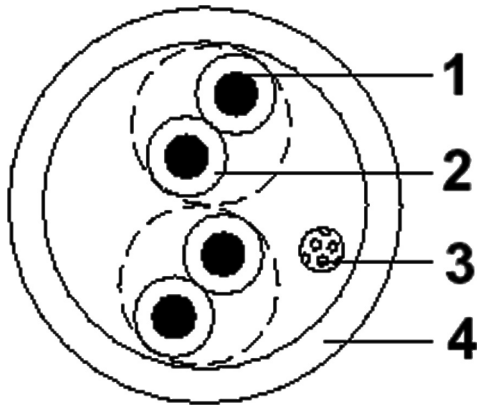

1. Conductor
2. Insulation
3. Rip Cord
4. Sheath

Specifications:

Conductor Material	: Copper
Conductor Area CSA	: 0.196mm ²
Core - Core Capacitance	: 500pF
Insulation Resistance	: 50MΩ
Resistance per Metre	: 0.0978Ω/m
Voltage Rating V AC	: 80V

Category	Telephone Cable	
Description	1/0.5 TC × 2 Pairs + Insulation + Rip Cord + Sheath Outer Diameter 4.2mm	
Conductor	1/0.5 ±0.015mm TC × 2 Pairs	
Insulation	Colour Chart	
	Pair 1	Pair 2
	White-Blue/Blue-White	White-Orange/Orange-White
	Material : PVC/Colour : 2 Pairs	
	Minimum Thickness 0.17mm/Nominal Thickness ≥0.2mm/Nominal Outer Diameter 0.95 ±0.05mm	
	Spark Test : 2,500V AC	
Twisting	2 Pairs/Nominal Outer Diameter ~ 1.9mm	
Group Twisting	2 Pairs/Nominal Outer Diameter ~ 1.9mm	
Filler	Rip Cord	
Sheath	Material : PVC/Colour: Any	
	Minimum Thickness 0.48mm/Nominal Thickness ≥0.6mm/Nominal Outer Diameter 4.2 ±0.2mm	
Physical Properties	Insulation Before Aging : Elongation ≥100%/Tensile Strength ≥8N/mm ²	
	Sheath Before Aging : Elongation ≥100%/Tensile Strength ≥8N/mm ²	
Electrical Properties	Conductor Maximum DC Resistance : 93.4 Ω/km 20°C	
	Voltage Test : Core to Core : 1,500V AC/1 minute	

Dimensions : Millimetres

www.element14.com
 www.farnell.com
 www.newark.com
 www.cpc.co.uk


pro-POWER

CW1308 Cable

Telecommunication

pro-POWER

10 Pairs



1. Conductor
2. Insulation
3. Polyester Tape
4. Rip Cord
5. Sheath

Category	Telephone Cable			
Description	1/0.5 TC × 10 Pairs + Insulation + Polyester Tape + Rip Cord + Sheath Outer Diameter 7.5mm			
Conductor	1/0.5 ±0.015mm TC × 10 Pairs			
Insulation	Colour Chart			
	Pair 1	Pair 2	Pair 3	Pair 4
	White-Blue/Blue-White	White-Orange/Orange-White	White-Green/Green-White	White-Brown/Brown-White
	Pair 5	Pair 6	Pair 7	Pair 8
	White-Grey/Grey-White	Red-Blue/Blue-Red	Red-Orange/Orange-Red	Red-Green/Green-Red
	Pair 9		Pair 10	
	Red-Brown/Brown-Red		Red-Grey/Grey-Red	
	Material : PVC/Colour : 10 Pairs			
Minimum Thickness 0.17mm/Nominal Thickness ≥0.2mm/Nominal Outer Diameter 0.95 ±0.05mm				
Spark Test : 2,500V AC				
Twisting	10 Pairs/Nominal Outer Diameter ~ 1.9mm			
Group Twisting	10 Pairs + Polyester Tape/Nominal Outer Diameter ~ 5.71mm			
Filler	Polyester Tape 100% Coverage			
	Rip Cord			
Sheath	Material : PVC/Colour : Any			
	Minimum Thickness 0.64mm/Nominal Thickness ≥0.8mm/Nominal Outer Diameter 7.5 ±0.2mm			
Physical Properties	Insulation Before Aging : Elongation ≥100%/Tensile Strength ≥8N/mm ²			
	Sheath Before Aging : Elongation ≥100%/Tensile Strength ≥8N/mm ²			
Electrical Properties	Conductor Maximum DC Resistance : 93.4Ω/km 20°C			
	Voltage Test : Core to Core : 1,500V AC/1 minute			

Dimensions : Millimetres

Part Number Table

Description	Part Number
Cable, CW1308, 2 Pair, Per M	147769
Cable, CW1308, 10 Pair, Per M	148943

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
 www.farnell.com
 www.newark.com
 www.cpc.co.uk

pro-POWER

X-ON Electronics

Authorized Distributor

Click to view similar products for [Pro Power manufacturer](#).

Other Similar products are found below :

[PPCY4C075100M](#) [PPCY3C10050M](#) [PPC217](#) [PP001328](#) [PP001316](#) [PP001109](#) [PP001088](#)

[PP000940](#) [PP030](#) [PP000909](#) [PP001326](#) [PP001308](#) [PP000877](#) [PP000868](#) [PP000704](#)

[PP001163](#) [PP001156](#) [PP001085](#) [PP000510](#) [PP001076](#) [PP000944](#) [PP000914](#) [PP000407](#)

[PP000386](#) [PP000870](#)