



## 4 Port IEEE802.3at Gigabit High Power over Ethernet Midspan



### Features

- Compliant with the IEEE802.3at Standard
- 10/100/1000 Base-T Compatible
- Cisco AP1250 Full Power Support
- Optional Kit available for a 19" Rack Mount<sup>1</sup>
- Full Power of 134.4W—33.6W Per Port
- No Power Management Required
- Full Protection OCP, OVP
- 1 Year Warranty<sup>2</sup>

### Applications

- VoIP Phones
- Access Points
- Security Systems
- IP Cameras

### Safety Approvals

- cUL/UL
- CE

### Mechanical Characteristics

- Length: 224.9mm (8.85in)
- Width: 200mm (7.87in)
- Height: 48.5 mm (1.91in)
- Weight: 1.4Kg (3.0lbs)

### Output Specifications

Model	Number of Ports	SNMP
POE125U-4-AT-R	4	No
POE125U-4-AT-N-R <sup>3</sup>	4	Yes

#### Reference Files:

1. [Multiport Midspan Installation Manual.pdf](#)
2. [19in Rack Mounting Kit Datasheet.pdf](#)
3. [SNMPv2c User Manual-Rev1.7.pdf](#)
4. [SNMPv2c Firmware-Rev1.7.zip](#)
5. [SNMPv2c MIB\\_10\\_30\\_2009.zip](#)

#### Notes:

1. Optional 19" Rack mounting adapter to mount 1 POE125U or 2 side by side. Order P/N POE125U-ACCY01
2. Effective January 1, 2019, warranty is valid for one year from purchase date. Optional extended warranties available-please consult factory for more information
3. Trap functions are no longer supported

**INPUT:**

**AC Input**

Voltage Range 90 to 264VAC

**Input Frequency**

47-63Hz

**Input Current**

2.5A (RMS) max for 90VAC  
1.3A (RMS) max for 240VAC

**Leakage Current**

3.5mA max @ 254VAC 60Hz

**AC Inrush Current**

30A (RMS) max for 115VAC  
60A (RMS) max for 230VAC

**OUTPUT:**

**Total Output Power**

33.6W per port

**Ripple and Regulation**

100mV max

**Efficiency<sup>2</sup>**

75% (typical) at max load, 120VAC 60Hz

**Hold-up Time**

10mS min. 120VAC, max load

**Transient O/P Voltage Protection**

60V max at switch on/off at any AC line Phase

**Turn-On Delay Time**

3 sec max at max load, 120VAC 60Hz, 25Hz

**ENVIRONMENTAL:**

**Temperature**

Operation	0°C to +40°C
Non-operation	-25°C to +65°C
Humidity	5 to 90%

**EMC**

FCC Class B  
EN55022 Class B

**Isolation Test**

Primary to Secondary: 4242VDC, 1 minute  
Primary to Ground: 2121VDC, 1 minute  
Secondary to Ground: 2121VDC, 1 minute

**Immunity EN50082-1**

ESD:	EN61000-4-2, Level 3
RS:	EN61000-4-3, Level 2
EFT:	EN61000-4-4, Level 2
Surge:	EN61000-4-5, Level 3
CS:	EN61000-4-6, Level 2
Voltage Dips	EN61000-4-11
Harmonic:	EN61000-3-2, Class A

**IEEE 802.3at Interoperability**

UNH Interoperability report available on request

**FEATURES:**

**Cisco**

No extern parts required for Legacy devices:  
VoIP Phones: 7910, 7912, 7940, 7960  
Access Points: 1040, 1140, 1250, 1260, 3500

**Over Voltage/Current, Short Circuit Protection**

Outputs equipped with short circuit protection and overload protection as per 802.3at specifications. The output can be shorted permanently without damage

**Over Temperature Protection**

Automatic shutdown without damage

**Indicators**


Green LED: Power detected “ON”  
Yellow LED: Fault detected

**Input Connector**


AC Input IEC320 C14

Notes:

1. The characteristics defined are at ambient temperature of 25°C unless otherwise specified
2. Efficiency is measured after 30 minutes burn-in

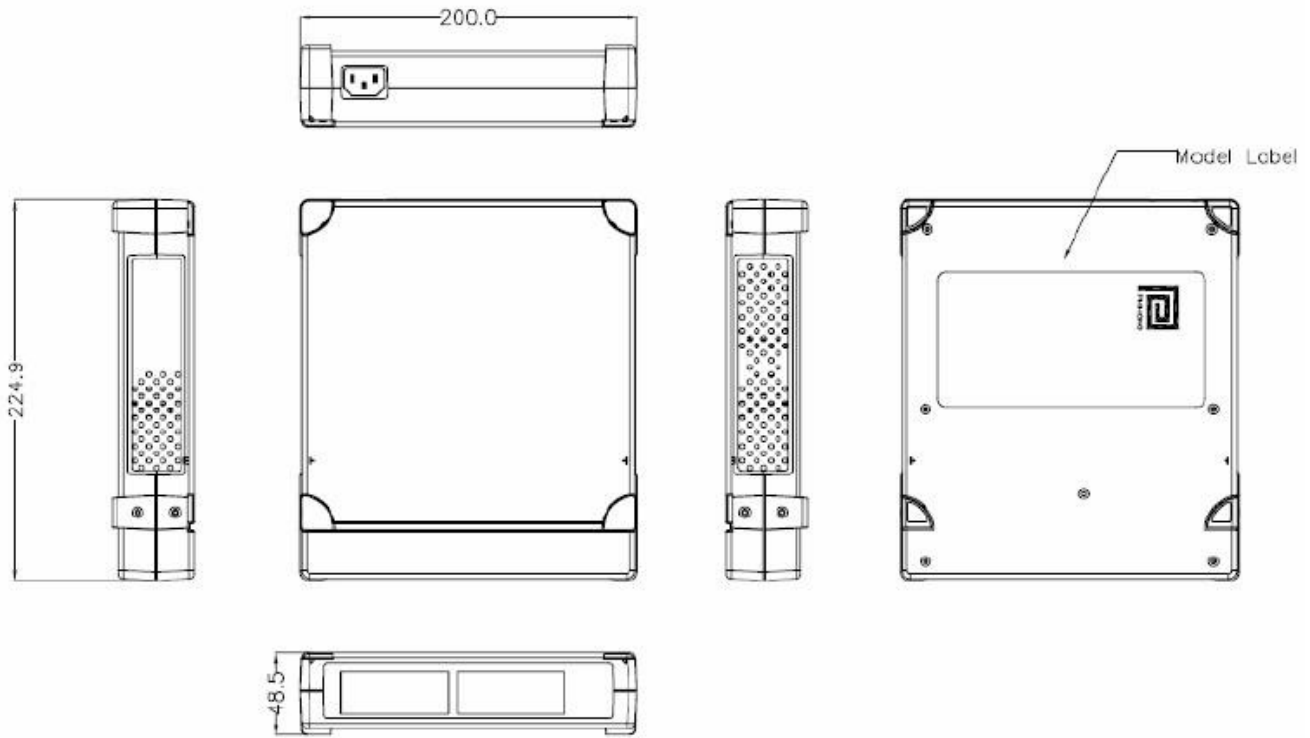

**Façade Display Showing Optional Rack Mounting**

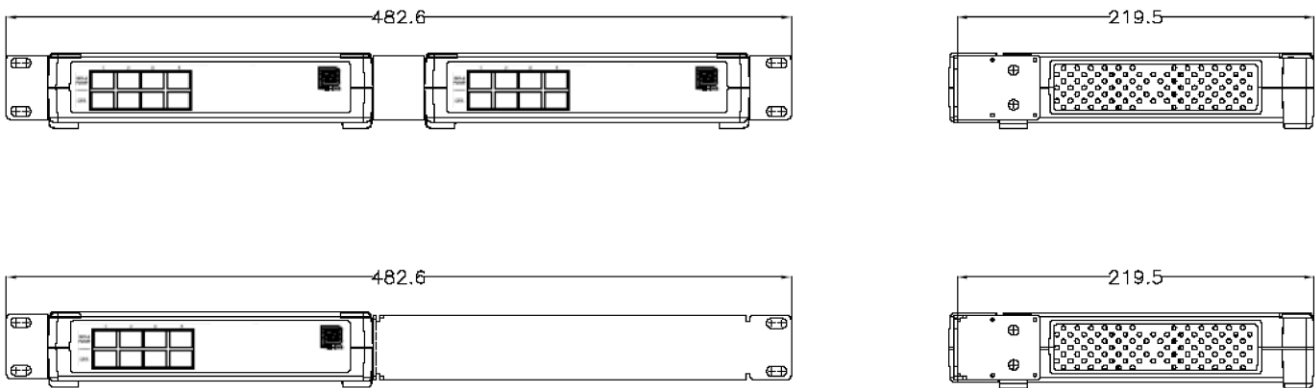

**Supplier's Declaration of Conformity**  
**47 CFR § 2.1077 Compliance Information**

Phihong USA Corporation  
47800 Fremont Boulevard  
Fremont, CA 94538  
Telephone: (510) 445-0100  
[www.phihong.com](http://www.phihong.com)

NOTE: This model has/The models in this products series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power over Ethernet - PoE category](#):*

*Click to view products by [Phihong manufacturer](#):*

Other Similar products are found below :

[PD-3504G/AC](#) [PD-9601G/AC](#) [PD-3504G/AC-EU](#) [180993-3001](#) [GHOSTBRIDGE-POE](#) [EKI-2701HPI-AE](#) [EKI-2701MPI-AE](#) [EKI-2701MPI-R-AE](#) [EKI-2701PSI-AE](#) [EKI-2741FHPI-AE](#) [PALS400-2482G](#) [PALS600-2482G](#) [AWPOE](#) [PD-9001GC/AC](#) [PD-9001GI/DC](#) [PD-9001GO-ET/AC](#) [PD-9001GR/AT/AC-EU](#) [PD-9601GC/AC-EU](#) [PD-9601GC/AC](#) [PD-9606GC/AC-EU](#) [PD-9612GC/AC-EU](#) [PD-9624GC/AC-EU](#) [PD-9624GC/AC-US](#) [PD-9624GC/AC](#) [PD-9001GR/AT/AC-JP](#) [PD-9501GC/AC-EU](#) [PD-6506G/AC/M](#) [PD-9001GRAC](#) [PD-OUT/MBK/G](#) [NPS-30W-B](#) [NPS-30W-WOC](#) [PD-9501GO-ET/AC](#) [PD-9601G/AC-EU](#) [PD-OUT/MBK/ET](#) [PD-OUT/MBK/S](#) [POE14-137-R](#) [POE16R-560L6](#) [POE16S-1AFG-R](#) [POE30S-1ATG-R](#) [POE370U-480-16N-R](#) [POE370U-480-16-R](#) [POE370U-480-8N-R](#) [POE370U-480-8-R](#) [POE45-120-R](#) [POE576U-16ATN-R](#) [POE60D-560G-R](#) [POE60S-1BT-R](#) [POE60S-4AF-R](#) [POE60U-1BT-5](#) [POE90U-1BT6-R](#)