


## 9137 108 59002M

Brand Name	XITANIUM
Description	Xitanium 150W .70A sXt
Input Voltage	220~240
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

### Electrical Specifications

Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency @ Max Load	Tcase Max	Input Current at 240V (A)	Max. Input Power (W)	Inrush Current (A <sub>pk</sub> /50%- $\mu$ s)	Max. THD (%)	Power Factor @ Max Load	Surge Protection Common/Diff (KV)	Weight (lbs/grams)	IP Rating
150	60~210	0.70	>92%	80°C	0.69	165	130/165	20	>0.98	3/3	2.8/1270	IP66

#### Wire Diagram

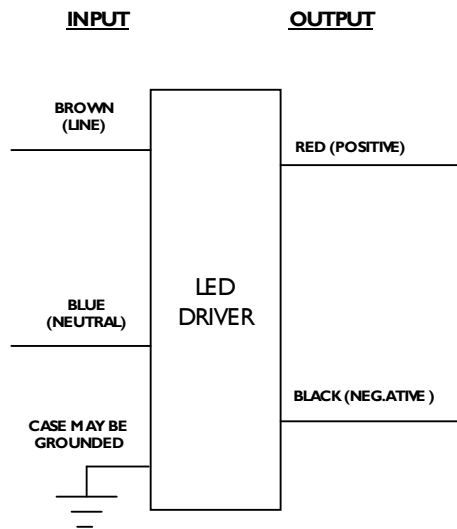

Input and output use lead-wires.  
Lead-wires are 18AWG 105C/600V solid copper.

Standard Lead Length is 270mm+/-30mm on all wires outside the can

#### Enclosure



	in. (mm)
Case Length	8.38 (211.1)
Case Width	2.35 (59.1)
Case Height	1.47 (37.1)
Mounting Length	9.0 (226.2)
Mounting Width	1.7 (42.9)
Overall Length	9.54 (240.5)



05/27/2011

### PHILIPS LIGHTING N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018  
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance  
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



## 9137 108 59002M

Brand Name	XITANIUM
Description	Xitanium 150W .70A sXt
Input Voltage	220~240
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

### Electrical Specifications

#### Product Data

Order code	Add M to the end of the below numbers
Full product code	913710859002M 150W 0.7A
Full product name	LED Xitanium EU 220-240V 150W .70A 210V
Net weight per piece	1.27 KG / 2.8 lbs
Ambient Temp Range	-40C to +55C
Corresponding TC	-15C to +80C
Line Voltage	220-240V
Line Current	0.69A
Line Frequency	50/60Hz
IP Classification	66
Life @ Tcase 67C	80000 hr [nom] refer to graph below
Life @ Tcase 75C	50000 hr [nom] refer to graph below
Suitable for Outdoor use?	Yes
Max TC	80C
Inrush current Width	130 A @ 230V Line @ 165uS Width @50% height, see graph
Maximum ballast number on MCB 16A	TBD [max]
LED Current Tolerance	-5%/+5%
Earth leakage current	0.7 mA [max]
Mains voltage safety (AC)	-27%/+10%
Mains voltage performance (AC)	-10%/+10%
Min. Mains voltage operational	180 V [min]
Output peak voltage	300 V [max]
Output Current ripple	25% @700 mA (ripple = pk-pk/avg)
THD total	< 20%
THD 3 <sup>rd</sup> Harmonic	< 15%
PF @ Max Load	>0.95
Wire Isolation	All wires are Double isolated

#### Installation & Application Notes:

##### Section I – Physical Characteristics

- 1.1 LED Driver shall be installed inside an electrical enclosure
- 1.2 Wiring inside electrical enclosure shall comply with 600V/105°C rating or higher.

##### Section II – Performance

- 2.1 LED Driver has an operating ambient temperature range of -40°C to 55°C.
- 2.2 LED Driver has a maximum life expectancy of 50,000 hours at Tcase of ≤ 75°C.
- 2.3 LED Driver has a maximum life expectancy of 100,000 hours at Tcase of ≤ 63°C.
- 2.4 LED Driver has a maximum self rise of 25°C in open air without heat sink.
- 2.5 LED Driver maximum allowable case temperature is 80°C – see product label for measurement location
- 2.6 LED Driver reduces output power to LEDs if its case temperature exceeds 80°C.
- 2.7 LED Driver has a failure rate ≤ 0.01% per 1,000 hours at Tcase ≤ 70°C.
- 2.8 LED Driver has a failure rate of 0.01% - 0.02% per 1,000 hours at Tcase of 70°C - 80°C.
- 2.9 LED Driver tolerates sustained open circuit and short circuit output conditions without damage.
- 2.10 LED Driver complies with the requirements of CE, ENEC and CISPR 15 Ed 7.2.

05/27/2011

#### PHILIPS LIGHTING N.A.



10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018  
 Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance  
 Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



### 9137 108 59002M

Brand Name	XITANIUM
Description	Xitanium 150W .70A sXt
Input Voltage	220~240
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

### Electrical Specifications

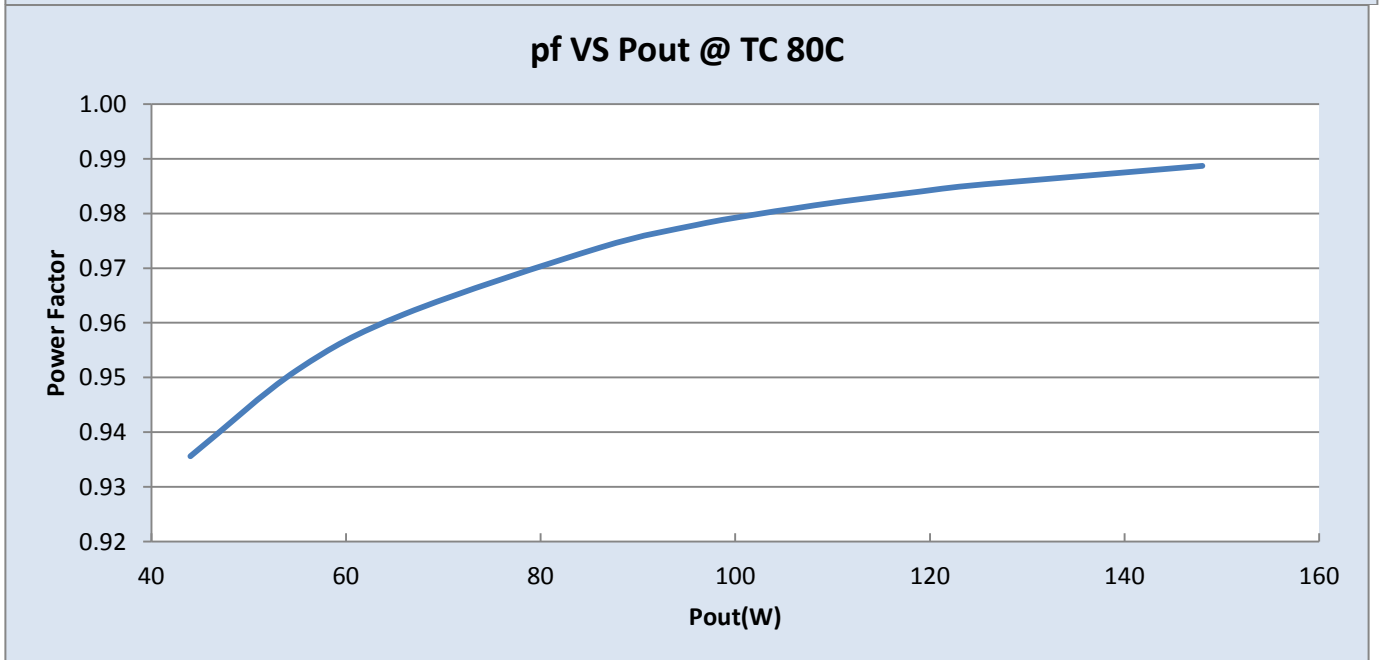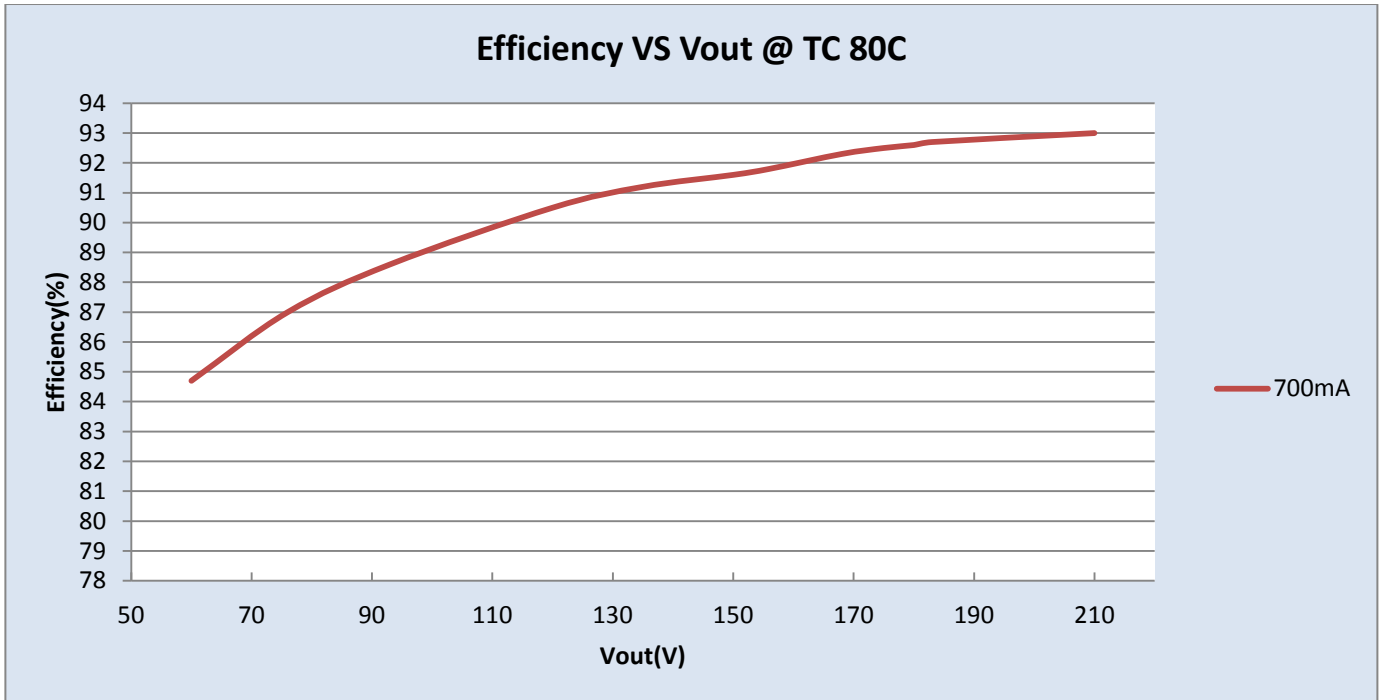

05/27/2011

### PHILIPS LIGHTING N.A.


10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018  
Tel: 800-322-2086 · Fax: 888-423-1882 · [www.philips.com/advance](http://www.philips.com/advance)  
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886




### 9137 108 59002M

Brand Name	XITANIUM
Description	Xitanium 150W .70A sXt
Input Voltage	220~240
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

### Electrical Specifications

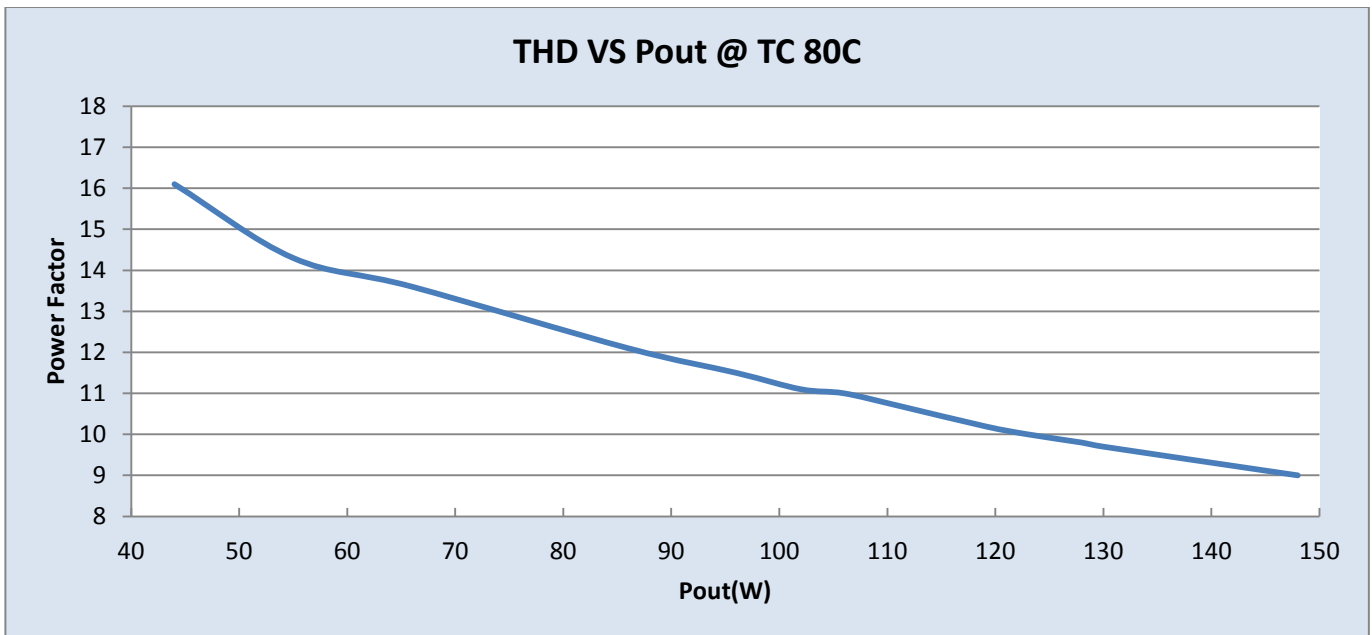

### Iout VS TC of Driver:

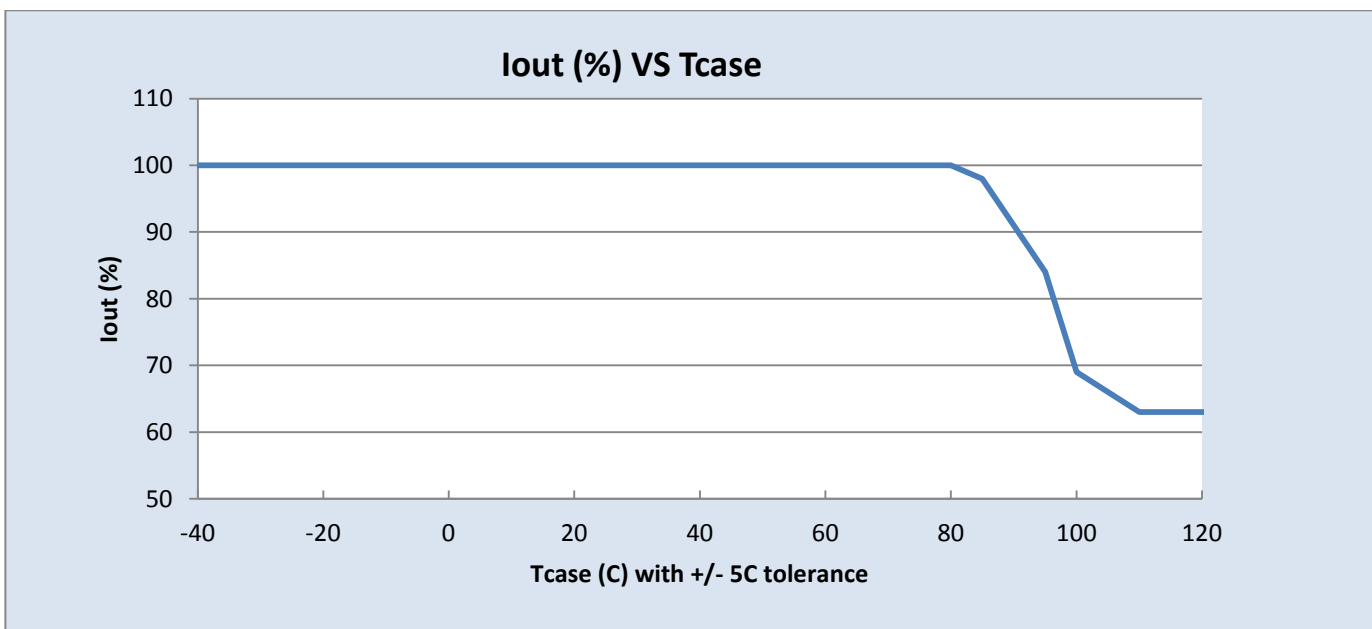

05/27/2011

### PHILIPS LIGHTING N.A.



10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018  
Tel: 800-322-2086 · Fax: 888-423-1882 · [www.philips.com/advance](http://www.philips.com/advance)  
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



## 9137 108 59002M

Brand Name	XITANIUM
Description	Xitanium I50W .70A sXt
Input Voltage	220~240
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

### Electrical Specifications

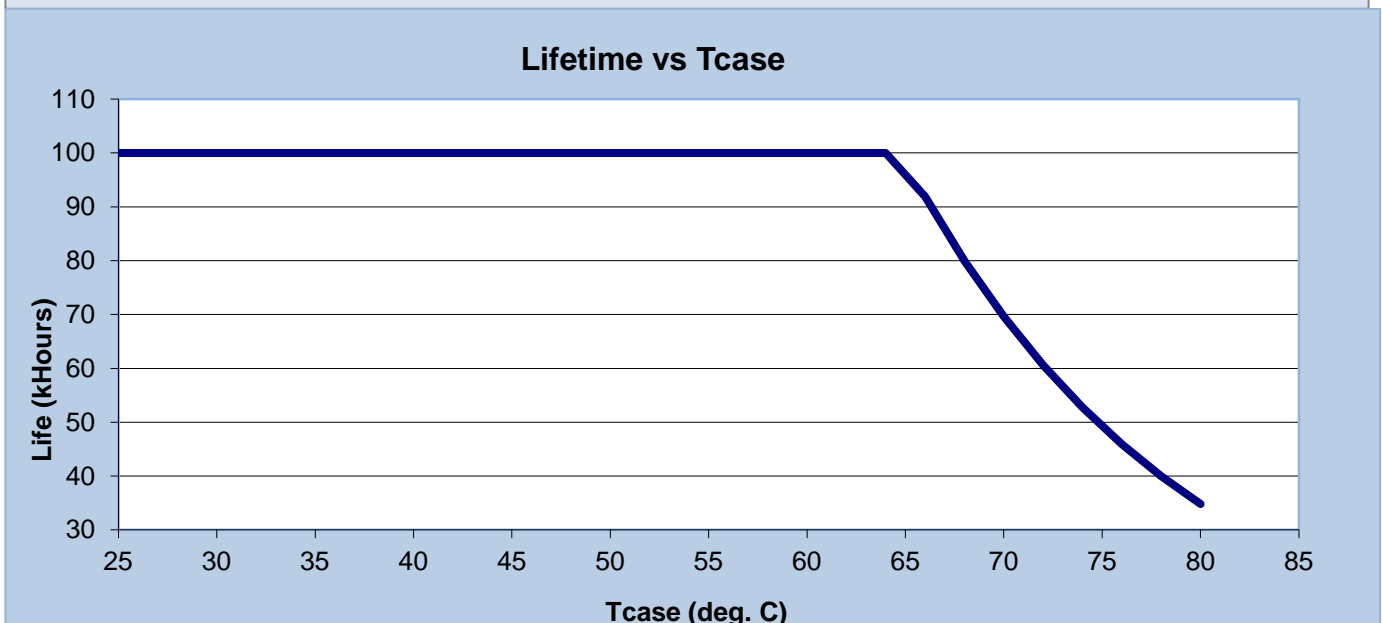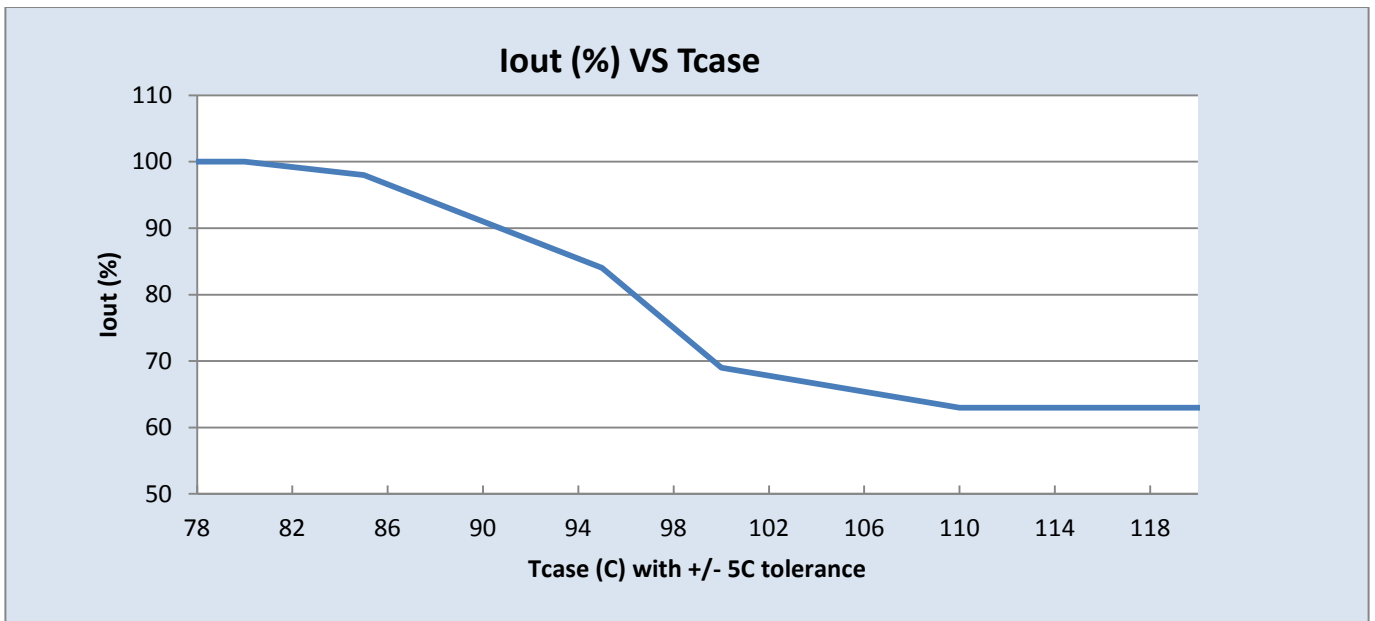

#### Failure Rate Info:

1. <0.01% per 1kHr @<= Tcase 70C

05/27/2011

#### PHILIPS LIGHTING N.A.


10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018  
Tel: 800-322-2086 · Fax: 888-423-1882 · [www.philips.com/advance](http://www.philips.com/advance)  
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886

## 9137 108 59002M


Brand Name	XITANIUM
Description	Xitanium 150W .70A sXt
Input Voltage	220~240
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

### Electrical Specifications

- <0.02% per 1kHr @ Tcase between 70C and 80C.

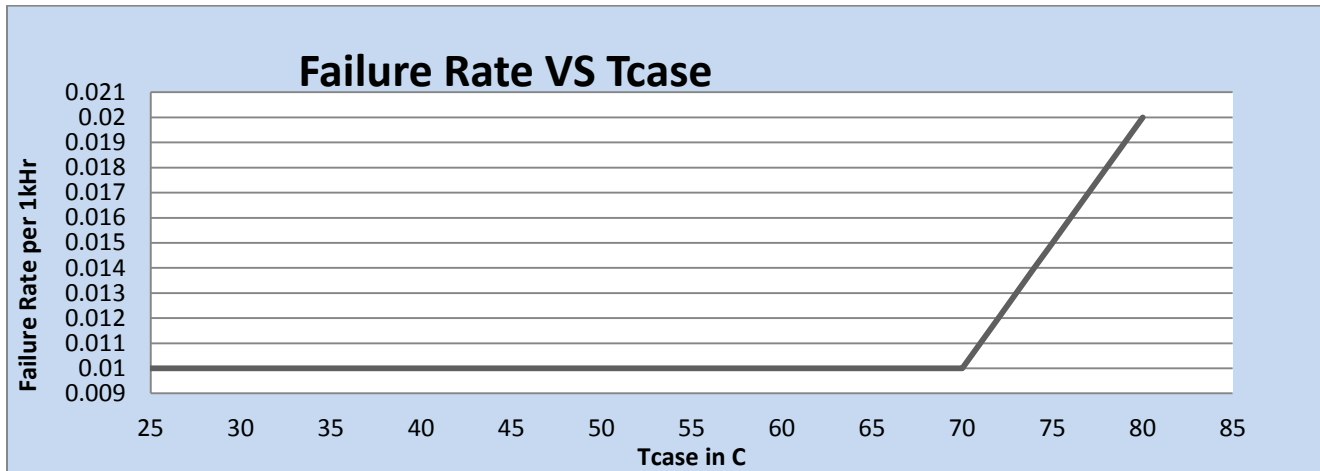

### Inrush Current Info:

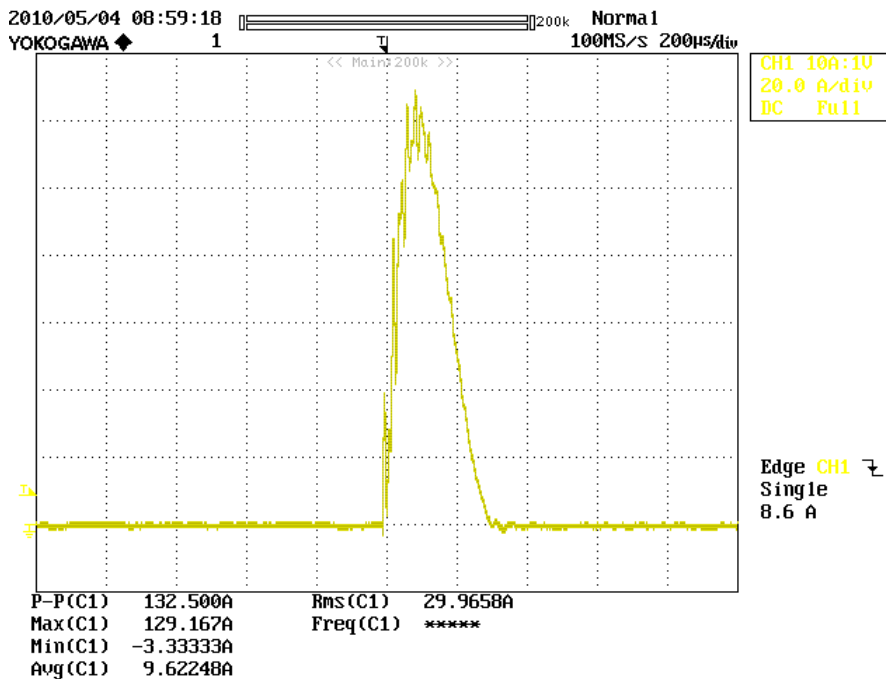

Ipeak	130 A
50% Width	165μS

05/27/2011

### PHILIPS LIGHTING N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018  
 Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance  
 Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [Philips](#) manufacturer:*

Other Similar products are found below :

[PIFC-K250F](#) [PITB-K222A](#) [AC-A60VD24H2.5](#) [ALD-514012PJ134](#) [PWD-60-1-70-P](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [BPOXL 4-12-035](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [HVG-240-48AB](#) [HVG-240-54AB](#) [OTE 25/220-240/700 PC](#) [DAL30W-0600-42-T](#) [HVG-320-48AB](#) [CNB30W-0600-42-CAS](#) [87500757](#) [I-SELECT 2 PLUG 2100MA BL](#) [LCU 48V 75W DC-STR FO](#) [LC 45 W 500-1400 MA FLEXC SC EXC](#) [I-SELECT 2 PLUG 2000MA BL](#) [LC 50/200-350/170 FLEXCC LP](#) [SNC3](#) [LCO 14/100-500/38 O4A NF C EXC3](#) [LC 28W 300-700MA 42 FLEXC NF SC EXC3](#) [LC 44/1050/42 FIXC SRL ADV2](#) [LCA 60W 900-1750MA ONE4ALL C PRE](#) [LC 8/180/44 FIXC SR SNC2](#) [LC 19/200-350/54 FLEXC LP SNC4](#) [BXDR-PS-75BS-E116D-01-A](#) [LC 30/500/54 FIXC SR SNC2](#) [LCA 60W 24V ONE4ALL SC PRE SP](#) [LC 60W 75-330MA 310V FLEXC NF H16 EXC4](#) [LC 8/180/42 FIXC PC SR SNC2](#) [LC 10/350/29 FIXC SR SNC2](#) [LC 25/500/43 FIXC SR SNC2](#) [LC 50/100-400/140 PO4A NF H16 PRE3](#) [LC 25/600/42 FIXC SRL ADV2](#) [LCO 24/200-1050/39 NF C ADV3](#) [ELEMENT 35/220...240/900 G3](#) [LC 25W 350-1050MA FLEXC SR EXC](#) [LC 60/700/86 FIXC SR SNC2](#) [LC 35W 24 ONE4ALL IP PRE](#) [BXDR-PS-25BS-E107D-01-A](#) [LC 17W 250-700MA FLEXC SR EXC](#) [LC 15W 350MA FIXC C SNC](#) [LC 14W 700MA FIXC PC SR SNC2](#) [LC 200W 24V SC SNC](#)