



COMPLIANT SILICONE-FREE 3.0 W/mK THERMALLY CONDUCTIVE GAP FILLER

Tflex™ SF600 is a high performance, silicone-free thermal gap filler with a conductivity of 3.0 W/mK. Tflex™ SF600 is designed for applications which are silicone sensitive. This material is RoHS compliant.

FEATURES AND BENEFITS

- Silicone-free gap pad
- Thermal Conductivity for material thicknesses of 10 to 30 mils is 2.8 W/mK
- Thermal Conductivity for material thicknesses of 40 to 140 mils is 3.0 W/mK
- Available in thicknesses from 0.010-inch (0.25 mm) through 0.140-inch (3.56 mm) in 0.010-inch increments

APPLICATIONS

- Automotive applications
- Applications involving optical components
- Flat panel displays
- Hard drives

Farnell Description :

Tflex SF620 9x9in, thickness = 0.5 mm

Tflex SF640 9x9in, thickness = 1.0 mm

Tflex SF6120 9x9in, thickness = 3.0 mm

Laird-PN:

A16367-42

A16367-44

A16367-12

global solutions: local support.™

Americas: +1.800.843.4556

Europe: +49.8031.2460.0


Asia: +86.755.2714.1166

CLV-customerservice@lairdtech.com

www.lairdtech.com/thermal

Tflex™ SF600 TYPICAL PROPERTIES

	Tflex™ SF600	TEST METHOD
Construction	Boron Nitride filled gap pad	NA
Color	Rose	visual
Thermal Conductivity	3.0 W/mK	Hot Disk
Hardness (Shore 00)	80 Shore 00; 3 seconds	ASTM D2240
Density	1.27 g/cc	Helium Pycnometer
Standard Thickness Range	0.010 - 0.140 inches (0.25 - 3.56 mm)	
Volume Resistivity	10 ¹⁴ ohm-cm	ASTM D257
UL Flammability Rating	V0 (pending)	UL 94
Continuous use temperature	-20° to 125°C	TGA
Weight Loss at 125°C	<0.1% over 24 hrs	TGA
Dielectric Constant @ 1 kHz	3.5	ASTM D150

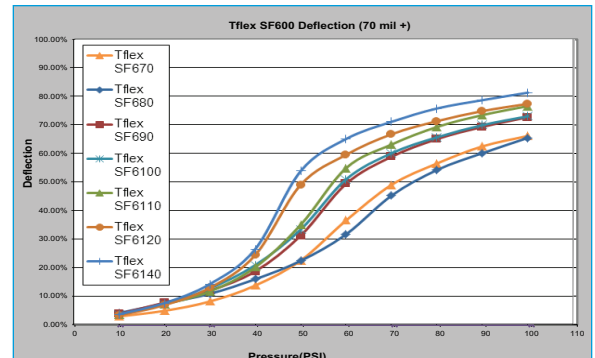

STANDARD THICKNESSES

Standard thickness is 0.010-inch (0.25 mm) through 0.140-inch (3.56 mm) and available in 0.010-inch (0.25 mm) increments. 0.010-inch is only available in custom cut parts (sheet material is not available).

MATERIAL NAME AND THICKNESS

Tflex™ indicates Laird Technologies' brand thermally conductive elastomeric gap filler product. SF6xx indicates 'SF600 series' 3.0 W/mK material, and xxx indicates thickness in mils (0.001-inches)

Examples:

Tflex™ SF620 = 0.020-inch thick material

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thermal Interface Products](#) category:

Click to view products by [Laird Connectivity](#) manufacturer:

Other Similar products are found below :

[63072-2-4013](#) [64442-1-7612](#) [FGN80-2](#) [PFM-172-60](#) [95778-1-5171](#) [A-40](#) [ACDIN4001-01-S](#) [APA502-80-001](#) [188761F00000G](#) [95779-1-5171](#) [9601-7](#) [9614-2-4013](#) [189790F00000](#) [189951F00000G](#) [2103-4-7320](#) [CN9565-000](#) [31570-2-4013](#) [LZ24-1](#) [4103G](#) [450-20-0025](#) [5300AC](#) [1.500G](#) [53-77-13ACG](#) [450-20-0017](#) [4949G](#) [08121](#) [08133](#) [08151](#) [08188](#) [08196](#) [10637-4-1040](#) [54476-2-4013](#) [71883-2-4053](#) [188651F00000G](#) [64445-1-7612](#) [66786-4-7320](#) [TP0001](#) [4952G](#) [4860](#) [450-20-0148](#) [88601-2-2929](#) [SC80-W2](#) [09450-M45](#) [09362-M45](#) [V6516C](#) [A17713-05](#) [A17690-06](#) [A17690-10](#) [A17690-05](#) [A17690-03](#) [A17775-05](#)