














Fiber Optic Cable

■ Specifications(Transmitted beam)

Dimension	Model	(Note1) Cable length(L)	(Note2) Sensing distance (mm)	(Note3) Min. sensing target	Allowable bend radius	Temperature
Free cut 	FT-320-05	2m	150	φ 0.5	15R	-40~+70℃ (Humidity:35~85%RH)
Free cut 	FT-420-10	2m	500	φ 1	30R	
Free cut Cylinder type 	FTC-220-05	2m	150	φ 0.5	15R	
Free cut Cylinder type 	FTC-320-10	2m	500	φ 1	30R	
Free cut SUS Cylinder type 	FTCS-220-05	2m	150	φ 0.5	15R	
Free cut Plastic type 	FTP-320-10	2m	500	φ 1	30R	
Free cut High-flex type 	FT-420-13	2m	400	φ 1	4R	
Free cut SUS type 	FTS-320-05	2m	150	φ 0.5	15R	
	FTS2-320-05				(SUS part 10R)	
Free cut SUS type 	FTS-420-10	2m	500	φ 1.0	30R	
	FTS2-420-10				(SUS part 10R)	
Free cut SUS type 	FTS1-320-05	2m	150	φ 0.5	15R	
Free cut Heat-resistant type 	FT-420-10H	2m	300	φ 1.0	30R	-40~+105℃
Free cut Heat-resistant type 	FT-420-15H1	2m	500	φ 1.0	50R	-40~+150℃
Glass type Heat-resistant type 	GT-420-13H2	2m	400	φ 1.0	25R	-40~+250℃

※ (Note1) The length of fiber optic cable is optional.

※ (Note2) The sensing distance is a standard for Red LED of BF4 Series and 10% of Red LED is applied when it is Green LED.

※ (Note3) The smallest sensing target is detected in maximum sensitivity, so this value is not standard.

※ Free cut The sensing distance can be shortened about 20% than the normal according to condition of the cable.
[(FC-2) should be used for cutting fiber cable.]

Fiber Optic Cable

■ Specifications(Diffuse reflective)

Dimension	Model	(Note1) Cable length(L)	(Note2) Sensing distance (mm)	(Note3) Min. sensing target	Allowable bend radius	Temperature
Free cut 	FD-320-05	2m	40	φ 0.03	15R	-40~+70℃ (Humidity:35~85%RH)
Free cut 	FD-420-05	2m	40	φ 0.03	15R	
Free cut 	FD-620-10	2m	120	φ 0.03	30R	
Free cut Cylinder type 	FDC-320-05	2m	40	φ 0.03	15R	
Free cut SUS Cylinder type 	FDCS-320-05	2m	40	φ 0.03	15R	
Free cut Plastic type 	FDP-320-10	2m	120	φ 0.03	30R	
Free cut SUS type 	FDS-320-05	2m	40	φ 0.03	15R (SUS part 10R)	
	FDS2-320-05					
Free cut SUS type 	FDS-420-05	2m	40	φ 0.03	15R (SUS part 10R)	
	FDS2-420-05					
Free cut SUS type 	FDS-620-10	2m	120	φ 0.03	30R (SUS part 10R)	
	FDS2-620-10					
Free cut Coaxial type 	FD-320-F	2m	40	φ 0.03	15R	
Free cut Coaxial type 	FD-320-F1	2m	60	φ 0.03	15R	
Free cut Coaxial type 	FD-620-F2	2m	120	φ 0.03	30R	
Free cut Heat-resistant type 	FD-620-10H	2m	120	φ 0.03	30R	-40~+105℃
Free cut Heat-resistant type 	FD-620-15H1	2m	160	φ 0.03	50R	-40~+150℃
Glass type Heat-resistant type 	FD-420-20H2	2m	100	φ 0.03	50R	-40~+250℃
Glass type Heat-resistant type 	FD-620-20H2	2m	100	φ 0.03	50R	-40~+250℃

※ (Note1) The length of fiber optic cable is optional.

※ (Note2) The sensing distance is a standard for Red LED of BF4 Series and the sensing target is □ 50mm of non-glossy white paper and 10% of Red LED is applied when it is Green LED.
(FD-620 Type is the value measured at the max. sensitivity using □ 100mm of non-glossy white paper.)

※ (Note3) The smallest sensing target is detected in maximum sensitivity, so this value is not standard.

※ Free cut The sensing distance can be shortened about 20% than the normal according to condition of the cable.
[(FC-2) should be used for cutting fiber cable.]

(A) Counter

(B) Timer

(C) Temp. controller

(D) Power controller

(E) Panel meter

(F) Tacho/Speed/Pulse meter

(G) Display unit

(H) Sensor controller

(I) Switching power supply

(J) Proximity sensor

(K) Photo electric sensor

(L) Pressure sensor

(M) Rotary encoder

(N) Stepping motor & Driver & Controller

(O) Graphic panel

(P) Production stoppage models & replacement

Fiber Optic Cable

Dimensions

Model	Diffuse reflective	Model	Transmitted beam
FD-320-05 M3-D0.5 Free cut Adapter		FT-320-05 M3-D0.5 Free cut Adapter	
FD-420-05 M4-D0.5 Free cut Adapter		FT-420-10 M4-D1.0 Free cut	
FD-620-10 M6-D1.0 Free cut		FTC-220-05 φ2-D0.5 Free cut Adapter	
FDC-320-05 M3-D0.5 Free cut Adapter		FTC-320-10 φ3-D1.0 Free cut	
FDCS-320-05 φ3-D0.5 SUS φ1.5×15mm Free cut Adapter		FTCS-220-05 φ1.0-D0.5 SUS φ1×15mm Free cut Adapter	
FDP-320-10 D1.0×2 Plastic Free cut		FTP-320-10 D1.0 Plastic Free cut	
FDS-320-05 M3-D0.5 SUS φ1.5×90mm Free cut Adapter		FT-420-13 M4-D0.265×16 Free cut	
FDS2-320-05 M3-D0.5 SUS φ1.5×45mm Free cut Adapter		FTS-320-05 M3-D0.5 SUS φ1.0×90mm Free cut Adapter	
FDS-420-05 M4-D0.5 SUS φ1.5×90mm Free cut Adapter		FTS1-320-05 M3-D0.5 SUS φ1.0×35mm Free cut Adapter	
FDS2-420-05 M4-D0.5 SUS φ1.5×45mm Free cut Adapter		FTS2-320-05 M3-D0.5 SUS φ1.0×45mm Free cut Adapter	
FDS-620-10 M6-D1.0 SUS φ2.5×90mm Free cut		FTS-420-10 M4-D1.0 SUS φ1.5×90mm Free cut	
FDS2-620-10 M6-D1.0 SUS φ2.5×45mm Free cut		FTS2-420-10 M4-D1.0 SUS φ1.5×45mm Free cut	
FD-320-F Co-axial M3 φ0.5, φ0.25×4 Free cut Adapter		FT-420-15H M4-D1.0 Heat Resistant 105°C Free cut	

Fiber Optic Cable

Dimensions

Model	Diffuse reflective	Model	Diffuse reflective
FT-420-15H1 M4-D1.0 Heat Resistant 150°C Free cut		GT-420-13H2 M4-D1.4 Heat Resistant Max.250°C Glass Free cut	
Model	Transmitted beam	Model	Transmitted beam
FD-320-F1 Co-axial M3 φ0.5, φ0.25×9 Free cut Adapter		FD-620-15H1 M6-D1.5 Heat Resistant 150°C Free cut	
FD-620-F2 Co-axial M6 φ1.0 φ0.25×16 Free cut		GD-420-20H2 M4-D0.05×1000 Heat Resistant 250°C Free cut	
FD-620-10H M6-D1.0 Heat Resistant 105°C Free cut		GD-620-20H2 M6-D0.05×1000 Heat Resistant 250°C Free cut	

Protecting tube for fiber optic cable (Option)

●Usage : Protect cable from impact or cutting

Model	Dimension
FTH-310	
FTH-410	
FDH-610	

Lens unit (Option)

●Model : FTL-M26



<Lens unit>

<Mounting at cable>

●Applicable fiber optic cable and max. mounting distance

FT-420-10 : 2500mm

FT-420-13 : 2000mm


FT-420-10H : 1500mm

●Mounting of lens

Mount the lens unit on the 3 mm projecting point of the front hood

●Ambient temperature range of lens unit
Able to use within -40°C~100°C.
(Disable to use over 100°C.)

●Dimensions

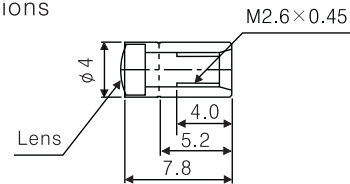



(Unit:mm)

Accessory

○Fiber cutter

Usage : Free cut type, fiber optic cable cutting


●FC-2



φ1.0
φ1.3
φ2.2 (For double cables)
φ2.2

○Adapter

Adapter : should be used.



※Note1)

The inside diameter φ1.0(Standard and black)

The inside diameter φ1.3(Only applied to the receiver of FD-320-F1 and dark gray.)

(Unit:mm)

(A) Counter

(B) Timer

(C) Temp. controller

(D) Power controller

(E) Panel meter

(F) Tacho/Speed/Pulse meter

(G) Display unit

(H) Sensor controller

(I) Switching power supply

(J) Proximity sensor

(K) Photo electric sensor

(L) Pressure sensor

(M) Rotary encoder

(N) Stepping motor & Driver & Controller

(O) Graphic panel

(P) Production stoppage models & replacement

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [autonics manufacturer](#):

Other Similar products are found below :

[E50S8-1000-3-T-24](#) [BC15-LDT-C](#) [BH4M-PDT](#) [BJ100-DDT-P](#) [BJ10M-TDT-C-P](#) [BJ15M-TDT-C-P](#) [BJ15M-TDT-P](#) [BJ1M-DDT-C-P](#) [BJ3M-PDT-P](#) [BJN100-NDT-P](#) [BL13-TDT-P](#) [BR200-DDTN-C-P](#) [BR200-DDTN-P](#) [BTF30-DDTD-P](#) [BUP-30-P](#) [LP-S070-T9D6-C5T](#) [PRDCML18-7DP](#) [PRFT30-10DO-V](#) [PRFWT12-2DO-IV](#) [PRFWT30-10DO-IV](#) [TC4H-14R](#) [TCN4S-22R](#) [TCN4S-24R-P](#) [TK4S-14SR](#) [BC15-LDT-C-P](#) [BEN5M-MFR](#) [BH1M-DDT](#) [BH20M-TDT](#) [BJ10M-TDT-P](#) [BTS30-LDTL-P](#) [BX700-DFR-T](#) [E40S6-3600-3-T-24](#) [PR08-1.5DP](#) [PR08-2DP](#) [TC4S-12R](#) [TMHA-42AE](#) [TMHE-82RE](#) [ASL-L01SP1-PY](#) [ASL-L04SP0-UY](#) [BFX-D1-N](#) [BFX-D1-P](#) [BJP100-BDT](#) [BJP100-BDT-P](#) [BJR100-DDT-C-P-F](#) [BJR100-DDT-P-F](#) [BJR10M-TDT-C-P-F](#) [BJR15M-TDT-C-P-F](#) [BJR15M-TDT-P-F](#) [BJR1M-DDT-C-P-F](#) [BJR3M-PDT-C-P-F](#)