CP Batteries

DATA SHEET

NO MERCURY ADDED

Description: Mercury Free Alkaline Manganese Battery,

AA Size

Chemical System : Alkaline Manganese

Nominal Voltage : 1.5 Volts

Nominal Dimensions : Ø14.5 mm x 50.5 mm

Terminals : Protruded positive(+) and flat negative(-) contacts

Jacket : Foil jacket

Applications : All electronic devices, e.g. toys, digital camera,

mobile phone, PDA, photographic equipment, data banks, calculators, audio appliances, remote

controls, paging machines.

Warranty Period : 36 months


Average Weight : 24.5g

Cross References:

GP	JIS	IEC	Eveready	Duracell
15AU	LR6	LR6	E91	MX1500


Typical Service Life:


Discharge	Discharge	End Point	Service
Resistance	Condition	Voltage	Life
10 Ohms	24 Hrs/Day	0.9V	20.2Hrs

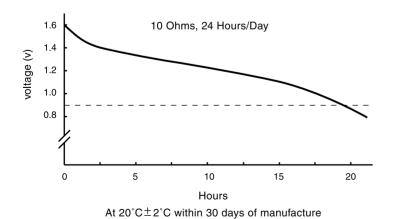

Model No.: GP15AUP







Unit: mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

www.gpbatteries.com.hk

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for gp batteries manufacturer:

Other Similar products are found below:

GP14A S2 GP 15AU ULTRA PLUS B4 GP15E GP 1604 ULTRA PLUS GP 24AU ULTRA PLUS B4 11A B5 A76-U10 13A-U2 15A-U4 15AU-U4 164-U10 189-U10 24AU S2 27A B5 1604AU GP14E GP R20A 312G-U1 ZA13 LR1/910A CC61W-B1 GPR6AU/FO2 GP24A/FO2 SUPER GP X411 AA/AAA + 4X R6 2700MAH RECYKO PB570 + 4XAA 2700MAH PB50 H500 + 4X AA GP U411+ 4 X R6 2000MAH PRO GP U421+ 4 X R6 2100MAH GP U421+ 4 X R6 2600MAH GP U411+ 4 X R6 2600MAH GP XPLOR PH14 BB3 PB550 + 4XAA 2700MAH PB420 + 4XAA 2500MAH PB50 ZA10 B6 GP910A-20 186-U10 GP U211+ 2 X R6 2100MAH GP13G-C20 GP U811+ 4X R6 2100MAH GP XPLOR PH15 BB3 PB320 PB420 GP GP1604AU-C1 GP1604-10 13G U2 177-U10 GP1604GLF-2UE1 192-U10 24G-S2