

Front adapters - FLKM S135/S400/SO122 - 2301749

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The FLKM S135/S400/SO adapter links a SIMATIC® S5 plug directly with the basic SIMATIC® S7 400 card.
Conversion: S5 card 6ES5 432-4UA12 to S7 card 6ES7-421-1BL01-0AA0

RoHS

Key Commercial Data

| | |
|--------------|---------------|
| Packing unit | 1 pc |
| GTIN | |
| GTIN | 4017918962487 |

Technical data

Note

| | |
|--------------|---|
| Type of note | Notes on operation |
| Note | The LEDs of the S7-400 module are hidden. |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Degree of protection | IP00 |

General

| | |
|------------------------------------|--|
| Max. permissible operating voltage | 60 V DC |
| Max. permissible current | 4 A (per path) |
| | 4 A (per connection, supply via separate power supply) |
| Mounting position | any |

Connection data

| | |
|-------------------|----------------------------|
| Connection name | Field level |
| Connection method | SIEMENS S5-135 U pin strip |

Supported controller

| | |
|------------|------------------|
| Controller | SIEMENS S5-135 U |
|------------|------------------|

Front adapters - FLKM S135/S400/SO122 - 2301749

Technical data

Supported controller


| | |
|---------------------|---------------------|
| - suitable I/O card | 6ES5 432-4UA12 |
| Controller | SIEMENS S7-400 |
| - suitable I/O card | 6ES7 421-1BL01-0AA0 |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


Drawings

Connection diagram

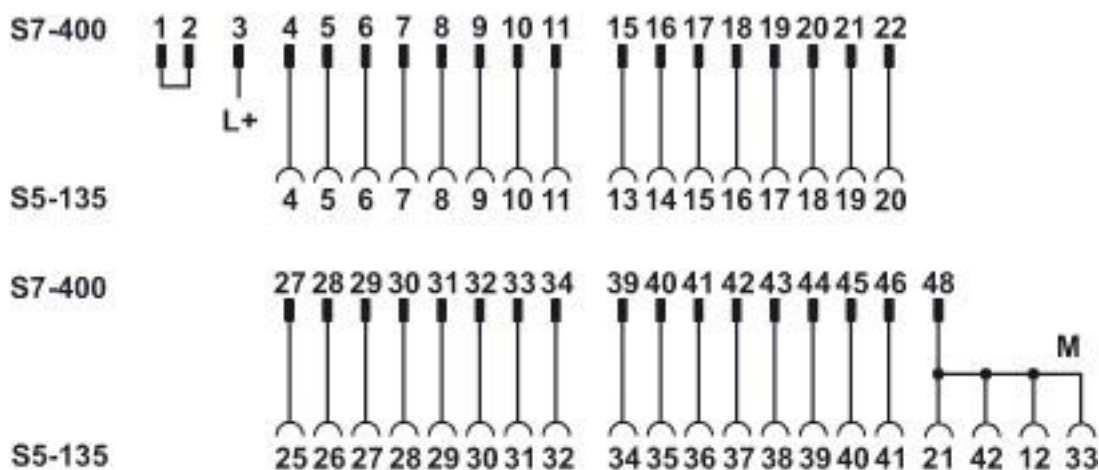

Connection scheme: FLKM S135/S400/SO122

Circuit diagram

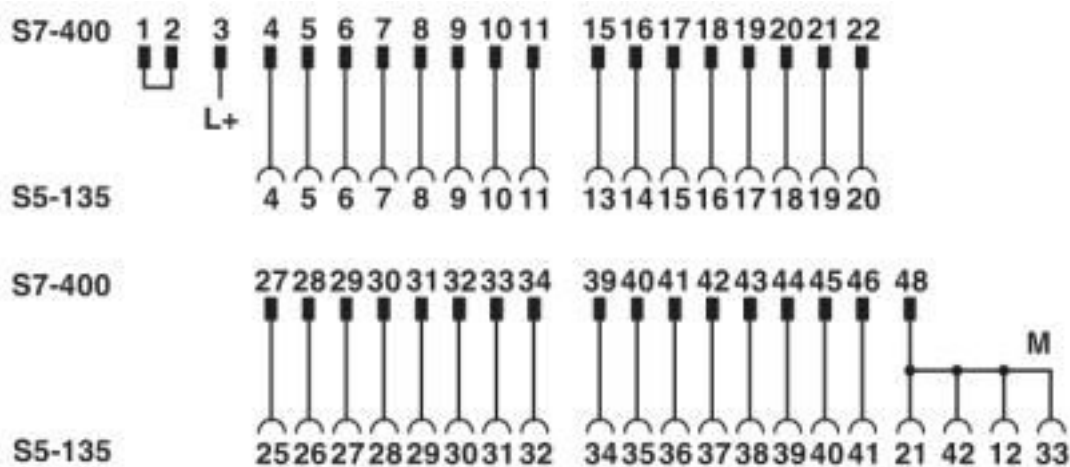

Connection scheme: FLKM S135/S400/SO122

Front adapters - FLKM S135/S400/SO122 - 2301749

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27250300 |
| eCl@ss 4.1 | 27250300 |
| eCl@ss 5.0 | 27250300 |
| eCl@ss 5.1 | 27250300 |
| eCl@ss 6.0 | 27249200 |
| eCl@ss 7.0 | 27249290 |
| eCl@ss 8.0 | 27249290 |
| eCl@ss 9.0 | 27242292 |

ETIM

| | |
|----------|----------|
| ETIM 4.0 | EC002584 |
| ETIM 5.0 | EC002584 |
| ETIM 6.0 | EC002584 |
| ETIM 7.0 | EC002584 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211824 |
| UNSPSC 7.0901 | 39121421 |
| UNSPSC 11 | 39121421 |
| UNSPSC 12.01 | 39121421 |
| UNSPSC 13.2 | 32151601 |
| UNSPSC 19.0 | 32151601 |

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminal Block Tools & Accessories](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[00171430102](#) [00171420102](#) [600HL](#) [600RJ-07](#) [600RJ-11](#) [600RJ-14](#) [600RJS-10](#) [600RJS-12](#) [600RJS-15](#) [600RJS-21](#) [601RJ-09](#) [602SP](#) [602Z](#)
[604J](#) [CSTSPC1-2](#) [7B941-7](#) [88943-2100](#) [QC102](#) [1437403-6](#) [1437403-9](#) [1437403-8](#) [1453128-1](#) [147832-1](#) [EC0037-000](#) [MT2/H--](#) [MT6/H-N](#)
[MT6/V-GRND](#) [MT8/H-51-60](#) [BC2-12](#) [BCC-1-8/10](#) [EP2.5/4UN/BG](#) [1707755](#) [1735590](#) [1755480](#) [1789281](#) [1840227](#) [1840230](#) [2-1437402-1](#)
[JA2-03](#) [JB1-03/J](#) [JB2-04](#) [JB2-05](#) [JB2-07](#) [JB2-09/J](#) [PARALLELJUMPERLINK](#) [JS601](#) [2204082](#) [2302463](#) [2305949](#) [8PCV-BUSHING](#)