

Catamount®

Catamount® General-Purpose Ties & Accessories

In this section...



Catamount® General-Purpose Ties & Accessories

| | |
|---|-----------|
| Twist Tail® Cable Ties | C-62 |
| General-Purpose Cable Ties and Accessories..... | C-63–C-66 |

Thomas & Betts

www.tnb.com

Twist Tail® Cable Ties



Tail twists right off — no tools needed!

Catamount® Twist Tail® Cable Tie

NEW!




- Redesigned using impact-modified nylon to increase both flexibility and wearability
- Unique and improved design for quick, easy no-tool installation
- After installing, remove excess tail with a simple “bend, bend again and twist” motion
- Tail breaks off neat and clean — no sharp edges to damage hands or cables
- Ideal for limited-space installations where you can't fit a cut-off tool
- Suitable for light-duty cable tie applications

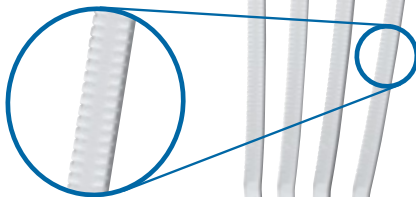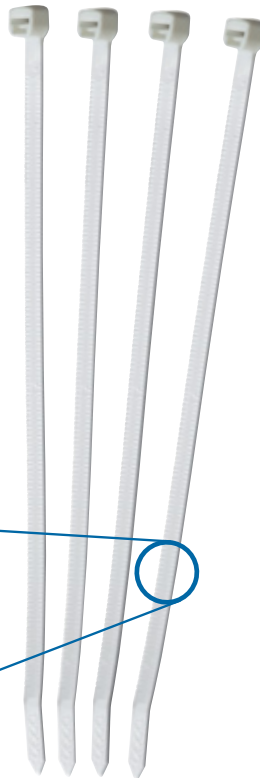

For fast and easy installation, you can't beat the Catamount® Twist Tail® Cable Tie. After you secure the Twist Tail® tie around a bundle of cables, simply grasp the excess tail between your thumb and forefinger, bend, bend in the other direction and twist. The tail breaks right off, leaving no sharp edges to scratch your hands or your cables. The Twist Tail® cable tie makes tail removal easy with its unique design but still provides a full 30 lbs. minimum loop tensile strength — perfect for any general-purpose cable tie application.

| CAT. NO. | LENGTH (IN.) | WIDTH (IN.) | MIN. TENSILE STRENGTH (LBS.) | COLOR | STD. QTY. |
|--------------|--------------|-------------|------------------------------|----------|-----------|
| TT-7-30-9-L | 7 | .187 | 30 | Natural | 50 |
| TT-7-30-0-L | 7 | .187 | 30 | UV Black | 50 |
| TT-11-30-9-L | 11 | .187 | 30 | Natural | 50 |
| TT-11-30-0-L | 11 | .187 | 30 | UV Black | 50 |
| TT-14-30-9-L | 14 | .187 | 30 | Natural | 50 |
| TT-14-30-0-L | 14 | .187 | 30 | UV Black | 50 |

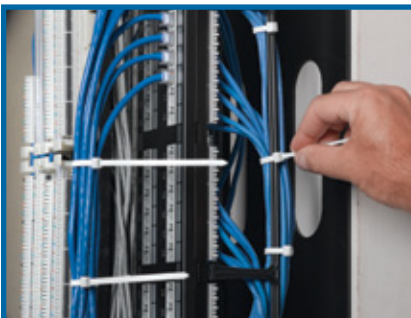

General-Purpose Cable Ties and Accessories

Catamount® Ties fit the needs of general-purpose fastening. Installers quickly discover that Catamount® products offer durable and value-priced cable bundling for a variety of commercial and residential construction applications. Catamount® Ties are offered in a wide range of sizes, styles and colors and meet the requirements for most fastening projects. Catamount® Cable Ties are UL Recognized per File #E-4905.

Miniature — Series 18

| CAT. NO. | LENGTH (IN.) | WIDTH (IN.) | MAX. BUNDLE DIA. (IN.) | COLOR | STD. QTY. |
|------------|--------------|-------------|------------------------|----------|-----------|
| L-4-18-9-C | 4.0 | .100 | 5/8 | Natural | 100 |
| L-4-18-9-M | 4.0 | .100 | 5/8 | Natural | 1,000 |
| L-4-18-0-C | 4.0 | .100 | 5/8 | UV Black | 100 |
| L-4-18-0-M | 4.0 | .100 | 5/8 | UV Black | 1,000 |
| L-6-18-9-M | 6.4 | .100 | 1 1/2 | Natural | 1,000 |
| L-8-18-9-C | 8.0 | .100 | 2 | Natural | 100 |
| L-8-18-9-M | 8.0 | .100 | 2 | Natural | 1,000 |
| L-8-18-0-C | 8.0 | .100 | 2 | UV Black | 100 |
| L-8-18-0-M | 8.0 | .100 | 2 | UV Black | 1,000 |

Intermediate — Series 30/40

| CAT. NO. | LENGTH (IN.) | WIDTH (IN.) | MAX. BUNDLE DIA. (IN.) | COLOR | STD. QTY. |
|-------------|--------------|-------------|------------------------|----------|-----------|
| L-5-30-9-C | 5.6 | .130 | 1 1/4 | Natural | 100 |
| L-5-30-9-M | 5.6 | .130 | 1 1/4 | Natural | 1,000 |
| L-5-30-0-C | 5.6 | .130 | 1 1/4 | UV Black | 100 |
| L-5-30-0-M | 5.6 | .130 | 1 1/4 | UV Black | 1,000 |
| L-8-40-9-C | 8.5 | .140 | 2 | Natural | 100 |
| L-8-40-9-M | 8.5 | .140 | 2 | Natural | 1,000 |
| L-8-40-0-C | 8.5 | .140 | 2 | UV Black | 100 |
| L-8-40-0-M | 8.5 | .140 | 2 | UV Black | 1,000 |
| L-11-40-9-C | 11.5 | .146 | 3 | Natural | 100 |
| L-11-40-9-M | 11.5 | .146 | 3 | Natural | 1,000 |
| L-11-40-0-C | 11.5 | .146 | 3 | UV Black | 100 |
| L-11-40-0-M | 11.5 | .146 | 3 | UV Black | 1,000 |
| L-14-40-9-C | 14.5 | .146 | 4 | Natural | 100 |
| L-14-40-9-M | 14.5 | .146 | 4 | Natural | 1,000 |
| L-14-40-0-C | 14.5 | .146 | 4 | UV Black | 100 |
| L-14-40-0-M | 14.5 | .146 | 4 | UV Black | 1,000 |

Standard — Series 50


| CAT. NO. | LENGTH (IN.) | WIDTH (IN.) | MAX. BUNDLE DIA. (IN.) | COLOR | STD. QTY. |
|-------------|--------------|-------------|------------------------|----------|-----------|
| L-7-50-9-C | 7.5 | .187 | 13/4 | Natural | 100 |
| L-7-50-9-M | 7.5 | .187 | 13/4 | Natural | 1,000 |
| L-7-50-0-C | 7.5 | .187 | 13/4 | UV Black | 100 |
| L-7-50-0-M | 7.5 | .187 | 13/4 | UV Black | 1,000 |
| L-11-50-9-C | 11.1 | .187 | 3 | Natural | 100 |
| L-11-50-9-D | 11.1 | .187 | 3 | Natural | 500 |
| L-11-50-0-C | 11.1 | .187 | 3 | UV Black | 100 |
| L-11-50-0-D | 11.1 | .187 | 3 | UV Black | 500 |
| L-14-50-9-C | 14.1 | .187 | 4 | Natural | 100 |
| L-14-50-9-D | 14.1 | .187 | 4 | Natural | 500 |
| L-14-50-0-C | 14.1 | .187 | 4 | UV Black | 100 |
| L-14-50-0-D | 14.1 | .187 | 4 | UV Black | 500 |

Heavy-Duty

| CAT. NO. | LENGTH (IN.) | WIDTH (IN.) | MAX. BUNDLE DIA. (IN.) | COLOR | STD. QTY. |
|-------------------|--------------|-------------|------------------------|----------|-----------|
| Series 120 | | | | | |
| L-8-120-0-C | 8.0 | .300 | 2 | UV Black | 100 |
| L-11-120-9-C | 11.1 | .300 | 3 | Natural | 100 |
| L-11-120-0-C | 11.1 | .300 | 3 | UV Black | 100 |
| L-14-120-9-C | 14.2 | .300 | 4 | Natural | 100 |
| L-14-120-0-C | 14.2 | .300 | 4 | UV Black | 100 |
| L-18-120-9-L | 18.0 | .300 | 4 3/8 | Natural | 50 |
| L-18-120-0-L | 18.0 | .300 | 4 3/8 | UV Black | 50 |
| L-24-120-9-Q | 24.2 | .300 | 7 | Natural | 25 |
| L-24-120-9-L | 24.2 | .300 | 7 | Natural | 50 |
| L-24-120-0-Q | 24.2 | .300 | 7 | UV Black | 25 |
| L-24-120-0-L | 24.2 | .300 | 7 | UV Black | 50 |
| L-24-120-2-L | 24.2 | .300 | 7 | Red | 50 |
| L-28-120-9-L | 28.0 | .300 | 8 | Natural | 50 |
| L-28-120-0-L | 28.0 | .300 | 8 | UV Black | 50 |
| Series 175 | | | | | |
| L-24-175-9-L | 24.0 | .345 | 7.2 | Natural | 50 |
| L-24-175-0-L | 24.0 | .345 | 7.2 | UV Black | 50 |
| L-36-175-9-L | 36.0 | .345 | 10 3/4 | Natural | 50 |
| L-36-175-0-L | 36.0 | .345 | 10 3/4 | UV Black | 50 |
| L-48-175-9-L | 48.0 | .345 | 15 | Natural | 50 |
| L-48-175-8-L | 48.0 | .345 | 15 | Gray | 50 |
| L-48-175-0-L | 48.0 | .345 | 15 | UV Black | 50 |
| Series 250 | | | | | |
| L-28-250-0-L | 28.0 | .345 | 8 | UV Black | 50 |

For installation tools, see pp. C-46-C-48.

Sample Catalog Order



4" Length, 18-lb. Tensile Strength, Releasable Tie, Natural Color, 100-Pack Quantity

Color

0 – Black (UV Resistant) 9 – Natural
8 – Gray

Pack Quantity

L = 50 D = 500
C = 100 M = 1,000

Style

R = Releasable MH = Mounting Head

General-Purpose Cable Ties and Accessories

Catamount® Cable Tie Assortment Packages

- Natural nylon or black weather-resistant nylon
- Reusable jar
- Easily merchandised
- Great value



| CAT. NO. | LENGTH (IN.) | WIDTH | MAX. BUNDLE (IN.) | TENSILE STRENGTH | MATERIAL | JAR QTY |
|-----------|--------------|-------|-------------------|------------------|-------------------------------|---------|
| 90650-I | 4 | .100 | ¾ | 18# | Natural Nylon | 300 |
| | 7.5 | .187 | 1¼ | 50# | | 300 |
| | 11.1 | .187 | 3 | 50# | | 50 |
| 90650-IUV | 4 | .100 | ¾ | 18# | Black Weather-Resistant Nylon | 300 |
| | 7.5 | .187 | 1¼ | 50# | | 300 |
| | 11.1 | .187 | 3 | 50# | | 50 |

Mounting Head Ties




| CAT. NO. | LENGTH (IN.) | WIDTH (IN.) | MAX BUNDLE DIA. (IN.) | MIN. LOOP TENSILE | MOUNTING HEAD SCREW SIZE | COLOR | STD. QTY. |
|--------------|--------------|-------------|-----------------------|-------------------|--------------------------|----------|-----------|
| L-7-50MH-9-C | 7.5 | .185 | 1¼ | 30 | No. 10 | Natural | 100 |
| L-7-50MH-9-M | 7.5 | .185 | 1¼ | 30 | No. 10 | Natural | 1,000 |
| L-7-50MH-0-C | 7.5 | .185 | 1¼ | 30 | No. 10 | UV Black | 100 |
| L-7-50MH-0-M | 7.5 | .185 | 1¼ | 30 | No. 10 | UV Black | 1,000 |

General-Purpose Cable Ties and Accessories

Cable Tie Mounting Bases

- ¾" and 1" mounts for use with 18# through 50# tensile cable ties
- Supplied on rubber-based adhesive
- Available in 6.6 natural nylon and 6.6 black weather-resistant nylon
- UL94V-2 flammability (clip)

Note: See product expiration date on package. Periodically check product for adhesion and replace as needed. Product is for wire management only and is not intended for use as a primary support of wire, cable, etc.



| CAT. NO. | MOUNT METHOD | COLOR | PKG. QTY. |
|----------------------|---------------------------|----------|-----------|
| ¾" x ¾" Sizes | | | |
| MPNY-750-9-C | Synthetic Rubber Adhesive | Natural | 100 |
| MPNY-750-9-D | Synthetic Rubber Adhesive | UV Black | 500 |
| 1" x 1" Sizes | | | |
| MPNY-1000-9-C | Synthetic Rubber Adhesive | Natural | 100 |
| MPNY-1000-0-C | Synthetic Rubber Adhesive | UV Black | 100 |

For use with 18–50 lb. Cable Ties



– Mounting Surface should be cleaned with alcohol based (IPA) cleaner before application

– Allow 15 minutes setup for maximum performance

Accepts cable ties up to 50-lb. tensile strength!

Adhesive Mounting Cradle

- Supplied on closed cell foam with synthetic rubber-based adhesive
- Use #6 self-tapping screw for added strength if desired



| STD. PKG. CAT. NO. | BULK PKG. CAT. NO. | MATERIAL | H HEIGHT IN./MM | L LENGTH IN./MM | W WIDTH IN./MM | SLOT HEIGHT IN./MM | SLOT WIDTH IN./MM | MOUNT METHOD | STD. PKG. QTY. | BULK PKG. QTY. |
|--------------------|--------------------|-------------------|-----------------|-----------------|----------------|--------------------|-------------------|---------------|----------------|----------------|
| MCNY-1250-9-C | MCNY-1250-9-D | Natural Nylon 6.6 | .285/7.24 | 1.250/31.75 | 1.000/25.4 | .090/2.29 | .300/7.62 | SRA Adhesive* | 100 | 500 |


*Synthetic Rubber Adhesive

Note: See product expiration date on package. Periodically check product for adhesion and replace as needed. Product is for wire management only and is not intended for use as a primary support of wire, cable, etc.

General-Purpose Cable Ties and Accessories

Two-Way Screw Mount

- SMNY-000 accepts 18 lb. (80N) tensile strength cable ties (miniature)
- SMNY-001 accepts up to 50 lb. (222N) tensile strength cable ties

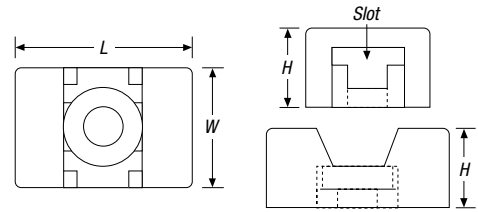


| BULK PKG. CAT. NO. | MATERIAL | H HEIGHT IN./MM | L LENGTH IN./MM | W WIDTH IN./MM | SLOT HEIGHT IN./MM | SLOT WIDTH IN./MM | MOUNT METHOD | BULK PKG. QTY. |
|--------------------|-------------------|-----------------|-----------------|----------------|--------------------|-------------------|----------------|----------------|
| SMNY-000-9-D | Natural Nylon 6.6 | .27/6.86 | .57/14.48 | .34/8.64 | .07/1.78 | .12/3.10 | #4 Screw | 500 |
| SMNY-001-9-D | Natural Nylon 6.6 | .25/7.11 | .60/15.24 | .38/9.77 | .06/1.52 | .20/5.68 | #6 or #8 screw | 500 |

SMNY series for use in temperatures ranging from -40° F to 221° F (-40° C to 105° C).

Four-way screw mount for cable ties up to 50-lb. (222N) tensile strength!

Four-Way Mount

- Mount with #6 or #8 screws
- Available in 6.6 natural nylon

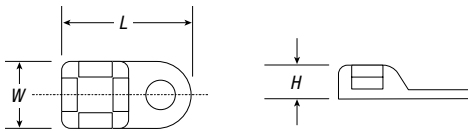

| BULK PKG. CAT. NO. | H IN./MM | L IN./MM | W IN./MM | SLOT W IN./MM | MOUNT SCREW | BULK PKG. QTY. |
|--------------------|----------|-----------|-----------|---------------|-------------|----------------|
| SMNY-220-9-D | .23/5.84 | .95/25.13 | .50/12.70 | .22/5.59 | #6, #8 | 500 |

• Natural nylon color.
For use in temperatures ranging from -40° F to 185° F (-40° C to 85° C).

STRONG — up to 50-lb. tensile strength!


Push Mounts

PMNY-185

- Versatile push mount for cable ties to 50-lb. tensile strength
- For use in .187"/.192" mounting hole for panel thickness .030" to .080"


PMNY-245

- Accepts cable ties to 50-lb. tensile (miniature through standard)
- For use in .250" mounting hole for maximum panel thickness of .062"

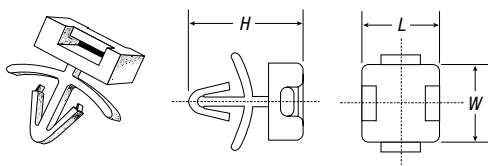


| BULK PKG. CAT. NO. | MATERIAL | H HEIGHT IN./MM | L LENGTH IN./MM | W WIDTH IN./MM | SLOT HEIGHT IN./MM | BULK PKG. QTY. |
|--------------------|----------|-----------------|-----------------|----------------|--------------------|----------------|
| PMNY-185-9-D | Nylon | .64/16.26 | .43/10.92 | .07/1.65 | .07/1.65 | 500 |
| PMNY-254-9-C | Nylon | .36/9.02 | .32/8.13 | .05/1.27 | .22/5.59 | 100 |
| PMNY-245-9-D | Nylon | .36/9.02 | .32/8.13 | .05/1.27 | .22/5.59 | 500 |

• Natural nylon color.
For use in temperatures ranging from -40° F to 185° F (-40° C to 85° C).

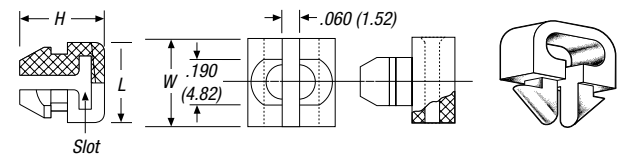

Snap Mounts

- For panel thicknesses from .060" to .150" to hold separate pieces of material together
- For MSNY-166-0-M used with W4 or N4 Series Cable Clamps, allowable panel thickness is .030" to .050"
- For MSNY-187-0-M used with W6 or N6 Series Cable Clamps, allowable panel thickness is .030" to .050"

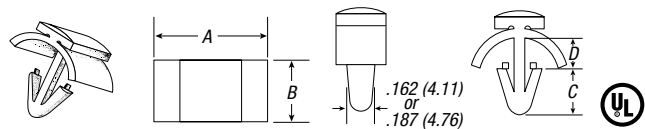

| CAT. NO. | MATERIAL | A IN./MM | B IN./MM | C IN./MM | D IN./MM | BULK PKG. QTY. |
|--------------|----------------|------------|-----------|-----------|-----------|----------------|
| MSNY-166-0-M | UV Black Nylon | .49/12.45 | .31/7.87 | .28/7.11 | .18/4.57 | 1,000 |
| MSNY-187-0-M | UV Black Nylon | .625/15.87 | .343/8.73 | .281/7.14 | .210/5.33 | 1,000 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [abb](#) manufacturer:

Other Similar products are found below :

[TV10-516R](#) [017667013](#) [RF727](#) [2CMA100178R1000](#) [5SDD 92Z0401](#) [ESV14-BS](#) [EZS-21-250](#) [F204AC-40/0.03](#) [F362-25/0.03](#)

[GJL1211001R0011](#) [GJL1211201R8000](#) [GJL1211501R8000](#) [GJL1213001R0017](#) [GJL1213001R0101](#) [GJL1311001R0101](#) [GJL1311001R8010](#)

[GJL1311201R0001](#) [GJL1313001R0011](#) [GJL1313001R0101](#) [GJL1317201R0001](#) [A40-30-10-84](#) [AF09-30-01-11](#) [AF460-30-11-68](#) [1455](#) [B14-](#)

[250](#) [EF45-30](#) [ERG297](#) [HSC2-20](#) [1SAM201904R1001](#) [1SAM350000R1003](#) [1SAZ721201R1009](#) [1SAZ721201R1014](#) [1SAZ721201R1025](#)

[1SDA057197R1](#) [1SFA611101R1002](#) [1SFA611130R1103](#) [1SFA611131R1101](#) [1SFA611143R1101](#) [1SFA611202R1108](#) [1SFA611203R1108](#)

[1SFA611215R1001](#) [1SFA611216R1108](#) [1SFA611285R1002](#) [1SFA611702R6006](#) [1SFA616162R1025](#) [1SFA619100R3015](#)

[1SVR730020R0200](#) [IPC4111](#) [OS30FACC12](#) [OS60GJ03](#)