


## Nimbus C

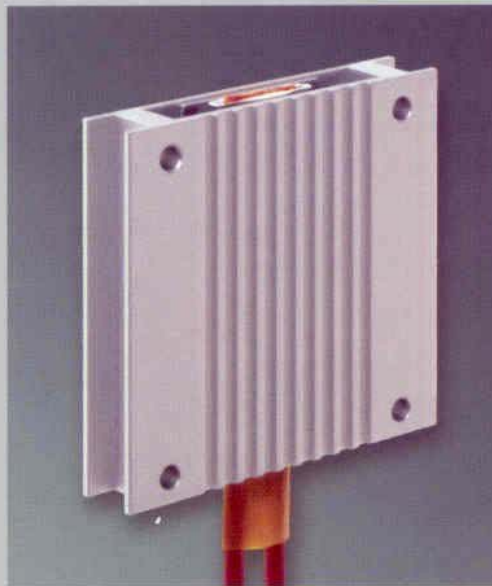


Nimbus C		75		
Rated power at 10°C (free in air)	[W]	20	30	40
Profile temperature (approx.)	[°C]	90	120	150
Voltage range		110 - 240 V, AC/DC		
Protection class		II		
System of protection		IP20		
Connection wires 2 x 0,5 mm <sup>2</sup> , silicone		600 mm long		
Fixing		DIN Clip for 35 mm rail EN50 022		
Approvals		VDE, UL, CSA, CE (in preparation)		
Dimensions	LxWxH [mm]	75x80x15		
Weight	[kg]	0,29		
Recommended fuse (time delay)	240 V	2 A	4 A	4 A
	110 V	2 A	2 A	2 A

Ordering Example: Nimbus C 75, 30 W, 110-240 V  
Special design 12 - 24 V.

## Special Features

- Good convection
- High thermal radiation
- Flat design

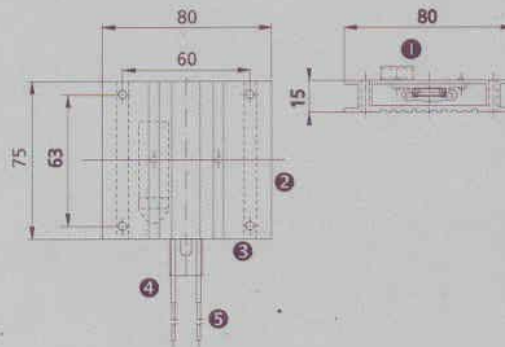

- 1 Fixing clip for 35 mm DIN top hat rail EN50 022
- 2 Aluminium profile
- 3 Fixing holes  $\varnothing$  4,6
- 4 Glass silk tube
- 5 Silicone wire 0,5 mm<sup>2</sup>

Data is given for illustration purposes only and does not release the customer from independent application tests.

  
**European Thermodynamics Limited**  
*Intelligent Thermal Management*

Tel +44 (0)116 292 1501  
Fax +44 (0)116 292 1503

 **DBK**

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [dbk technitherm](#) manufacturer:*

Other Similar products are found below :

[HP06-2/09-240](#) [372467,01](#) [372834,01](#) [372466,01](#) [372735,01](#) [FINGER GUARD LARG NG150](#) [370306,01](#) [371061,01](#) [371082,01](#) [NG240](#)  
[15697,6](#) [HP04-1/04-24](#) [HP06-2/22-24](#) [NG50](#) [FINGER GUARD SMALL](#) [370089,01](#) [15662](#) [15661,2](#) [NG30](#) [NG100](#) [15696,8](#) [371934,01](#)  
[371680,01](#) [HP06-2/13-240](#) [371604,01](#) [370178,01](#) [370184,01](#) [370177,01](#) [370182,01](#) [HP05-1/04-24](#)