

Standard Metal Film Leaded Resistors



A homogeneous film of metal alloy is deposited on a high grade ceramic body. After a helical groove has been cut in the resistive layer, tinned connecting leads of electrolytic copper are welded to the end-caps.

The resistors are coated with a colored lacquer (light-blue for type SFR16S; light-green for type SFR25 and red-brown for type SFR25H) which provides electrical, mechanical and climatic protection. The encapsulation is resistant to all cleaning solvents in accordance with IEC 60068-2-45.

FEATURES

- Low cost
- Low noise (max. 1.5 $\mu\text{V/V}$ for $R > 1 \text{ M}\Omega$)
- Small size (SFR16S: 0204, SFR25/25H: 0207)
- Lead (Pb)-free solder contacts
- Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- Compliant to RoHS directive 2002/95/EC



RoHS
COMPLIANT

APPLICATIONS

- General purpose resistors

TECHNICAL SPECIFICATIONS			
DESCRIPTION	VALUE		
	SFR16S	SFR25	SFR25H
Resistance Range	$\pm 5 \%$; 1 Ω to 3 $\text{M}\Omega$ $\pm 1 \%$; 4.99 Ω to 3 $\text{M}\Omega$ Jumper (0 Ω)	$\pm 5 \%$; 0.22 Ω to 10 $\text{M}\Omega$ $\pm 1 \%$; 1 Ω to 10 $\text{M}\Omega$ Jumper (0 Ω)	
Resistance Tolerance	$\pm 1 \%$, E24/E96 series; $\pm 5 \%$, E24 series		
Temperature Coefficient: $R < 4.7 \Omega$ $4.7 \Omega \leq R \leq 100 \text{ k}\Omega$ $100 \text{ k}\Omega < R \leq 1 \text{ M}\Omega$ $R > 1 \text{ M}\Omega$	$\leq \pm 250 \text{ ppm/K}$ $\leq \pm 100 \text{ ppm/K}$ $\leq \pm 250 \text{ ppm/K}$ $\leq \pm 250 \text{ ppm/K}$	$\leq \pm 100 \text{ ppm/K}$ $\leq \pm 100 \text{ ppm/K}$ $\leq \pm 100 \text{ ppm/K}$ $\leq \pm 250 \text{ ppm/K}$	$\leq \pm 100 \text{ ppm/K}$ $\leq \pm 100 \text{ ppm/K}$ $\leq \pm 100 \text{ ppm/K}$ $\leq \pm 250 \text{ ppm/K}$
Rated Dissipation, P_{70}	0.5 W	0.4 W	0.5 W
Thermal Resistance, R_{th}	170 K/W	200 K/W	150 K/W
Maximum Permissible Voltage, (U_{max} . AC/DC)	200 V	250 V	350 V
Noise: $R < 68 \text{ k}\Omega$ $68 \text{ k}\Omega \leq R \leq 100 \text{ k}\Omega$ $100 \text{ k}\Omega \leq R \leq 1 \text{ M}\Omega$ $R > 1 \text{ M}\Omega$	max. 0.1 $\mu\text{V/V}$ max. 0.5 $\mu\text{V/V}$ max. 1.5 $\mu\text{V/V}$ max. 1.5 $\mu\text{V/V}$	max. 0.1 $\mu\text{V/V}$ max. 0.1 $\mu\text{V/V}$ max. 0.1 $\mu\text{V/V}$ max. 1.5 $\mu\text{V/V}$	max. 0.1 $\mu\text{V/V}$ max. 0.1 $\mu\text{V/V}$ max. 0.1 $\mu\text{V/V}$ max. 1.5 $\mu\text{V/V}$
Basic Specifications	IEC 60115-1		
Climatic Category (IEC 60068-1)	55/155/56		
Stability, ΔR max., After: Load (1000 h, P_{70}): R Range Long Term Damp Heat Test (56 Days): $R \leq 1 \text{ M}\Omega$ $R > 1 \text{ M}\Omega$	$\pm (2 \% R + 0.05 \Omega)$ $\pm (1 \% R + 0.05 \Omega)$ $\pm (1 \% R + 0.05 \Omega)$	$\pm (2 \% R + 0.05 \Omega)$ $\pm (1 \% R + 0.05 \Omega)$ $\pm (1 \% R + 0.05 \Omega)$	$\pm (2 \% R + 0.05 \Omega)$ $\pm (1 \% R + 0.05 \Omega)$ $\pm (2 \% R + 0.1 \Omega)$
Soldering (10 s, 260 $^{\circ}\text{C}$)	$\pm (0.25 \% R + 0.05 \Omega)$	$\pm (0.25 \% R + 0.05 \Omega)$	$\pm (0.25 \% R + 0.05 \Omega)$
Short Time Overload	$\pm (0.25 \% R + 0.05 \Omega)$	$\pm (0.25 \% R + 0.05 \Omega)$	$\pm (1 \% R + 0.05 \Omega)$

Note


- R value is measured with probe distance of 24 mm \pm 1 mm using 4-terminal method

PART NUMBER AND PRODUCT DESCRIPTION																								
PART NUMBER: SFR2500001001FA500																								
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px 5px;">S</td> <td style="padding: 2px 5px;">F</td> <td style="padding: 2px 5px;">R</td> <td style="padding: 2px 5px;">2</td> <td style="padding: 2px 5px;">5</td> <td style="padding: 2px 5px;">0</td> <td style="padding: 2px 5px;">0</td> <td style="padding: 2px 5px;">0</td> <td style="padding: 2px 5px;">0</td> <td style="padding: 2px 5px;">1</td> <td style="padding: 2px 5px;">0</td> <td style="padding: 2px 5px;">0</td> <td style="padding: 2px 5px;">1</td> <td style="padding: 2px 5px;">F</td> <td style="padding: 2px 5px;">A</td> <td style="padding: 2px 5px;">5</td> <td style="padding: 2px 5px;">0</td> <td style="padding: 2px 5px;">0</td> </tr> </table>							S	F	R	2	5	0	0	0	0	1	0	0	1	F	A	5	0	0
S	F	R	2	5	0	0	0	0	1	0	0	1	F	A	5	0	0							
MODEL/SIZE	VARIANT	TCR/MATERIAL	VALUE				TOLERANCE	PACKAGING ⁽¹⁾	SPECIAL															
SFR16S0 SFR2500 SFR25H0	0 = Neutral Z = Value overflow (special)	0 = Standard Z = Jumper	3 digit value 1 digit multiplier MULTIPLIER 7 = *10 ⁻³ 2 = *10 ² 8 = *10 ⁻² 3 = *10 ³ 9 = *10 ⁻¹ 4 = *10 ⁴ 0 = *10 ⁰ 5 = *10 ⁵ 1 = *10 ¹ Z = 0000				F = ± 1 % J = ± 5 % Z = Jumper	N4 A5 A1 R5	The 2 digits are used for all special parts. 00 = Standard															
PRODUCT DESCRIPTION: SFR25 1 % A5 1K0																								
SFR25		1 %	A5		1K0																			
MODEL/SIZE		TOLERANCE	PACKAGING ⁽¹⁾		RESISTANCE VALUE																			
SFR16S SFR25 SFR25H		± 1 % ± 5 %	N4 A5 A1 R5		47K = 47 kΩ 51R1 = 51.1 Ω																			

Notes
⁽¹⁾Please refer to table PACKAGING

- The jumper has a maximum resistance $R_{max.} = 30 \text{ m}\Omega$ at 3 A (SFR16S)
- The jumper has a maximum resistance $R_{max.} = 10 \text{ m}\Omega$ at 5 A (SFR25)
- The PART NUMBER is shown to facilitate the introduction of a unified part numbering system for ordering products

PACKAGING					
MODEL	TAPING	AMMO PACK		REEL	
		PIECES	CODE	PIECES	CODE
SFR16S, SFR25, SFR25H	Axial, 52 mm	5000	A5	5000	R5
		1000	A1		
SFR25, SFR25H	Radial	4000	N4	-	-

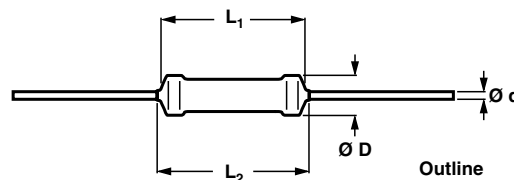DIMENSIONS


DIMENSIONS - resistor types and relevant physical dimensions in millimeters				
TYPE	$\varnothing D_{max.}$	$L_1 \text{ max.}$	$L_2 \text{ max.}$	$\varnothing d$
SFR16S	1.9	3.5	4.1	0.45 ± 0.05
SFR25	2.5	6.5	7.5	0.58 ± 0.05
SFR25H	2.5	6.5	7.5	0.58 ± 0.05

MASS PER UNIT	
TYPE	MASS (mg)
SFR16S	102
SFR25	205
SFR25H	205


OUTLINES

The length of the body (L_1) is measured by inserting the leads into holes of two identical gauge plates and moving these plates parallel to each other until the resistor body is clamped without deformation (IEC 60294).

MARKING

The nominal resistance and tolerance are marked on the resistor using four or five colored bands in accordance with IEC 60062, marking codes for resistors and capacitors.

PRODUCTS WITH RADIAL LEADS (SFR25, SFR25H)

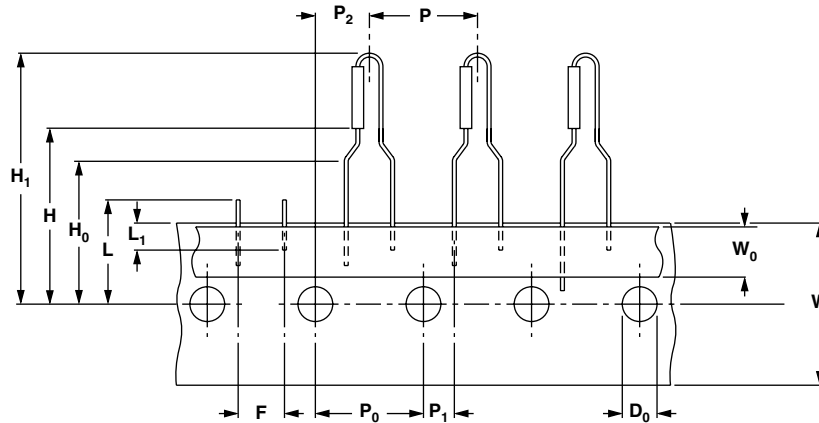

DIMENSIONS - RADIAL TAPING				
SYMBOL	PARAMETER	VALUE	TOLERANCE	UNIT
P	Pitch of components	12.7	± 1.0	mm
P_0	Feed-hole pitch	12.7	± 0.2	mm
P_1	Feed-hole centre to lead at topside at the tape	3.85	± 0.5	mm
P_2	Feed-hole center to body center	6.35	± 1.0	mm
F	Lead-to-lead distance	4.8	+ 0.7/- 0	mm
W	Tape width	18.0	± 0.5	mm
W_0	Minimum hold down tape width	5.5	-	mm
H_1	Component height	29	Max.	mm
H_0	Lead wire clinch height	16.5	± 0.5	mm
H	Height of component from tape center	19.5	± 1	mm
D_0	Feed-hole diameter	4.0	± 0.2	mm
L	Maximum length of snapped lead	11.0	-	mm
L_1	Minimum lead wire (tape portion) shortest lead	2.5	-	mm


Note

- Please refer document number 28721 "Packaging" for more detail

**FUNCTIONAL PERFORMANCE
PRODUCT CHARACTERIZATION**


Standard values of nominal resistance are taken from the E96/E24 series for resistors with a tolerance of $\pm 1\%$ or $\pm 5\%$. The values of the E96/E24 series are in accordance with IEC 60063.

The power that the resistor can dissipate depends on the operating temperature

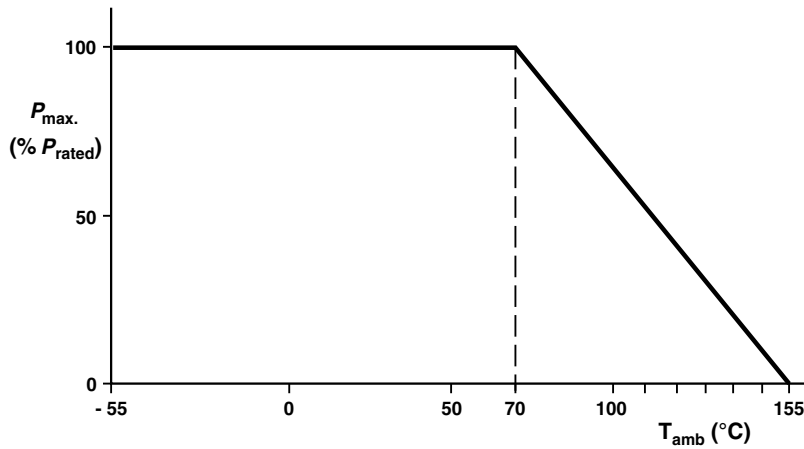


Maximum dissipation (P_{max}) in percentage of rated power as a function of the ambient temperature (T_{amb}).


Derating

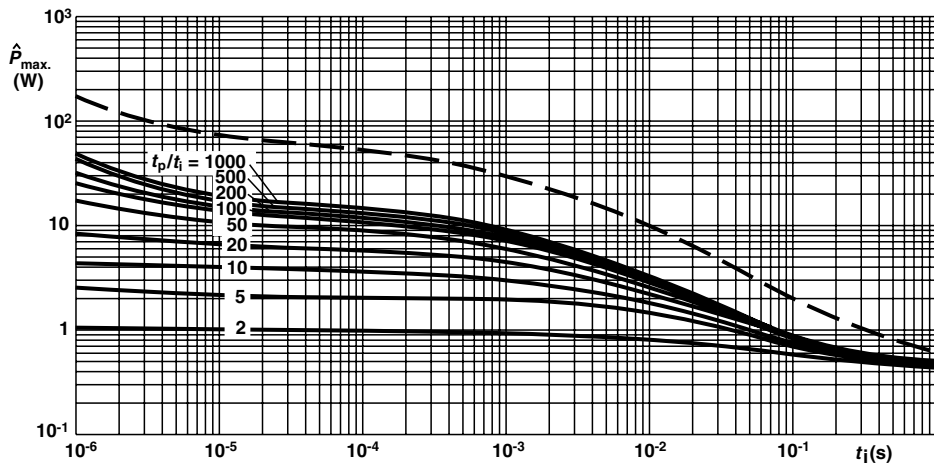

SFR16S Pulse on a regular basis; maximum permissible peak pulse power (\hat{P}_{max}) as a function of pulse duration (t_i)

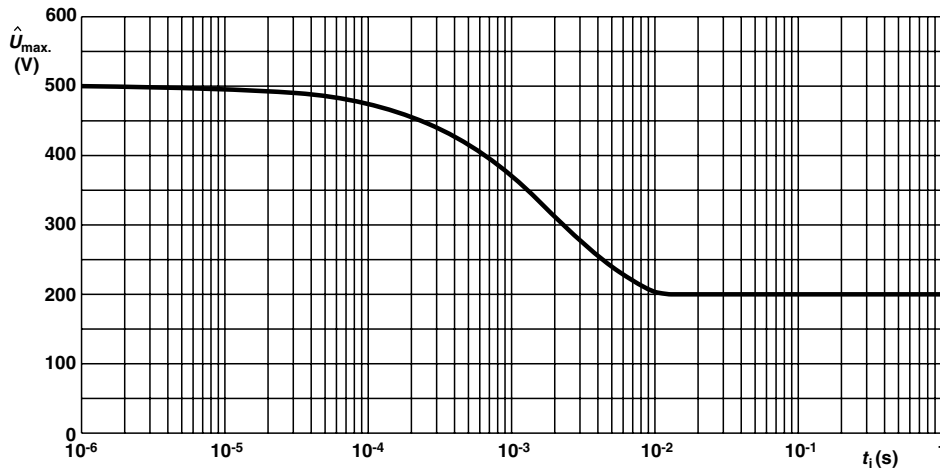


SFR16S Pulse on a regular basis; maximum permissible peak pulse voltage ($\hat{U}_{max.}$) as a function of pulse duration (t_i)

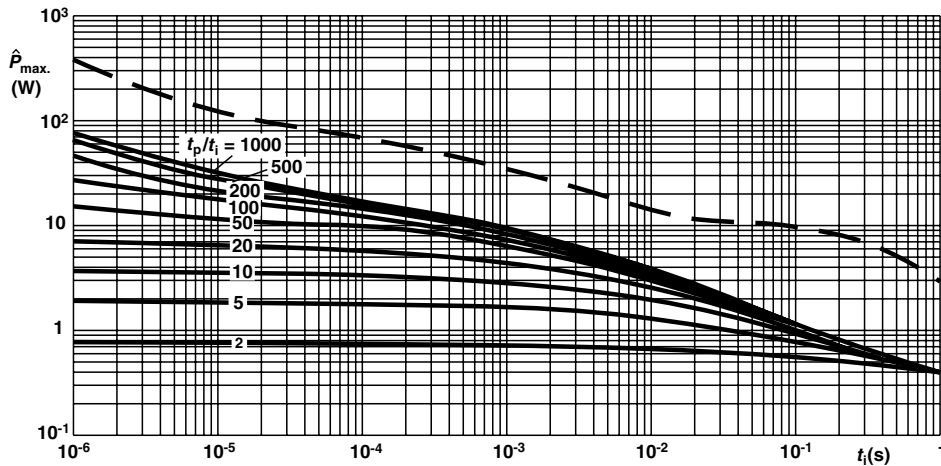


SFR25 Pulse on a regular basis; maximum permissible peak pulse power ($\hat{P}_{max.}$) as a function of pulse duration (t_i)


Pulse Loading Capabilities

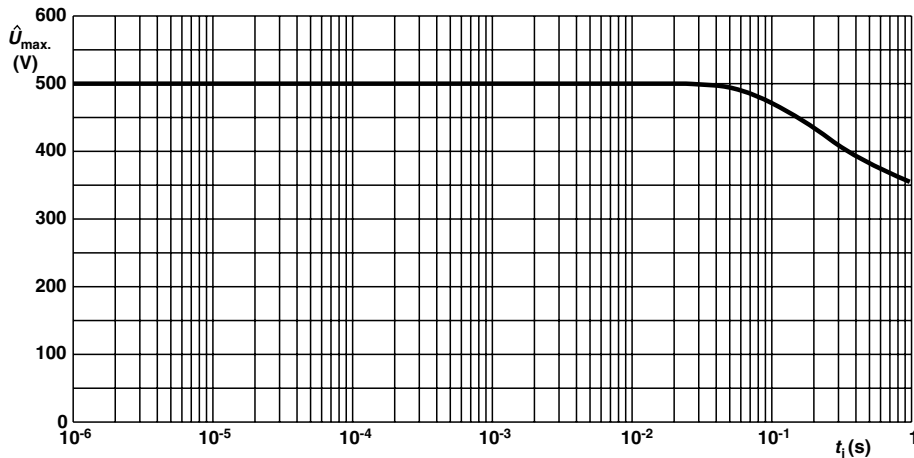

SFR25 Pulse on a regular basis; maximum permissible peak pulse voltage ($\hat{U}_{max.}$) as a function of pulse duration (t_i)

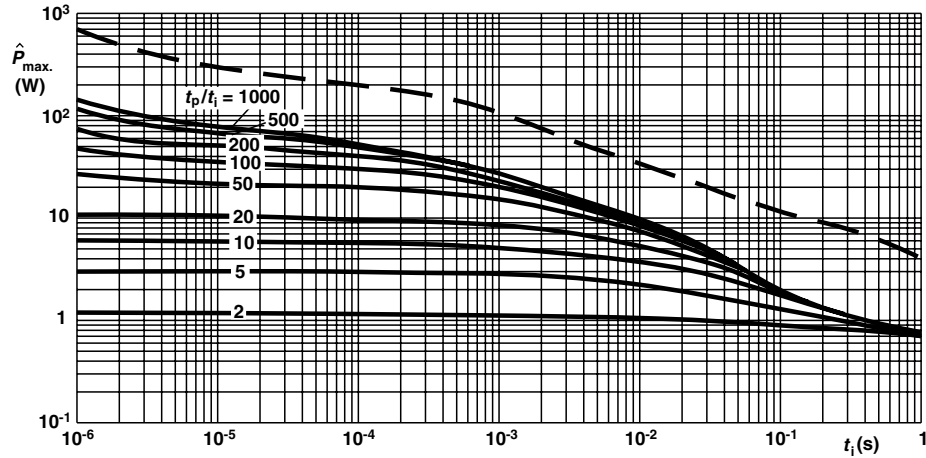


SFR25H Pulse on a regular basis; maximum permissible peak pulse power (\hat{P}_{max}) as a function of pulse duration (t_i)

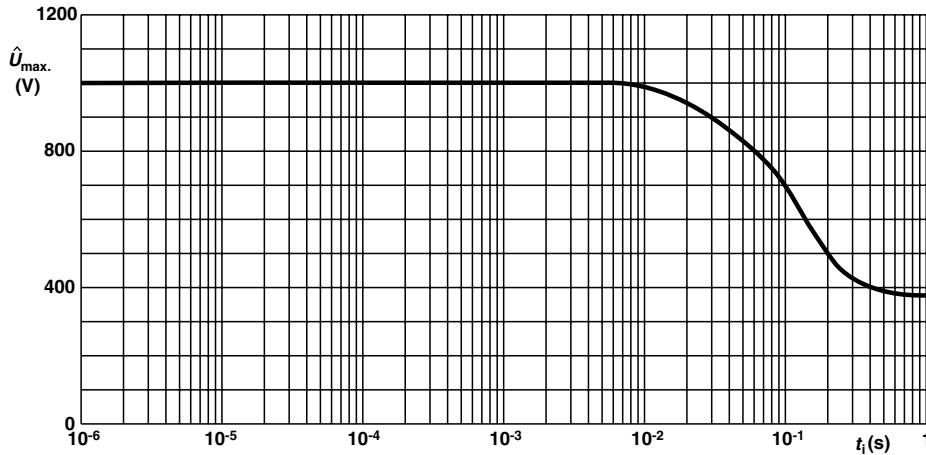


SFR25H Pulse on a regular basis; maximum permissible peak pulse voltage (\hat{U}_{max}) as a function of pulse duration (t_i)

Pulse Loading Capabilities

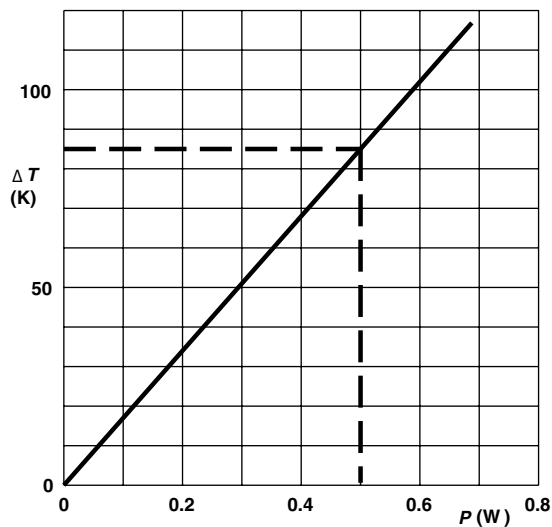

SFR16S Hot-spot temperature rise (ΔT) as a function of dissipated power

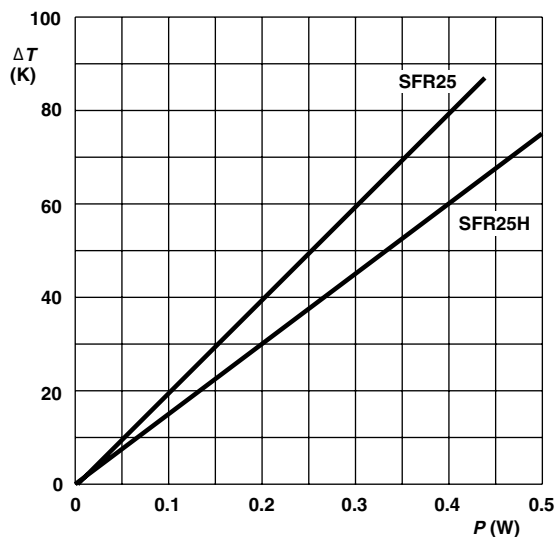

SFR25/SFR25H Hot-spot temperature rise (ΔT) as a function of dissipated power

Note

- The maximum permissible hot-spot temperature is 155 °C.

Application Information

TESTS AND REQUIREMENTS

Essentially all tests are carried out in accordance with IEC 60115-1 specification, category LCT/UCT/56 (rated temperature range: Lower Category Temperature, Upper Category temperature; damp heat, long term, 56 days).

The tests are carried out in accordance with IEC 60068-2-xx test method under standard atmospheric conditions according to IEC 60068-1, 5.3.

In the Test Procedures and Requirements table, tests and requirements are listed with reference to the relevant clauses of IEC 60115-1 and IEC 60068-2-xx test methods. A short description of the test procedure is also given. In some instances deviations from the IEC recommendations were necessary for our method of specifying. All soldering tests are performed with mildly activated flux.

TEST PROCEDURES AND REQUIREMENTS							
IEC 60115-1 CLAUSE	IEC 60068-2-TEST METHOD	TEST	PROCEDURE	RESISTANCE RANGE	REQUIREMENTS		
					SFR16S	SFR25	SFR25H
4.16		Robustness of terminations:			Number of failures < 10×10^{-6} Number of failures < 10×10^{-6} No damage ΔR max.: $\pm (0.25 \% R + 0.05 \Omega)$		
4.16.2	21 (Ua1)	Tensile all samples	\varnothing 0.45 mm, load 5 N; 10 s \varnothing 0.58 mm, load 10 N; 10 s				
4.16.3	21 (Ub)	Bending half number of samples	\varnothing 0.45 mm, load 2.5 N; 4 x 90° \varnothing 0.58 mm, load 5 N; 4 x 90°				
4.16.4	21 (Uc)	Torsion other half of samples	3 x 360° in opposite directions				
4.17	20 (Ta)	Solderability	2 s; 235 °C: Solder bath method; SnPb40 3 s; 245 °C: Solder bath method; SnAg3Cu0.5		Good tinning ($\geq 95 \%$ covered); no damage		
		Solderability (after aging)	8 h steam or 16 h 155 °C; leads immersed 6 mm; for 2 s at 235 °C: Solder bath (SnPb40) for 3 s at 245 °C: Solder bath (SnAgCu0.5) method		Good tinning ($\geq 95 \%$ covered); no damage		
4.18	20 (Tb)	Resistance to soldering heat	Thermal shock: 10 s; 260 °C; 3 mm from body		ΔR max.: $\pm (0.25 \% R + 0.05 \Omega)$		
4.19	14 (Na)	Rapid change of temperature	30 min at - 55 °C and 30 min at + 155 °C; 5 cycles		ΔR max.: $\pm (0.25 \% R + 0.05 \Omega)$		
4.20	29 (Eb)	Bump	3 x 1500 bumps in 3 directions; 40 g		No damage ΔR max.: $\pm (0.25 \% R + 0.05 \Omega)$		
4.22	6 (Fc)	Vibration	Frequency 10 Hz to 500 Hz; displacement 1.5 mm or acceleration 10 g; 3 directions; total 6 h (3 x 2 h)		No damage ΔR max.: $\pm (0.25 \% R + 0.05 \Omega)$		
4.23	2 (Ba)	Climatic sequence:			R_{ins} min.: 1000 M Ω ΔR max.: $\pm (1 \% R + 0.05 \Omega)$ ΔR max.: $\pm (1 \% R + 0.05 \Omega)$		
4.23.2		Dry heat	16 h; 155 °C				
4.23.3	30 (Db)	Damp heat (accelerated) 1st cycle	24 h; 55 °C; 90 % to 100 % RH				
4.23.4	1 (Aa)	Cold	2 h; - 55 °C	$R \leq 1 M\Omega$			
4.23.5	13 (M)	Low air pressure	2 h; 8.5 kPa; 15 °C to 35 °C	$R > 1 M\Omega$			
4.23.6	30 (Db)	Damp heat (accelerated) remaining cycles	5 days; 55 °C; 95 % to 100 % RH		ΔR max.: $\pm (1 \% R + 0.05 \Omega)$		ΔR max. $\pm (2 \% R + 0.1 \Omega)$
4.24	78 (Cab)	Damp heat (steady state)	56 days; 40 °C; 90 % to 95 % RH; loaded with 0.01 P_{70} (Steps: 0 V to 100 V)		R_{ins} min.: 1000 M Ω ΔR max.: $\pm (2 \% R + 0.05 \Omega)$		

TEST PROCEDURES AND REQUIREMENTS							
IEC 60115-1 CLAUSE	IEC 60068-2- TEST METHOD	TEST	PROCEDURE	RESISTANCE RANGE	REQUIREMENTS		
					SFR16S	SFR25	SFR25H
4.25.1		Endurance (at 70 °C)	1000 h; loaded with P_{70} or $U_{max.}$; 1.5 h ON and 0.5 h OFF		ΔR max.: $\pm (2\% R + 0.05 \Omega)$		
4.8		Temperature coefficient	Between -55 °C and +155 °C	$R < 4.7 \Omega$ $R \leq 100 \text{ k}\Omega$ $R \leq 1 \text{ M}\Omega$ $R > 1 \text{ M}\Omega$	$\leq \pm 250 \text{ ppm/K}$ $\leq \pm 100 \text{ ppm/K}$ $\leq \pm 250 \text{ ppm/K}$ $\leq \pm 250 \text{ ppm/K}$	$\leq \pm 100 \text{ ppm/K}$ $\leq \pm 100 \text{ ppm/K}$ $\leq \pm 100 \text{ ppm/K}$ $\leq \pm 250 \text{ ppm/K}$	$\leq \pm 100 \text{ ppm/K}$ $\leq \pm 100 \text{ ppm/K}$ $\leq \pm 100 \text{ ppm/K}$ $\leq \pm 250 \text{ ppm/K}$
4.7		Voltage proof on insulation	$U_{RMS} = 400 \text{ V}$ (SFR16S) or $U_{RMS} = 600 \text{ V}$ (SFR25 and SFR25H); during 1 min; V-block method		No breakdown		
4.12		Noise	IEC 60195	$R < 68 \text{ k}\Omega$ $R \leq 100 \text{ k}\Omega$ $R \leq 1 \text{ M}\Omega$ $R > 1 \text{ M}\Omega$	max. 0.1 $\mu\text{V/V}$ max. 0.5 $\mu\text{V/V}$ max. 1.5 $\mu\text{V/V}$ max. 1.5 $\mu\text{V/V}$	max. 0.1 $\mu\text{V/V}$ max. 0.1 $\mu\text{V/V}$ max. 0.1 $\mu\text{V/V}$ max. 1.5 $\mu\text{V/V}$	max. 0.1 $\mu\text{V/V}$ max. 0.1 $\mu\text{V/V}$ max. 0.1 $\mu\text{V/V}$ max. 1.5 $\mu\text{V/V}$
4.6.1.1		Insulation resistance	$U_{max.}$ DC = 500 V during 1 min; V-block method		R_{ins} min.: 1000 M Ω		
4.13		Short time overload	Room temperature; dissipation $6.25 \times P_{70}$ (voltage not more than 2 x limiting voltage); 10 cycles; 5 s ON and 45 s OFF		ΔR max.: $\pm (0.25\% R + 0.05 \Omega)$		ΔR max.: $\pm (1\% R + 0.05 \Omega)$

12NC INFORMATION FOR HISTORICAL CODING REFERENCE

- The resistors have a 12-digit numeric code starting with 23.
- The subsequent 6 digits for 1 % or 7 digits for 5 % indicate the resistor type and packaging.
- The remaining digits indicate the resistance value:
 - The first 3 digits for 1 % or 2 digits for 5 % indicate the resistance value.
 - The last digit indicates the resistance decade.

Last Digit of 12NC for $\pm 5\%$ Tolerance

RESISTANCE DECADE	LAST DIGIT
0.10 Ω to 0.91 Ω	7
1 Ω to 9.1 Ω	8
10 Ω to 91 Ω	9
100 Ω to 910 Ω	1
1 k Ω to 9.1 k Ω	2
10 k Ω to 91 k Ω	3
100 k Ω to 910 k Ω	4
1 M Ω to 9.1 M Ω	5
= 10 M Ω	6

Last Digit of 12NC for $\pm 1\%$ Tolerance

RESISTANCE DECADE	LAST DIGIT
1 Ω to 9.76 Ω	8
10 Ω to 97.6 Ω	9
100 Ω to 976 Ω	1
1 k Ω to 9.76 k Ω	2
10 k Ω to 97.6 k Ω	3
100 k Ω to 976 k Ω	4
1 M Ω to 9.76 M Ω	5
= 10 M Ω	6

12NC Example

The 12NC of a SFR25 resistor, value 5600 $\Omega \pm 5\%$, taped on a bandolier of 5000 units in ammpack is: 2322 181 43562.



12NC - Resistor type and packaging					
TYPE	TOL.	23..			
		BANDOLIER IN AMMOPACK			BANDOLIER ON REEL
		RADIAL TAPED	STRAIGHT LEADS		STRAIGHT LEADS
		4000 units	1000 units	5000 units	5000 units
SFR16S	± 5 %	-	..22 187 73...	..22 187 53...	..06 187 23...
	± 1 %	-	-	..06 187 3...	..06 187 1....
	Jumper	-	-	..06 187 90013	..22 187 90346
SFR25	± 5 %	..06 184 03...	..22 181 53...	..22 181 43...	..22 181 63...
	± 1 %	-	-	..22 188 2...	..06 181 8....
	Jumper	-	..22 181 90018	..22 181 90019	..06 181 90011
SFR25H	± 5 %	..06 186 03...	..22 186 16...	..22 186 76...	..06 186 63...
	± 1 %	-	-	..22 186 3....	..06 186 8....



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [vishay](#) manufacturer:

Other Similar products are found below :

[M39006/22-0577H](#) [Y00892K49000BR13L](#) [M8340109M6801GGD03](#) [VS-MBRB1545CTPBF](#) [1KAB100E](#) [CRCW1210360RFKEA](#)
[VSMF4720-GS08](#) [CRCW04024021FRT7](#) [001789X](#) [LTO050FR0500JTE3](#) [CRCW0805348RFKEA](#) [LVR10R0200FE03](#)
[CRCW12063K30FKEAHP](#) [009923A](#) [CRCW2010331JR02](#) [CRCW25128K06FKEG](#) [CS6600552K000B8768](#) [M39003/01-2289](#) [M39003/01-2784](#) [M39006/25-0133](#) [M39006/25-0228](#) [M64W101KB40](#) [M64Z501KB40](#) [CW001R5000JS73](#) [CW0055R000JE12](#) [CW0056K800JB12](#)
[CW0106K000JE73](#) [672D826H075EK5C](#) [CWR06JC105KC](#) [CWR06NC475JC](#) [MAL219699001E3](#) [MCRL007035R00JHB00](#) [GBU4K-E3/51](#)
[GBU8M-E3/51](#) [PTF56100K00QYEK](#) [PTN0805H1502BBTR1K](#) [RCWL1210R130JNEA](#) [RH005220R0FE02](#) [RH005330R0FC02](#)
[RH010R0500FC02](#) [132B20103](#) [RH1007R000FJ01](#) [RH2503R500FE01](#) [RH254R220FS03](#) [RH-50-40R2-1%-C02](#) [134D336X9075C6](#)
[132B00301](#) [135D277X0025F6](#) [DG202BDY-T1-E3](#) [DG9426EDQ-T1-GE3](#)