


NPN-Si-Fototransistor mit V_{λ} Charakteristik
Silicon NPN Phototransistor with V_{λ} Characteristics
Lead (Pb) Free Product - RoHS Compliant

SFH 3710

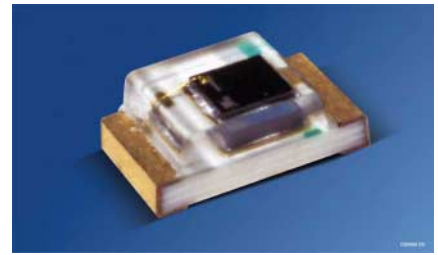

Wesentliche Merkmale

- Sehr kleines SMT Gehäuse
- Angepaßt an die Augenempfindlichkeit (V_{λ})

Features

- Very small SMT package
- Adapted to human eye sensitivity (V_{λ})

Anwendungen

- Umgebungslicht-Detektor
- Beleuchtungsmesser
- Dimmungssensor für Hintergrundbeleuchtung
- „Messen/Steuern/Regeln“

Applications

- Ambient light detector
- Exposure meter for daylight and artificial light
- Sensor for Backlight-Dimming
- For control and drive circuits

Typ Type	Bestellnummer Ordering Code	Fotostrom , $E_e = 10 \mu\text{W}/\text{cm}^2$, $\lambda = 560 \text{ nm}$, $V_{\text{CE}} = 5 \text{ V}$ Photocurrent $I_{\text{pce}} (\mu\text{A})$
SFH 3710	Q65110A3107	2.5...12.5
SFH 3710-2/3	Q65110A3512	2.5...8.0
SFH 3710-3/4	Q65110A3511	4.0...12.5

Einzelgruppen auf Anfrage / single bins on request

Grenzwerte ($T_A = 25\text{ °C}$)**Maximum Ratings**

Bezeichnung Parameter	Symbol Symbol	Wert Value	Einheit Unit
Betriebs- und Lagertemperatur Operating and storage temperature range	$T_{op}; T_{stg}$	- 40 ... + 85	°C
Kollektor-Emitterspannung Collector-emitter voltage	V_{CE}	5.5	V
Kollektorstrom Collector current	I_C	20	mA
Emitter-Kollektorspannung Emitter-collector voltage	V_{EC}	0.5	V

Kennwerte ($T_A = 25\text{ °C}$)**Characteristics**

Bezeichnung Parameter	Symbol Symbol	Wert Value	Einheit Unit
Wellenlänge der max. Fotoempfindlichkeit Wavelength of max. sensitivity	λ_{Smax}	570	nm
Spektraler Bereich der Fotoempfindlichkeit $S = 10\%$ von S_{max} Spectral range of sensitivity $S = 10\%$ of S_{max}	λ	350 ... 950	nm
Bestrahlungsempfindliche Fläche Radiant sensitive area	A	0.29	mm ²
Abmessung der Chipfläche Dimensions of chip area	$L \times B$ $L \times W$	0.75 × 0.75	mm × mm
Halbwinkel Half angle	φ	± 60	Grad. deg.
Kapazität, $V_{CE} = 0\text{ V}$, $f = 1\text{ MHz}$, $E = 0$ Capacitance	C_{CE}	4	pF
Dunkelstrom Dark current $V_R = 5\text{ V}$	I_{CEO}	3 (< 50)	nA
Temperturkoeffizient Temperature Coefficient Normlicht A / Standard Light A $\lambda = 550\text{ nm}$	TK $TK_{550\text{ nm}}$	0.9 0.78	%/K %/K

Kennwerte ($T_A = 25 \text{ }^\circ\text{C}$)

Characteristics


Bezeichnung Parameter	Symbol Symbol	Wert Value			Einheit Unit
		-2	-3	-4	
Fotostrom Photocurrent $E_e = 10 \text{ } \mu\text{W}/\text{cm}^2$, $\lambda = 560 \text{ nm}$, $V_{CE} = 5 \text{ V}$ $E_v = 1000 \text{ lx}$, Normlicht/Standard light A	I_{PCE}	2.5...5 220	4...8 350	6.3...12.5 570	μA μA
Kollektor-Emitter-Sättigungsspannung Collector-emitter saturation voltage $I_C = I_{PCEmin}^{1)} \times 0.3$, $E_e = 10 \text{ } \mu\text{W}/\text{cm}^2$, $\lambda = 560 \text{ nm}$	V_{CEsat}	100	100	100	mV

1) I_{PCEmin} ist der minimale Fotostrom der jeweiligen Gruppe

1) I_{PCEmin} is the min. photocurrent of the specified group


Relative Spectral Sensitivity

$S_{rel} = f(\lambda)$

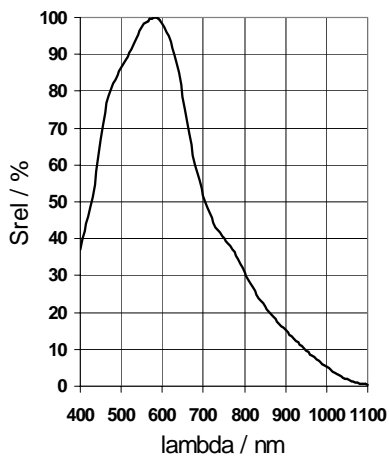


Photocurrent

$I_{PCE} = f(E_V), V_{CE} = 5 V$

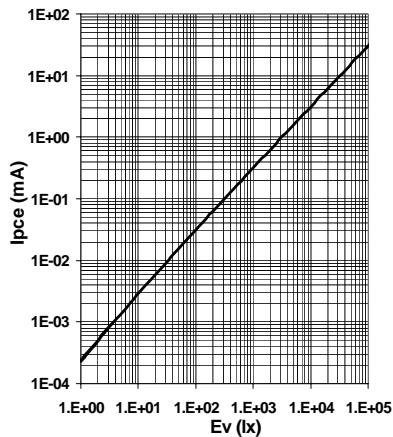


Photocurrent

$I_{PCE} = f(E_V), V_{CE} = 5 V$
normalized to 1000lx

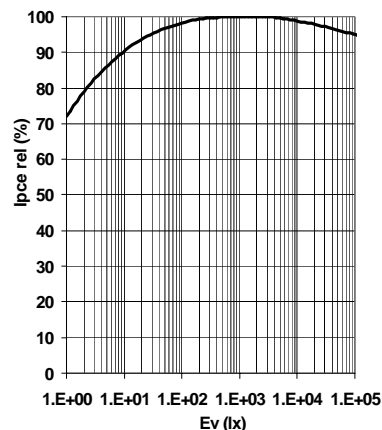


Collector-Emitter Capacitance

$C_{CE} = f(V_{CE})$

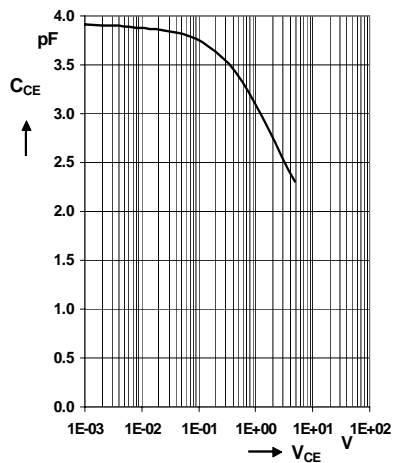


Directional Characteristics

$S_{rel} = f(\varphi)$

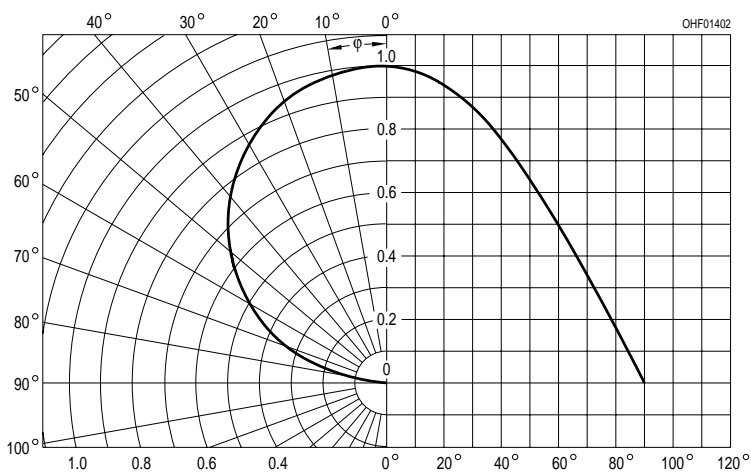


**Maßzeichnung
Package Outlines**

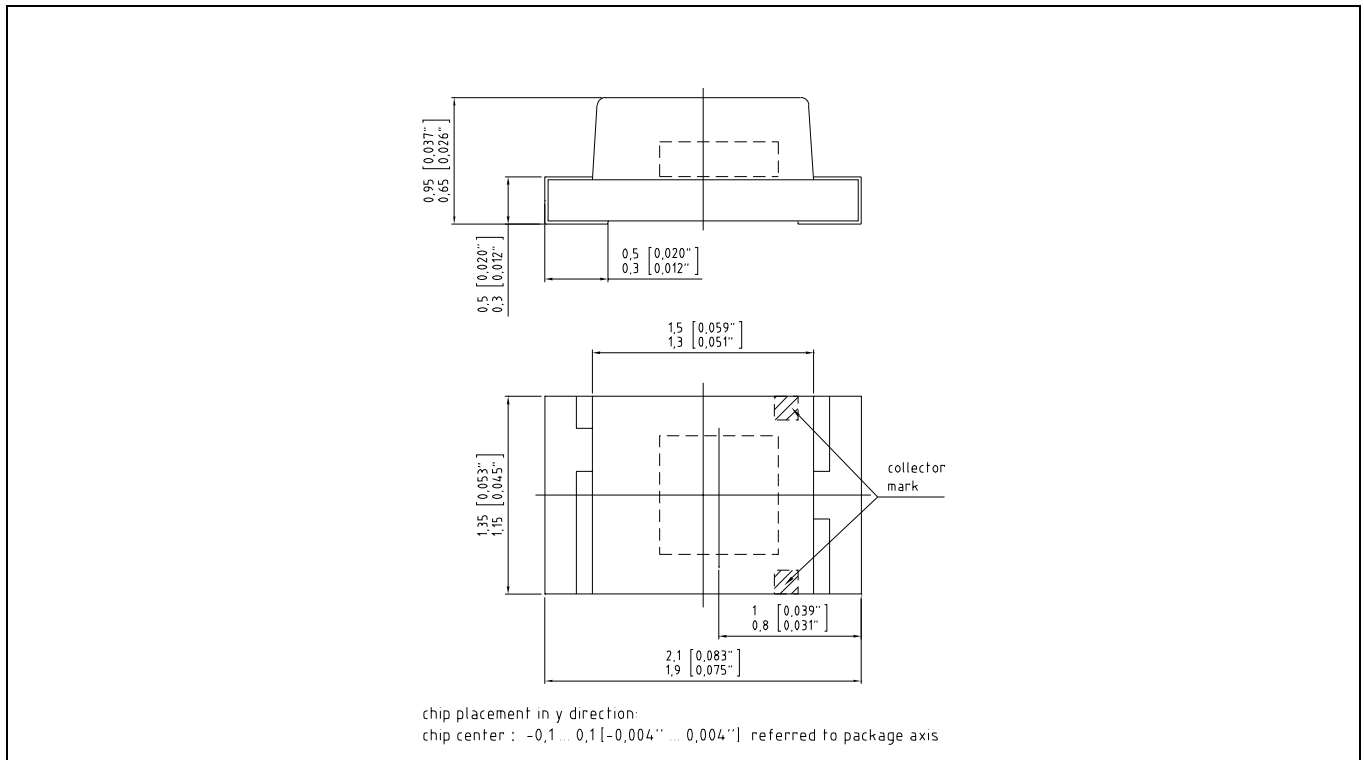

Maße in mm (inch) / Dimensions in mm (inch)


**Empfohlenes Lötpaddesign
Recommended Solderpad Design**

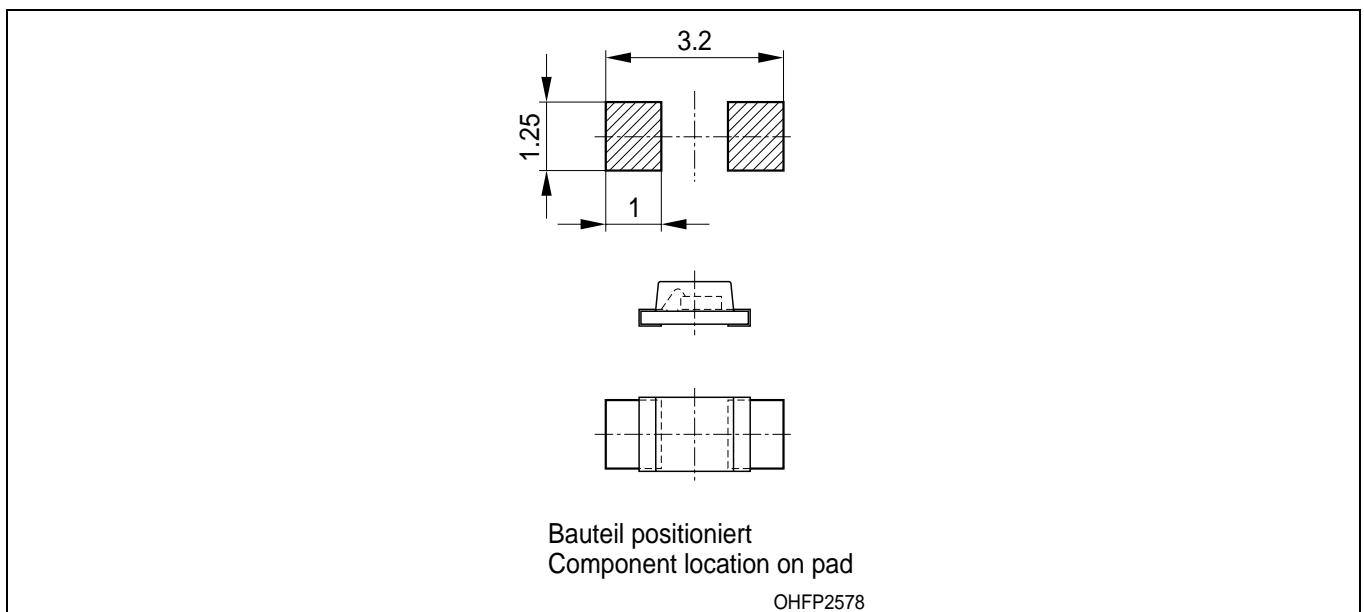

Maße in mm / Dimensions in mm

Lötbedingungen
Soldering Conditions
Reflow Lötprofil für bleifreies Löten
Reflow Soldering Profile for lead free soldering

Vorbehandlung nach JEDEC Level 2
 Preconditioning acc. to JEDEC Level 2
 (nach J-STD-020C)
 (acc. to J-STD-020C)

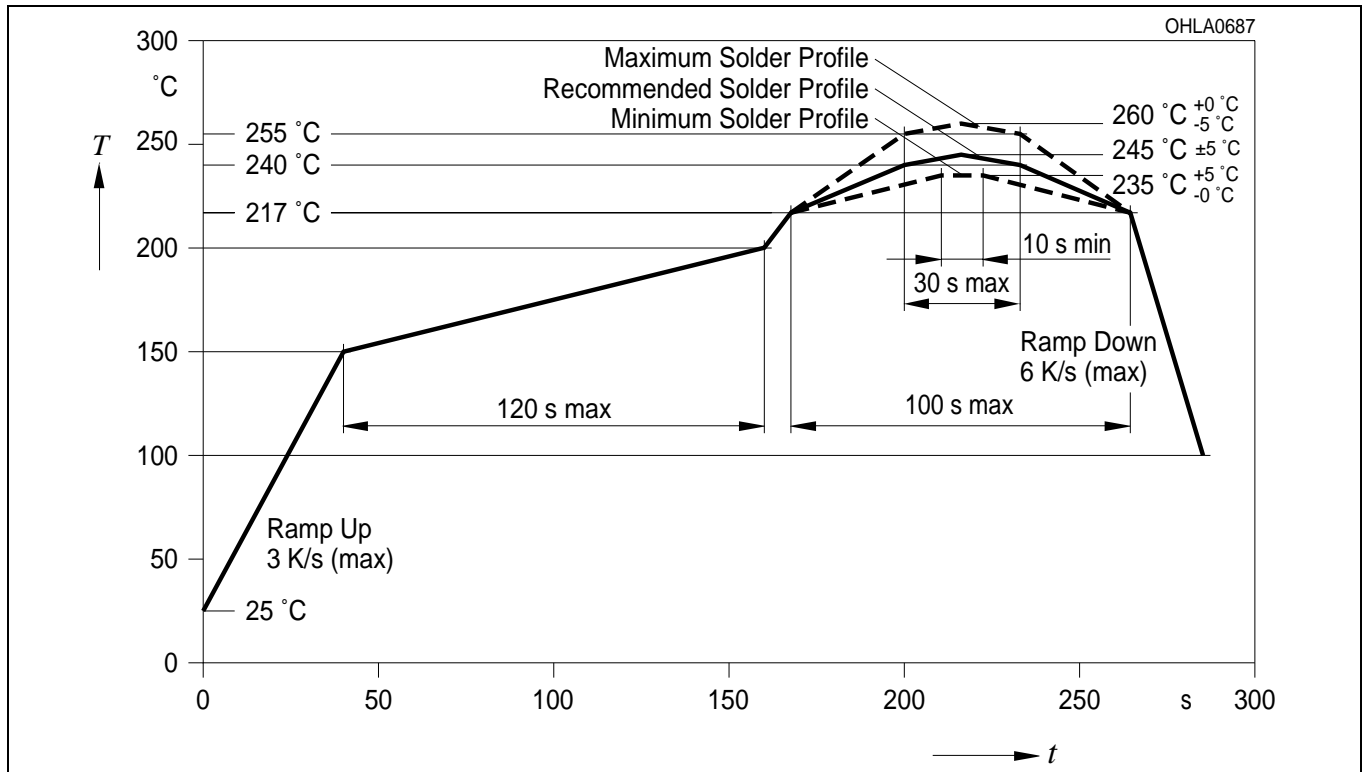

Published by
OSRAM Opto Semiconductors GmbH
 Wernerwerkstrasse 2, D-93049 Regensburg
www.osram-os.com
 © All Rights Reserved.

EU RoHS and China RoHS compliant product



此产品符合欧盟 RoHS 指令的要求；

按照中国的相关法规和标准，不含有毒有害物质或元素。

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances. For information on the types in question please contact our Sales Organization.

Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Components used in life-support devices or systems must be expressly authorized for such purpose! Critical components¹, may only be used in life-support devices or systems² with the express written approval of OSRAM OS.

¹ A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or effectiveness of that device or system.

² Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health of the user may be endangered.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [osram](#) manufacturer:

Other Similar products are found below :

[LS E65B-V1AB-1-1-50-R33-Z](#) [LO L296-Q2S1-24-Z](#) [IPD2131-27](#) [2351MFX6](#) [2352MFX6](#) [GW PSLPS1.EC-KSKU-5R8T-1](#) [418962A](#) [LCW](#)
[JNSH.PC-CPCR-5H7I-1](#) [LE RTDUW S2W](#) [LT A67C-S2U1-35](#) [4052899958128](#) [4052899958142](#) [4052899958173](#) [4052899971028](#)
[4052899971035](#) [4052899971042](#) [4052899971097](#) [BPW 34 BS](#) [BPW 34 FASR](#) [BPW 34 FSR](#) [BPW 34 SR](#) [LT A67C-T2V1-35](#) [GY](#)
[CSHPM1.23-KQKS-36-0](#) [4052899971011](#) [KW H5L531.TE-Z7R7-EBVFFCBB46-RS5R](#) [4058075097421](#) [79675](#) [79632](#) [OT 40/220-240/24](#)
[DIM P](#) [OT 60/220-240/24](#) [DIM P](#) [OT 100/220-240/24](#) [DIM P](#) [OT FIT 45/220-240/200 D L](#) [KW2 HIL532.TK-D2D9-4L07M0-SC6B](#) [LW](#)
[TWTG.BB-BXCX-2B2C-1](#) [LA E6SF-BBCB-24-1-Z](#) [HDSP2112S](#) [LY E6SF-AABA-46-1-Z](#) [64760](#) [SFH 4715A-CBDA](#) [SFH 4715AS A01](#)
[4058075097360](#) [4058075097544](#) [47659](#) [OT 6/200-240/24 CE](#) [OT FIT 35/220-240/350 D CS L](#) [OT FIT 8/220-240/180 CS S MINI](#) [64150ULT](#)
[79366](#) [4052899917583](#) [GW CSSRM2.PM-N3N5-XX51-1](#)