





## Features

- For switching and amplifier applications


**SOT-23-6**

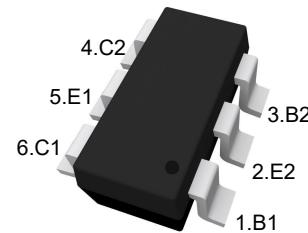

## Equivalent Circuit

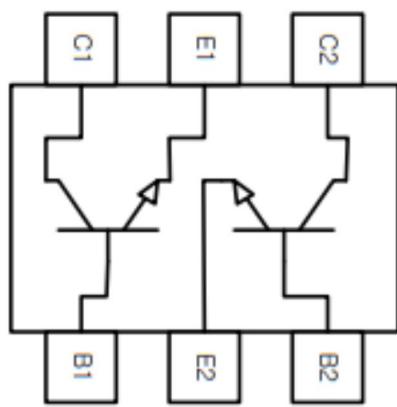

## Marking Code

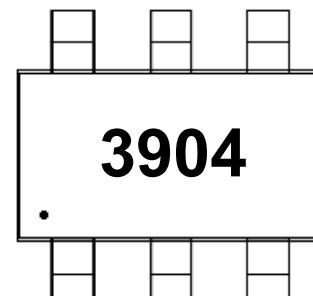

## Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Collector Base Voltage	$V_{CBO}$	60	V
Collector Emitter Voltage	$V_{CEO}$	40	V
Emitter Base Voltage	$V_{EBO}$	6	V
Collector Current	$I_C$	200	mA
Maximum Power Dissipation	$P_D$	1	W
Junction Temperature	$T_J$	150	°C
Storage Temperature Range	$T_{STG}$	-55 to +150	°C










**Electrical Characteristics (TA=25°C)**

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at V <sub>CE</sub> = 1 V, I <sub>C</sub> = 0.1 mA	H <sub>FE</sub>	40	--	
at V <sub>CE</sub> = 1 V, I <sub>C</sub> = 1 mA		70	--	
at V <sub>CE</sub> = 1 V, I <sub>C</sub> = 10 mA		100	300	--
at V <sub>CE</sub> = 1 V, I <sub>C</sub> = 50 mA		60	--	
at V <sub>CE</sub> = 1 V, I <sub>C</sub> = 100 mA		30	--	
Collector Base Cutoff Current at V <sub>CB</sub> = 30V	I <sub>CBO</sub>	--	50	nA
Emitter Base Cutoff Current at V <sub>EB</sub> = 6 V	I <sub>EBO</sub>	--	50	nA
Collector Base Breakdown Voltage at I <sub>C</sub> = 10 μA	V <sub>(BR)CBO</sub>	60	--	V
Collector Emitter Breakdown Voltage at I <sub>C</sub> = 1 mA	V <sub>(BR)CEO</sub>	40	--	V
Emitter Base Breakdown Voltage at I <sub>E</sub> = 10 μA	V <sub>(BR)EBO</sub>	6	--	V
Collector Emitter Saturation Voltage at I <sub>C</sub> = 10 mA, I <sub>B</sub> = 1 mA at I <sub>C</sub> = 50 mA, I <sub>B</sub> = 5 mA	V <sub>CE(sat)</sub>	-- --	0.2 0.3	V
Base Emitter Saturation Voltage at I <sub>C</sub> = 10 mA, I <sub>B</sub> = 1 mA at I <sub>C</sub> = 50 mA, I <sub>B</sub> = 5 mA	V <sub>BE(sat)</sub>	0.65 --	0.85 0.95	V
Transition Frequency at V <sub>CE</sub> = 20 V, I <sub>C</sub> = 10 mA, f = 100 MHz	F <sub>T</sub>	300	--	MHz
Output Capacitance at V <sub>CB</sub> = 5 V, I <sub>E</sub> = 0, f = 1 MHz	C <sub>ob</sub>	--	4	pF



## Typical Characteristic Curves

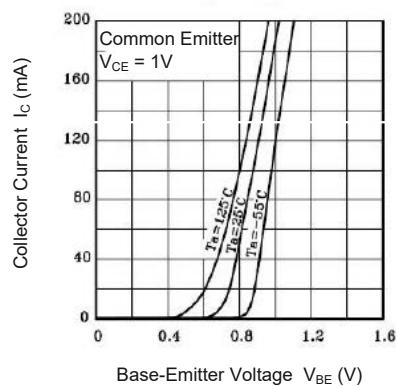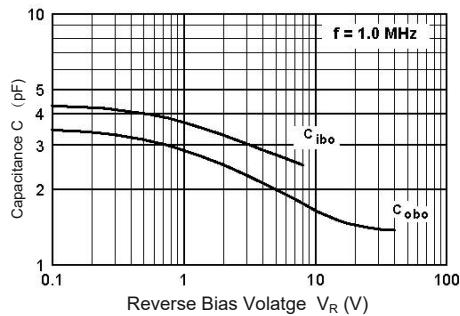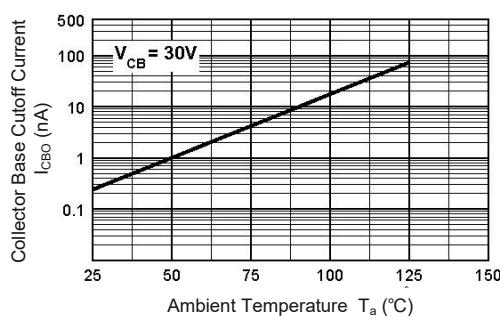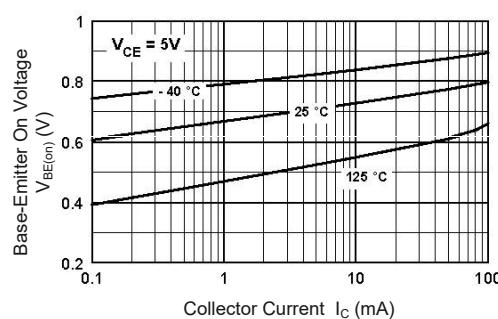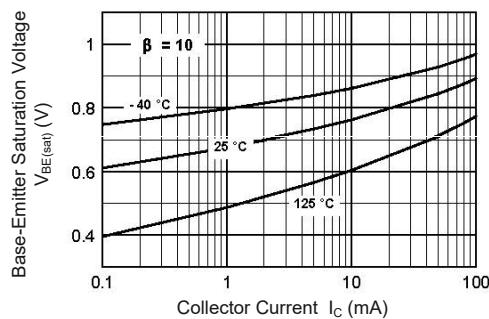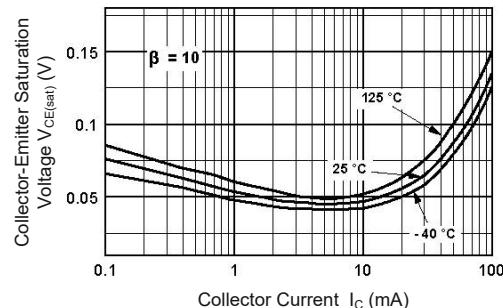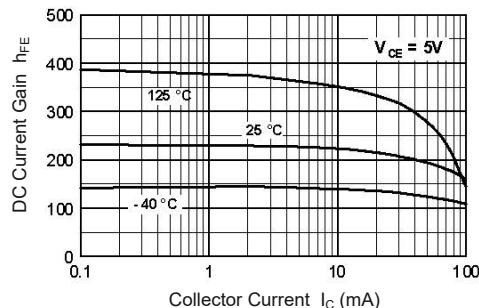




## Package Outline

SOT-23-6

Dimensions in mm

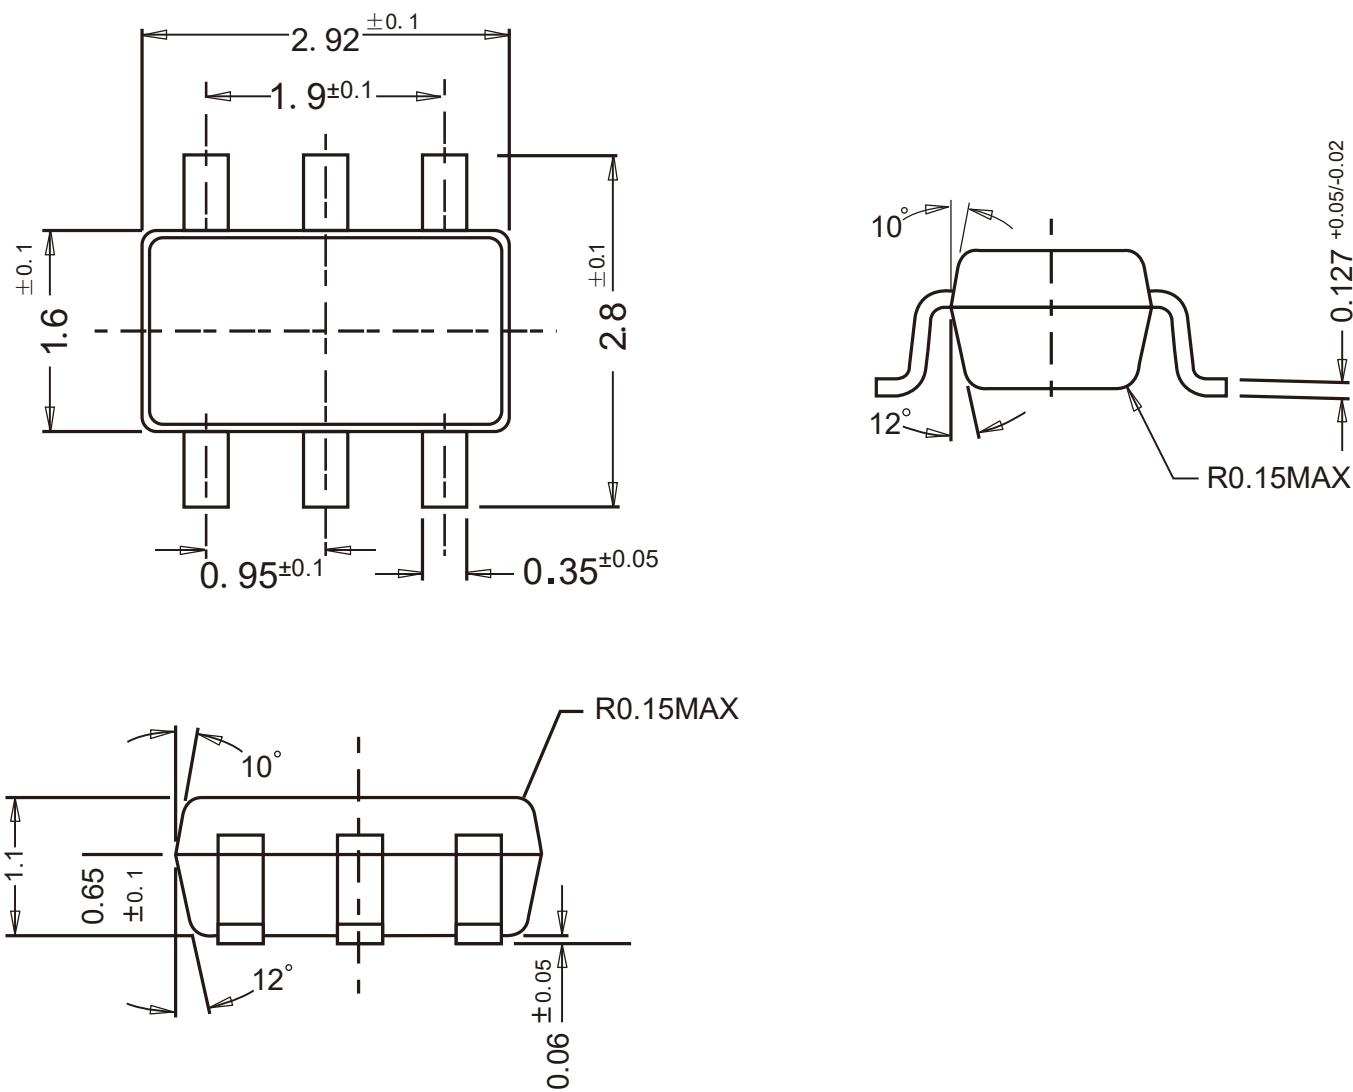


## Ordering Information

Device	Package	Shipping
MMDT3904SG	SOT-23-6	3,000PCS/Reel&7inches

## Conditions of Soldering and Storage

### ◆ Recommended condition of reflow soldering

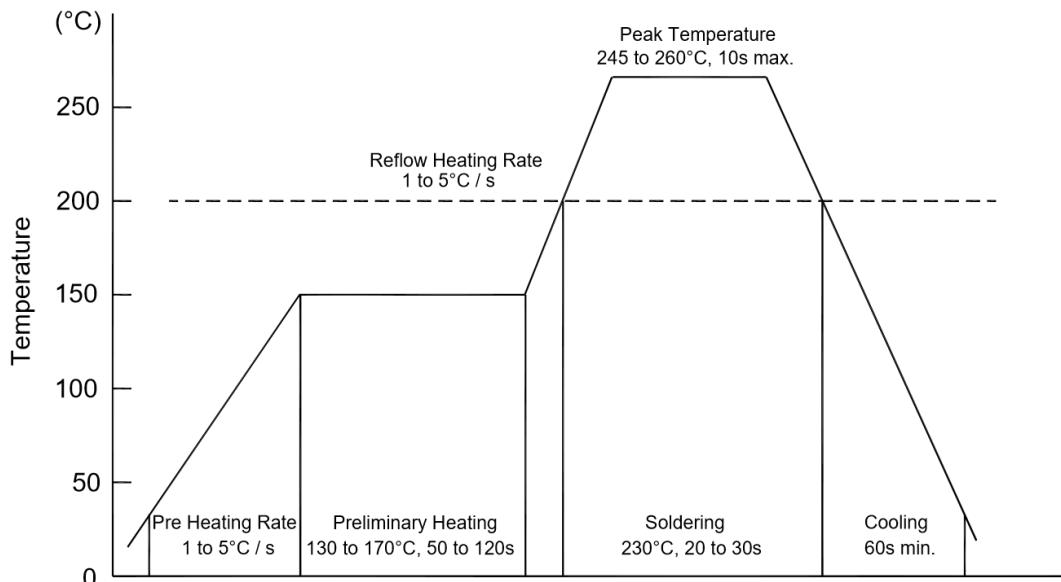

Recommended peak temperature is over 245 °C. If peak temperature is below 245 °C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

### ◆ Conditions of hand soldering

- Temperature: 370 °C
- Time: 3s max.
- Times: one time


### ◆ Storage conditions

- **Temperature**  
5 to 40 °C
- **Humidity**  
30 to 80% RH
- **Recommended period**  
One year after manufacturing




## Package Specifications

- The method of packaging

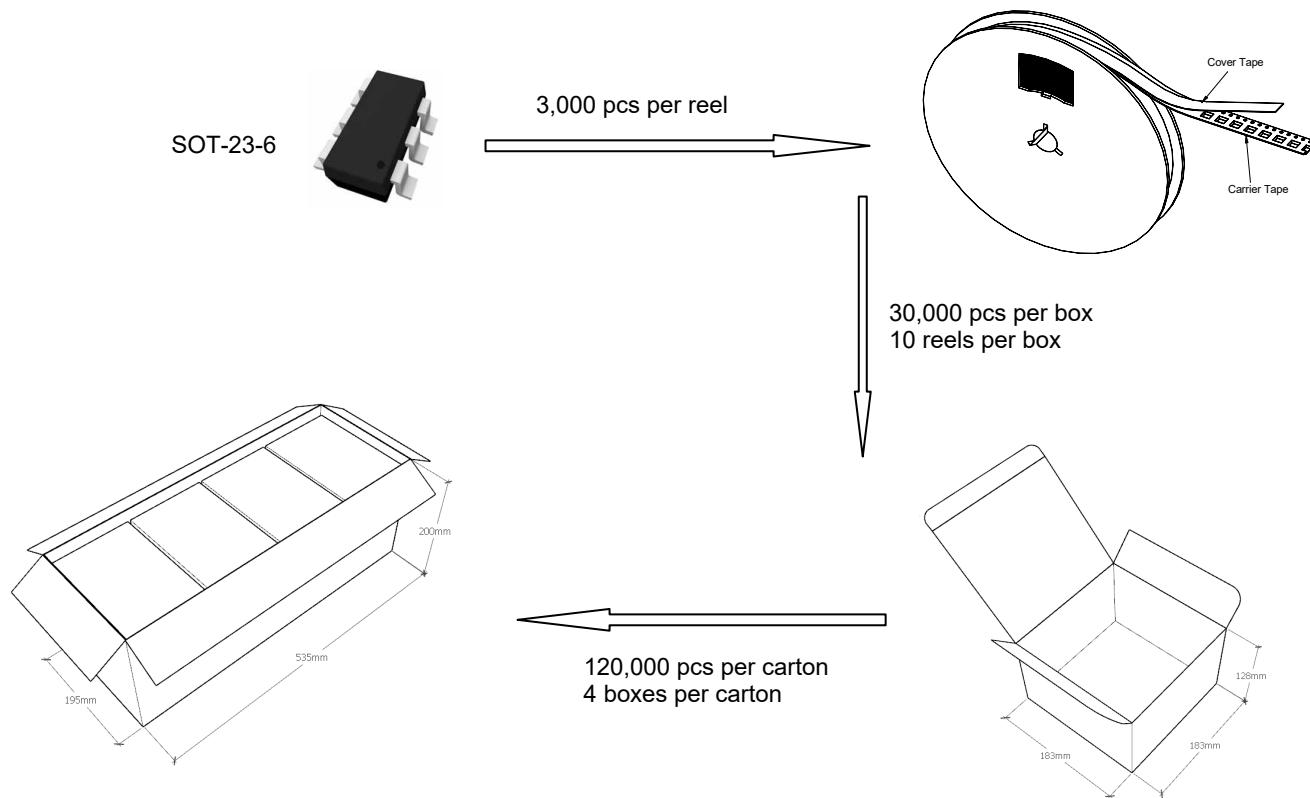


### ◆ Embossed tape and reel data

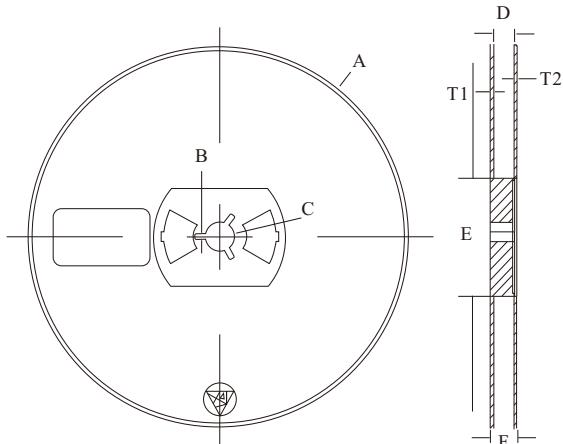

Symbol	Value (unit: mm)
A	$\varnothing 177.8 \pm 1$
B	$2.7 \pm 0.2$
C	$\varnothing 13.5 \pm 0.2$
E	$\varnothing 54.5 \pm 0.2$
F	$12.3 \pm 0.3$
D	$9.6 +2/-0.3$
T1	$1.0 \pm 0.2$
T2	$1.2 \pm 0.2$

Reel (7")

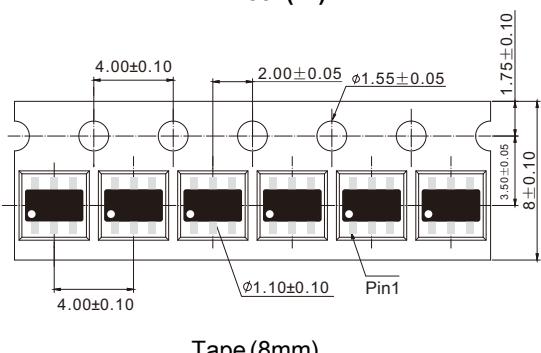

Tape (8mm)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by Pingjingsemi manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)  
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [SP000011176](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC2412KT146S](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#)  
[CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [30A02MH-TL-E](#) [NTE13](#) [NTE26](#)  
[NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#) [JANTX2N2920L](#) [JANSR2N2222AUB](#) [CMLT3946EG TR](#) [2SA1371D-AE](#)