
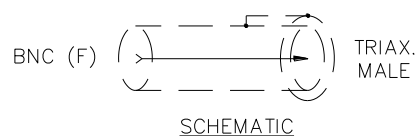


**Model 5090**  
**BNC (F) to 2 Lug Triaxial (M) Adapter**

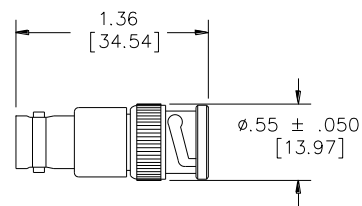

**Model 5090**  
**BNC (F) to 2 Lug Triaxial (M) Adapter**

**Features**

- Provides an easy interface between a BNC (F) and a 2 Lug Triax (M).

**Materials**

<i>Body:</i>	Brass, Tarnish Resistant Nickel Plated
<i>Dielectric:</i>	PTFE per L-P-403
<i>Center Contact:</i>	Male – Brass, Gold Plated Female – Beryllium Copper, Gold Plated
<i>Outer Contact:</i>	Beryllium Copper, Tarnish Resistant
<i>Marking:</i>	“POMONA 5090” (optional)

**Ratings**

**Voltage:** For *CE compliance* and for personal safety, do not hold in hand when voltages exceed 30 Vrms/60 Vdc.  
Maximum voltage for *hands free use* in controlled testing environments: 500 Vdc  
Do not use on circuits where transient stresses can exceed the rated voltage.

**Frequency Range:** DC to 500 MHz

**Ordering Information**

Model: 5090  
BNC (F)/2 LUG TRIAXIAL (M)

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844  
**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Adapters - Between Series](#) category:*

*Click to view products by [Pomona](#) manufacturer:*

Other Similar products are found below :

[5945-9503-000](#) [MCX/F-SMA/M](#) [R192417010](#) [ADBJ20-E1-BJ379](#) [ADM2](#) [ADPL75-A1-PL75](#) [242191](#) [9317505](#) [AD130](#) [ADBJ20-E1-PL74](#)  
[ADBJ77-E1-UPL20](#) [ADRMF370](#) [242190](#) [242215](#) [242228](#) [R125680000W](#) [R192430000](#) [UAD95](#) [1057367-1](#) [8311505](#) [R114704000](#)  
[R451034500](#) [R451030500](#) [R451543000](#) [HDVDPN](#) [ADBJ20-K1-PL20](#) [R451570000](#) [R192419000](#) [R451034000](#) [J9](#) [J3WE-5](#) [R451032500](#)  
[242201RP](#) [17K132-K00S5](#) [03K719-S22S3](#) [AD-RSMAF-RTNC](#) [53K156-K00N5](#) [53K160-KIMN1](#) [02K119-K00E3](#) [29S132-K01N5](#) [53S156-](#)  
[K00N5](#) [02S119-S00E3](#) [28K132-K00N5](#) [02S109-K00S3](#) [27-8200TP](#) [242235](#) [ADBJ20-E1-BJ89](#) [ADP-SMAF-MMCXM](#) [000-2900](#) [321-102-](#)  
[003 \(SMA-50/2-H155/W1.03 AU\)](#)