


## High Voltage Diode Module (TRACTION - PAC™)

PSTKD 82

$I_{FRMS} = 180 \text{ A}$   
 $I_{FAVM} = 82 \text{ A}$   
 $V_{RRM} = 600-1800 \text{ V}$

Preliminary Data Sheet

$V_{RSM}$ V	$V_{RRM}$ V	Type
700	600	PSTKD 82/06
900	800	PSTKD 82/08
1100	1000	PSTKD 82/10
1300	1200	PSTKD 82/12
1500	1400	PSTKD 82/14
1700	1600	PSTKD 82/16
1900	1800	PSTKD 82/18



### Features

- International standard package, JEDEC TO-240 AA
- Direct Copper Bonded  $Al_2O_3$  -ceramic base plate
- Planar passivated chips
- Isolation voltage 3600 V~




### Applications

- Supplies for DC power equipment
- DC supply for PWM inverter
- Field supply for DC motors
- Battery DC power supplies

### Advantages

- Space and weight savings
- Simple mounting with two screws
- Improved temperature and power cycling
- Reduced protection circuits

### Dimensions in mm (1 mm = 0.0394")

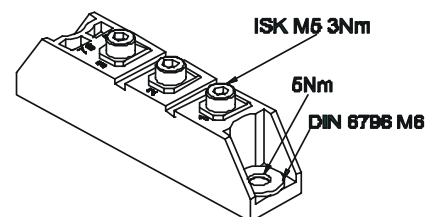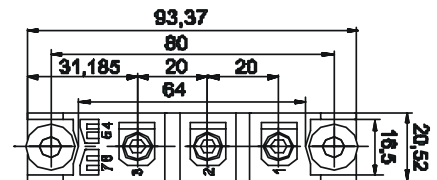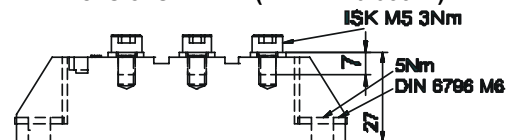

Symbol	Test Conditions	Maximum Ratings	
$I_{FRMS}$ $I_{FAVM}$	$T_{VJ} = T_{VJM}$ $T_C = 110^\circ\text{C}$ ; 180° sine	180	A
		82	A
$I_{TSM}$	$T_{VJ} = 45^\circ\text{C}$ ; $V_R = 0$	t = 10 ms (50 Hz)	1700 A
		t = 8.3 ms (60 Hz)	1950 A
	$T_{VJ} = T_{VJM}$ $V_R = 0$	t = 10 ms (50 Hz)	1530 A
		t = 8.3 ms (60 Hz)	1740 A
$di/dt$	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0$	t = 10 ms (50 Hz)	14450 A <sup>2</sup> s
		t = 8.3 ms (60 Hz)	15700 A <sup>2</sup> s
	$T_{VJ} = T_{VJM}$ $V_R = 0$	t = 10 ms (50 Hz)	11700 A <sup>2</sup> s
		t = 8.3 ms (60 Hz)	12500 A <sup>2</sup> s
$T_{VJ}$		-40 ... 125	°C
$T_{VJM}$		125	°C
$T_{stg}$		-40 ... 125	°C
$V_{ISOL}$	50/60 Hz, RMS t = 1 min	3000	V~
	$I_{ISOL} \leq 1 \text{ mA}$ t = 1 s	3600	V~
$M_d$	Mounting torque (M5)	5.0/44	Nm/lb.in.
	Terminal connection torque (ISK M5)	3.0/26	Nm/lb.in.
Weight	Typical including screws	56	g

Symbol	Test Conditions	Characteristic Values	
$I_{RRM}$ , $I_{DRM}$	$T_{VJ} = T_{VJM}$ ; $V_R = V_{RRM}$	15	mA
$V_T$	$I_T = 200 \text{ A}$ ; $T_{VJ} = 25^\circ\text{C}$	1.74	V
$V_{T0}$	For power-loss calculations only ( $T_{VJ} = T_{VJM}$ )	0.8	V
$r_T$	$T_{VJ} = T_{VJM}$	2.7	mΩ
$Q_S$	$T_{VJ} = 125^\circ\text{C}$ ; $I_F = 50 \text{ A}$ , $-di/dt = 3 \text{ A}/\mu\text{s}$	170	μC
$I_{RM}$		45	A
$R_{thJC}$	per diode; DC current	0.35	K/W
	per module	0.18	K/W
$R_{thJK}$	per diode; DC current	0.55	K/W
	per module	0.275	K/W
$d_s$	Creeping distance on surface	12.7	mm
$d_a$	Creepage distance in air	9.6	mm
$a$	Maximum allowable acceleration	50	m/s <sup>2</sup>

Data according to IEC 60747 and refer to a single thyristor/diode unless otherwise stated.

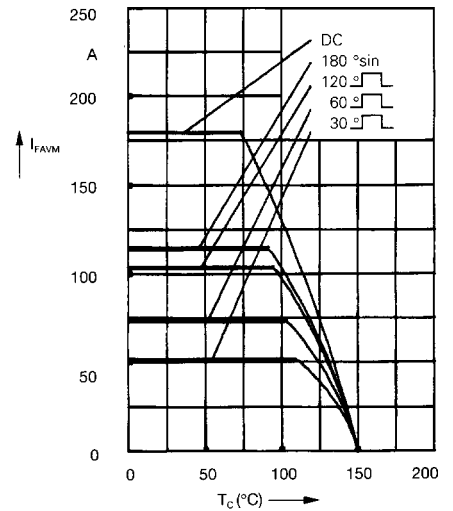
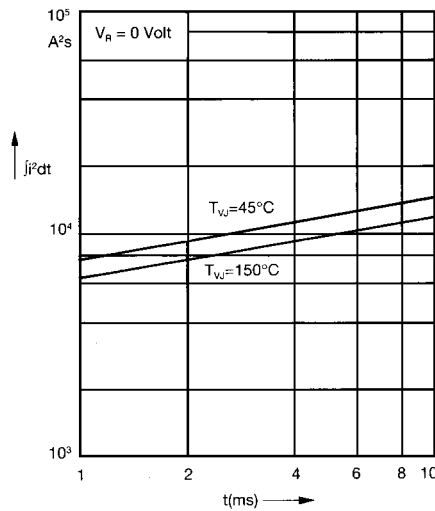
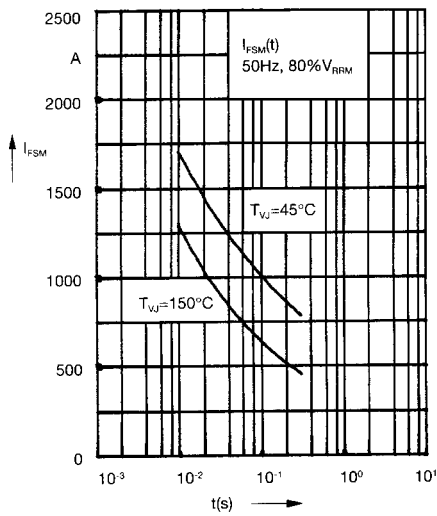


Fig. 1 Surge overload current  
 $I_{FSM}$ : Crest value,  $t$ : duration

Fig. 2  $\int i^2 dt$  versus time (1-10 ms)

Fig. 2a Maximum forward current at case temperature

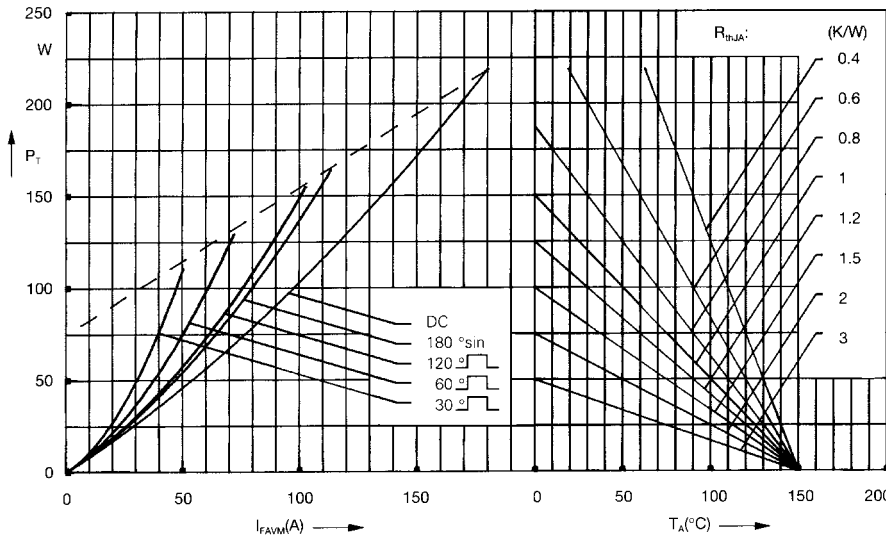


Fig. 3 Power dissipation versus forward current and ambient temperature (per diode)

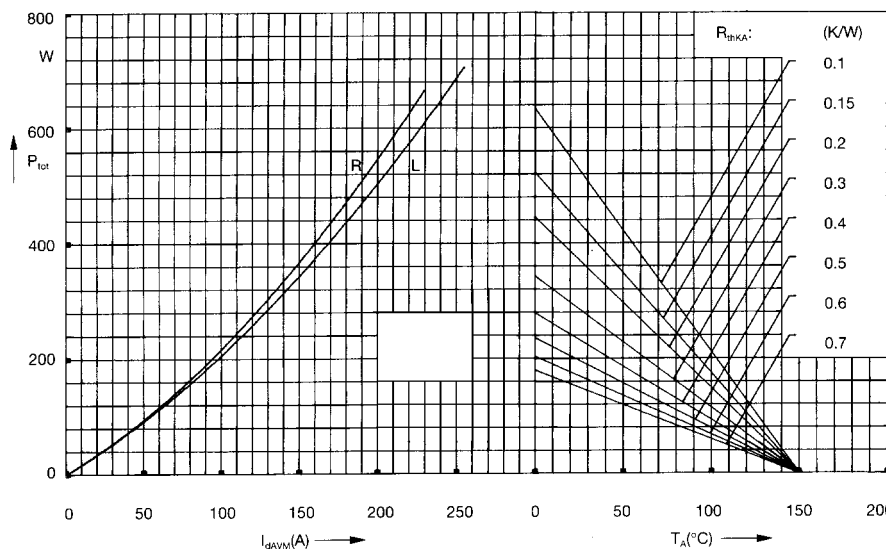


Fig. 4 Single phase rectifier bridge:  
 Power dissipation versus direct output current and ambient temperature  
 R = resistive load  
 L = inductive load

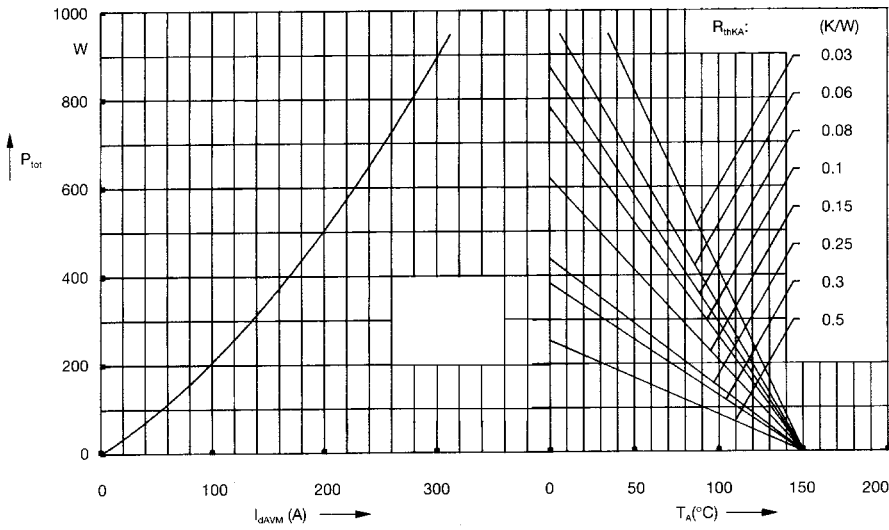


Fig. 5 Three phase rectifier bridge: Power dissipation versus direct output current and ambient temperature

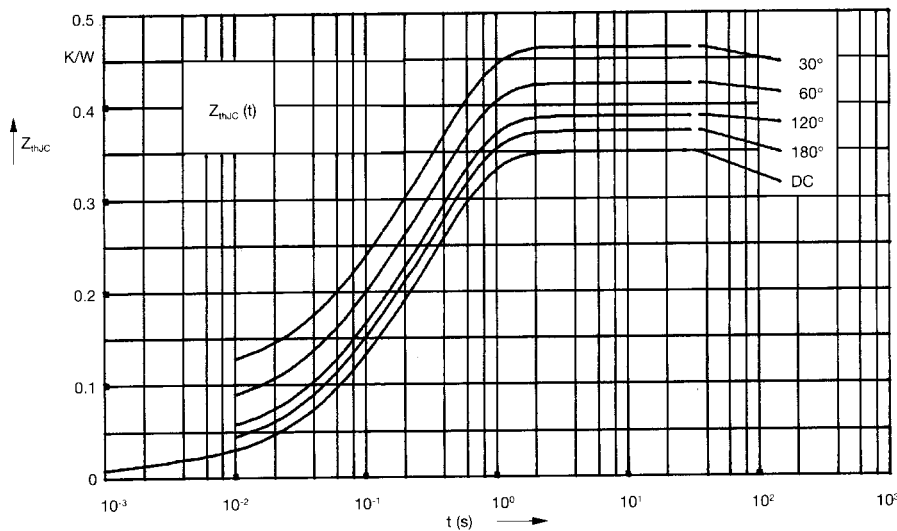


Fig. 6 Transient thermal impedance junction to case (per diode)

$R_{thJC}$  for various conduction angles d:

d	$R_{thJC}$ (K/W)
DC	0.35
180°	0.37
120°	0.39
60°	0.43
30°	0.47

Constants for  $Z_{thJC}$  calculation:

i	$R_{thi}$ (K/W)	$t_i$ (s)
1	0.013	0.0014
2	0.072	0.062
3	0.265	0.375

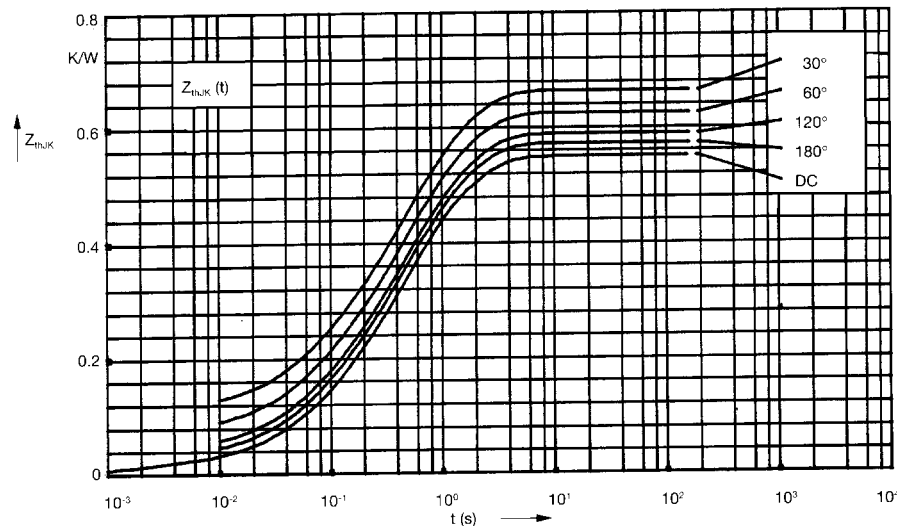


Fig. 7 Transient thermal impedance junction to heatsink (per diode)

$R_{thJK}$  for various conduction angles d:

d	$R_{thJK}$ (K/W)
DC	0.55
180°	0.57
120°	0.59
60°	0.63
30°	0.67

Constants for  $Z_{thJK}$  calculation:

i	$R_{thi}$ (K/W)	$t_i$ (s)
1	0.013	0.0014
2	0.072	0.062
3	0.265	0.375
4	0.2	1.32

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [Powersem](#) manufacturer:*

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)