SF-30 PM

SENSORE A FORCELLA

CARATTERISTICHE TECNICHE

Tensione di alimentazione:	10..30 Vcc con protezione contro l'inversione di polarità
Tensione di ripple:	2 Vpp max
Assorbimento:	55 mA max, esclusa corrente di uscita
Uscita:	PNP – NPN – luce – buio
Carico MAX.:	100 mA max.
Tempo di risposta:	200 µs
Tipo di emissione:	infrarossa 880 nm.
Limiti dell'oggetto rilevabile:	spessore max 2,5mm / larghezza min 1mm
Dimensioni di ingombro:	110 x 25 x 15 mm.
Materiale del contenitore	alluminio anodizzato con etichette in policarbonato
Connettore:	connettore M8 a 4 poli.
Indicatori:	Led di stato uscita, setup e allarmi.

PRINCIPALI FUNZIONI

· *Doppia modalità di autoregolazione*
· *Metodo di funzionamento luce / buio*
· *Ciclo di lettura alternato nel caso di oggetti che hanno al loro interno una zona più trasparente o vuota*

INGOMBRI E FORI DI FISSAGGIO

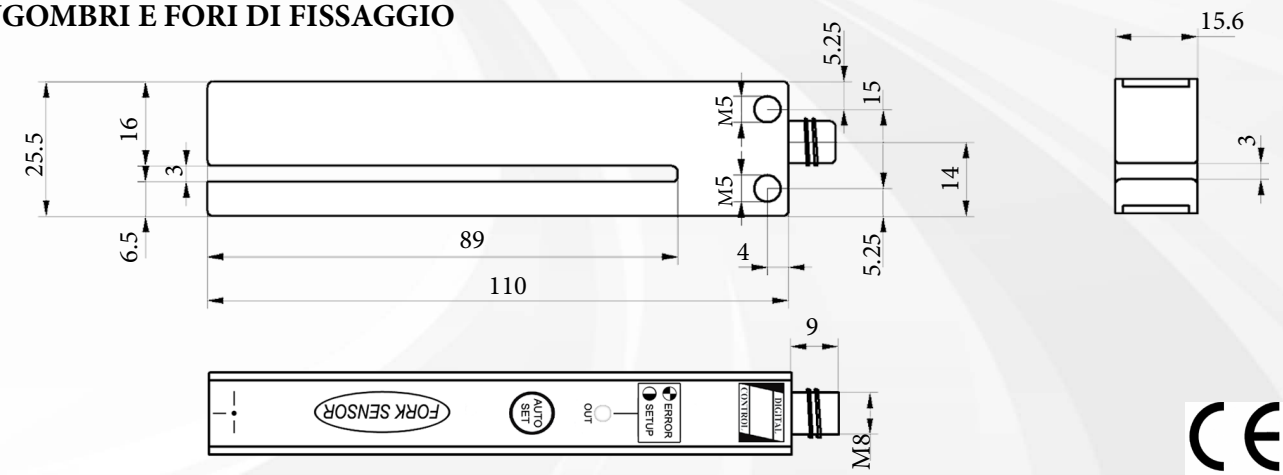

DIGITAL CONTROL S.r.l.

Reg. Leiso 113,C 14050 SAN MARZANO OLIVETO (AT) ITALY
Isc. al Reg. Imp. di Asti, C.F. e P.IVA: 01219490057 Cap. Soc. 12.000€ i.v.
TEL: +39.0141.856007 FAX: +39.0141.856821
E-mail: info@digitalcontrol.it Web: www.digitalcontrol.it

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for datasensor ***manufacturer:***

Other Similar products are found below :

S5-5-E1-30 S5-1C8-20 S50-PA-5-C01-PP S51-PA-2-A00-PK S51-PA-2-C10-PK S15-PA-2-A00-NK S5-5C35-30 S51-PA-2-A00-NK