


Surface mount transient voltage suppressor power 200 watts

Description

The SOD-123FL Series are designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

Unidirectional



Applications

TVS device are ideal for the protection of I/O interfaces, V_{CC} bus and other vulnerable circuits used in telecom, computer industrial and consumer electronic application

Feature

- For surface mounted applications in order to optimize board space.
- Low profile package
- Glass passivated junction
- Low inductance
- Plastic package has Underwriters Laboratory Flammability
- Excellent clamping capability
- Fast response time: typical less than 1.0 ps.
- from 0V to V_{BR} min
- 200W peak pulse power capability at 10/1000us waveform, Repetition rate (duty cycle): 0.01%
- 2200W peak pulse power capability at 8/20us waveform, Repetition rate (duty cycle): 0.01%

Absolute maximum rating@25°C

Rating	Symbol	Value	Units
Peak Pulse Power Dissipation on TA=25°C at 10/1000us (Note 1,2,5, Fig1)(Note 1,2,4, Fig1)	P _{PPM}	200	W
Peak Pulse Power Dissipation on TA=25°C at 8/20us	P _{PPM}	2200	W
Peak Forward Surge Current (Note 3)	I _{FSM}	20	A
Peak Pulse Current on 10/1000 us waveform (Note 1) Fig 2	I _{PPM}	see Table 1	A
Steady State Power Dissipation (Note 4)	P _{M(AV)}	1	W
Operating Junction and Storage Range	T _J , T _{stg}	±55 to ±150	°C
Typical Thermal Resistance	R _{θJA}	120	°C/W

Note :

- 1: Non-repetitive current pulse per Fig 3 and derated above TA=25°C per Fig 2
- 2: Mounted on 5mm² copper pads to each terminal
- 3: 8.3ms single half sinewave, or equivalent square wave duty cycle=4 pulses per minutes maximum
- 4: lead temperature at 75°C=TL
- 5: Peak pulse powe. waveform is tp=10/1000us
- 6: A transient suppressor is selected according to the working peak reverse voltage(V), WhiCh Should be RWM equal to or greater than the DC or continuous peak operating voltage level

Surface mount transient voltage suppressor power 200 watts

Electrical characteristics per line@25°C

Part Number	Reverse Stand off Voltage V_R (V)	Breakdown Voltage V_{BR} @ I_T (V)		Test Current I_T (mA)	Maximum Clamping Voltage V_C @ I_{PP} (V)	Maximum Peak Pulse Current I_{PP} (A)	Maximum Reverse Leakage I_R @ V_R (μ A)
		MIN	MAX				
PTVSHC1DF5VU	5	6.4	7	10	9.2	21.7	400
PTVSHC1DF6VU	6	6.7	7.4	10	10.3	19.4	400
PTVSHC1DF6V5U	6.5	7.2	8	10	11.2	17.9	250
PTVSHC1DF7VU	7	7.8	8.6	10	12	16.7	100
PTVSHC1DF7V5U	7.5	8.3	9.2	1	12.9	15.5	50
PTVSHC1DF8VU	8	8.9	9.8	1	13.6	14.7	25
PTVSHC1DF8V5U	8.5	9.4	10.4	1	14.4	13.9	10
PTVSHC1DF9VU	9	10	11.1	1	15.4	13	5
PTVSHC1DF10VU	10	11.1	12.3	1	17	11.8	2.5
PTVSHC1DF11VU	11	12.2	13.5	1	18.2	11	2.5
PTVSHC1DF13VU	13	14.4	15.9	1	21.5	9.3	1
PTVSHC1DF14VU	14	15.6	17.2	1	23.2	8.6	1
PTVSHC1DF16VU	16	17.8	19.7	1	26	7.7	1
PTVSHC1DF17VU	17	18.9	20.9	1	27.6	7.2	1
PTVSHC1DF20VU	20	22.2	24.5	1	32.4	6.2	1
PTVSHC1DF22VU	22	24.4	26.9	1	35.5	5.6	1
PTVSHC1DF26VU	26	28.9	31.9	1	42.1	4.8	1
PTVSHC1DF28VU	28	31.1	34.4	1	45.4	4.4	1
PTVSHC1DF30VU	30	33.3	36.8	1	48.4	4.1	1
PTVSHC1DF40VU	40	44.4	49.1	1	64.5	3.1	1
PTVSHC1DF43VU	43	47.8	52.8	1	69.4	2.9	1
PTVSHC1DF45VU	45	50	55.3	1	72.7	2.8	1
PTVSHC1DF48VU	48	53.3	58.9	1	77.4	2.6	1
PTVSHC1DF51VU	51	56.7	62.7	1	82.4	2.4	1
PTVSHC1DF54VU	54	60	66.3	1	87.1	2.3	1
PTVSHC1DF58VU	58	64.4	71.2	1	93.6	2.1	1
PTVSHC1DF60VU	60	66.7	73.7	1	96.8	1.8	1

Surface mount transient voltage suppressor power 200 watts

Part Number	Reverse Stand off Voltage V_R (V)	Breakdown Voltage V_{BR} @ I_T (V)		Test Current I_T (mA)	Maximum Clamping Voltage V_C @ I_{PP} (V)	Maximum Peak Pulse Current I_{PP} (A)	Maximum Reverse Leakage I_R @ V_R (μA)
		MIN	MAX				
PTVSHC1DF64VU	64	71.1	78.6	1	103	1.7	1
PTVSHC1DF70VU	70	77.8	86	1	113	1.5	1
PTVSHC1DF75VU	75	83.3	92.1	1	121	1.4	1
PTVSHC1DF78VU	78	86.7	95.8	1	126	1.4	1
PTVSHC1DF85VU	85	94.4	104	1	137	1.3	1
PTVSHC1DF90VU	90	100	111	1	146	1.2	1
PTVSHC1DF100VU	100	111	123	1	162	1.1	1
PTVSHC1DF110VU	110	122	135	1	177	1	1
PTVSHC1DF120VU	120	133	147	1	193	0.9	1
PTVSHC1DF130VU	130	144	159	1	209	0.8	1
PTVSHC1DF150VU	150	167	185	1	243	0.7	1
PTVSHC1DF160VU	160	178	197	1	259	0.7	1
PTVSHC1DF170VU	170	189	209	1	275	0.6	1
PTVSHC1DF175VU	175	198	214	1	284	0.6	1

Surface mount transient voltage suppressor power 200 watts

Typical Characteristics


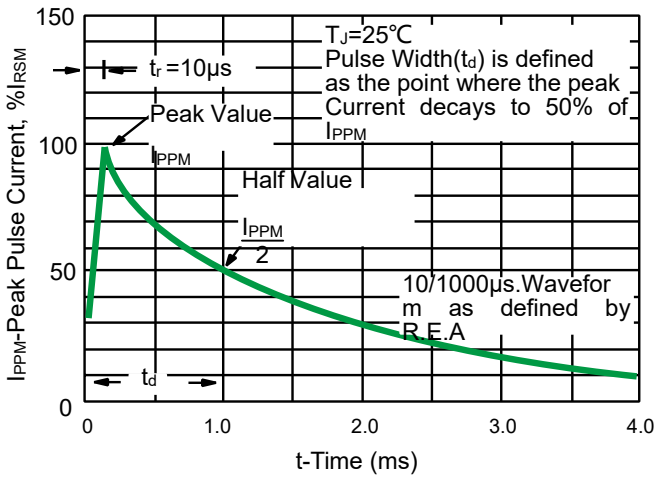


Fig 1. Pulse Waveform

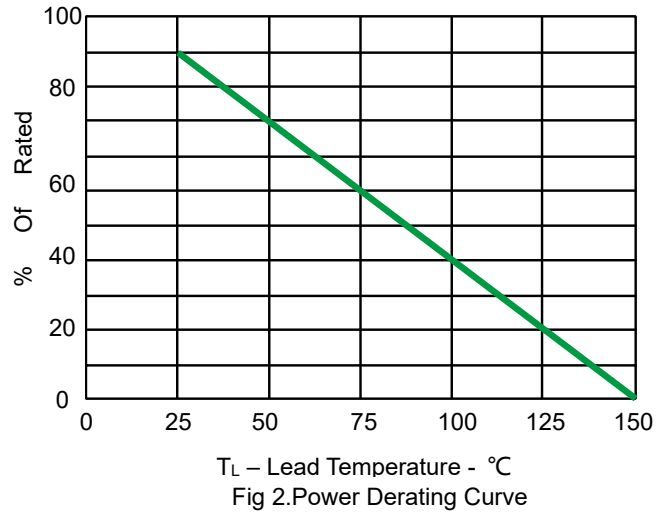

T_L - Lead Temperature - $^\circ C$
Fig 2. Power Derating Curve

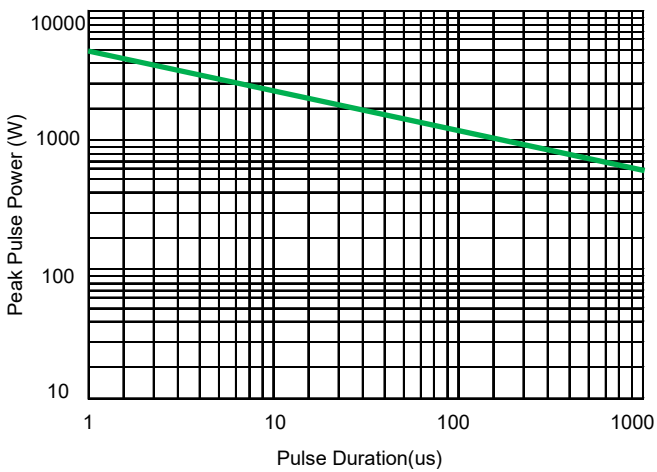


Fig 3. Non Repetitive Peak Pulse Power vs. Pulse time


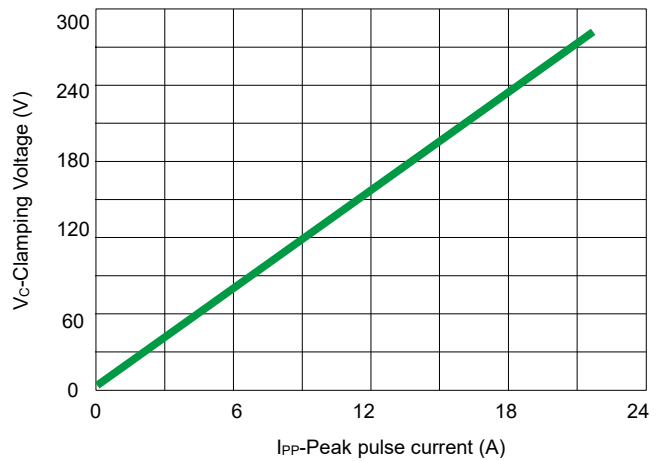


Fig 4. Clamping voltage vs. Peak pulse current

Surface mount transient voltage suppressor power 200 watts

Solder Reflow Recommendation

Peak Temp=257°C, Ramp Rate=0.802deg. °C/sec

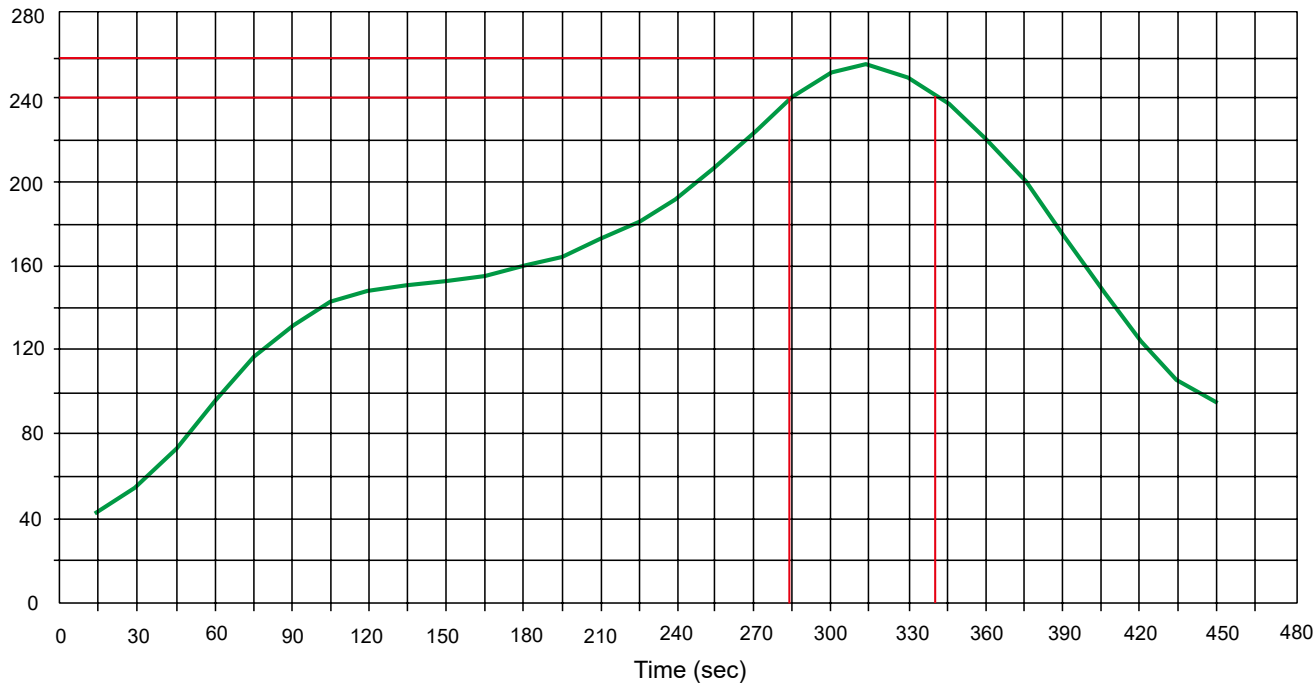


PCB Design

For TVS diodes a low-ohmic and low-inductive path to chassis earth is absolutely mandatory in order to achieve good ESD protection. Novices in the area of ESD protection should take following suggestions to heart:


- Do not use stubs, but place the cathode of the TVS diode directly on the signal trace.
- Do not make false economies and save copper for the ground connection.
- Place via holes to ground as close as possible to the anode of the TVS diode.
- Use as many via holes as possible for the ground connection.
- Keep the length of via holes in mind! The longer the more inductance they will have.

Surface mount transient voltage suppressor power 200 watts

Product dimension (SOD-123FL)

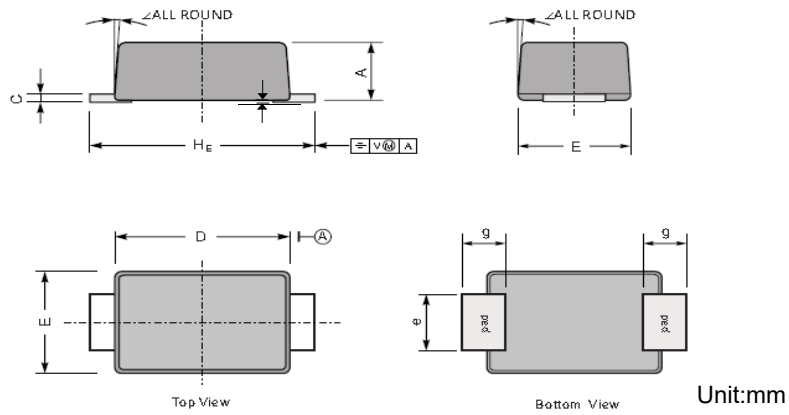

Dim	Inches		Millimeters	
	MIN	MAX	MIN	MAX
A	0.031	0.047	0.80	1.20
C	0.002	0.010	0.05	0.25
HE	0.138	0.154	3.50	3.90
E	0.061	0.077	1.55	1.95
D	0.098	0.114	2.50	2.90
g	0.020	0.043	0.50	1.10
e	0.024	0.039	0.60	1.00
k	0.004		0.10	
∠	7°			

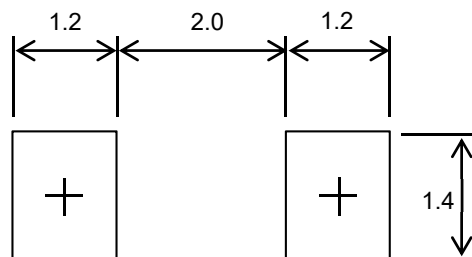


Suggested PCB Layout Unit:mm

Ordering information


Device	Package	Reel	Shipping
PTVSHC1DF5VU~175VU	SOD-123FL (Pb-Free)	7"	3000 / Tape & Reel

Surface mount transient voltage suppressor power 200 watts

Load with information

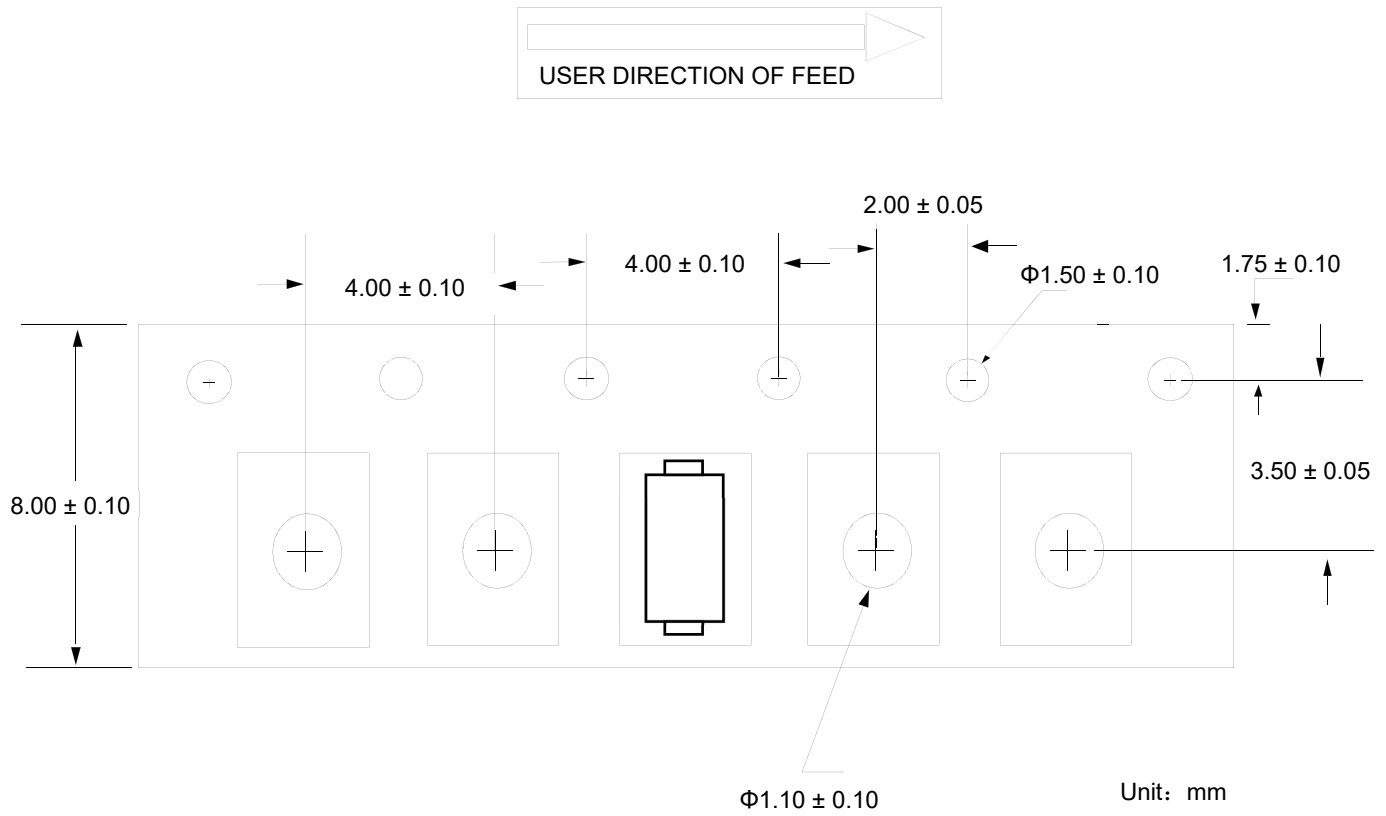


IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)** ,Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics

All rights are reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Prisemi](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)