



- Low Cost
- 12, 24 or 48V Outputs
- Wide Range AC Input
- Parallel Function Switch
- -40°C to +71°C Operation

Key Market Segments & Applications

Industrial Controls:	Motor Control Systems
Factory Automation:	Process Control, Automotive,
Test & Measurement:	Chemical Processing
	Burn in & Test,
	Instrumentation Measurement

DPP120 & 240 Series

120W & 240W Single Output DIN Rail Mount Power Supplies

DPP120 & 240 Features and Benefits

Features

- PFC Compliant to EN61000-3-2
- UL508 Approvals
- TS35/7.5 or TS35/15 DIN Rail Mounting

Benefits

- Supports Global Use
- Easier System Configuration
- Easy System Integration

Specifications

MODELS		DPP120	DPP240
ITEMS			
AC Input Voltage range	VAC	90 - 132/186-264VAC (auto select)	
Input Frequency	Hz	47 - 63Hz	
DC Input Voltage range	VDC	210 - 370VDC	
Inrush Current (115 / 230VAC)	A	24/48A	30/60A
Power Factor	-	typ 0.7 at 230VAC input	
Input Current (115/230VAC)	A	2.8/1.4A	5.4/2.2A
Output Voltage	V	12 , 24 or 48V	24 or 48V
Output Voltage Accuracy	%	-0, +1% of Nominal	
Line Regulation	%	±0.5%	
Load Regulation	%	±1% Single Mode ±5% Parallel Mode	
Ripple and Noise (20MHz BW)	mV	<50mV	<100mV
Overcurrent Protection (Typ)	-	120 - 145%	
Overvoltage Protection	V	120 - 145%	
Hold Up Time (230VAC input)	ms	>30 ms	
Efficiency (typ)	%	84 - 90% (see table)	
Parallel Operation (1)	-	Up to 3 units	
LED Indicators	-	Green LED = On, Red LED = DC Output Low	
DC Good Relay (24V model only)		-0.3A rated normally open relay contacts, closes when output is above 17.6 - 19.4V	
Operating Temperature	-	-40°C to +71°C (Derate linearly 2.5% per °C from 61°C to 71°C)	
Storage Temperature (2)	-	-40°C to +85°C	
Operating Humidity	-	20 - 95% RH (non condensing)	
Cooling (1)	-	Convection	
Withstand Voltage	-	Input to Output 3kVAC for 1 min.	
Isolation Resistance	Ω	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC	
Vibration (Operating)		IEC 60068-2-6 (Mounting by rail: Random wave, 10-500 Hz, 2G, ea. along X, Y, Z axes 10 min/cycle, 60 min)	
Shock (Operating)		IEC 60068-2-27 (Half sine wave, 4G, 22ms, 3 axes, 6 Faces, 3 times for each face)	
Safety Agency Approvals	-	UL508 Listed, UL60950-1, EN60950-1, CE	
Conducted & Radiated EMI	-	EN55022 class B	
Weight (Typ)	g	920	1000
Size (HxWxD)	mm	125 x 63.5 x 123.6	125 x 83 x 126
Case material	-	Metal	
Warranty	yrs	2	

Notes: (1) Recommend 1° clearance on all sides (2) DPP120 -35°C


Notes: (1) For parallel operations a minimum 10% load is required - loading conditions 0.1Io min to 0.9Io max

Model Selector					
Model	Voltage (V)	Voltage Adjust (V)	Current (A)	Power (W)	Effic. (typ) %
DPP120-12	12	11.4 - 14.5	10	120	84
DPP120-24	24	22.5 - 28.5	5	120	86
DPP120-48	48	45 - 55	2.5	120	87
DPP240-24	24	22.5 - 28.5	10	240	89
DPP240-48	48	47 - 56	5	240	90


For plug type connectors add suffix 'B' to part number

PIN Assignments	
Pin#	Function
1	DC Good Relay
2	DC Good Relay
3	V+
4	V+
5	V-
6	V-
7	GND
8	L
9	N

Outline Drawing DPP120

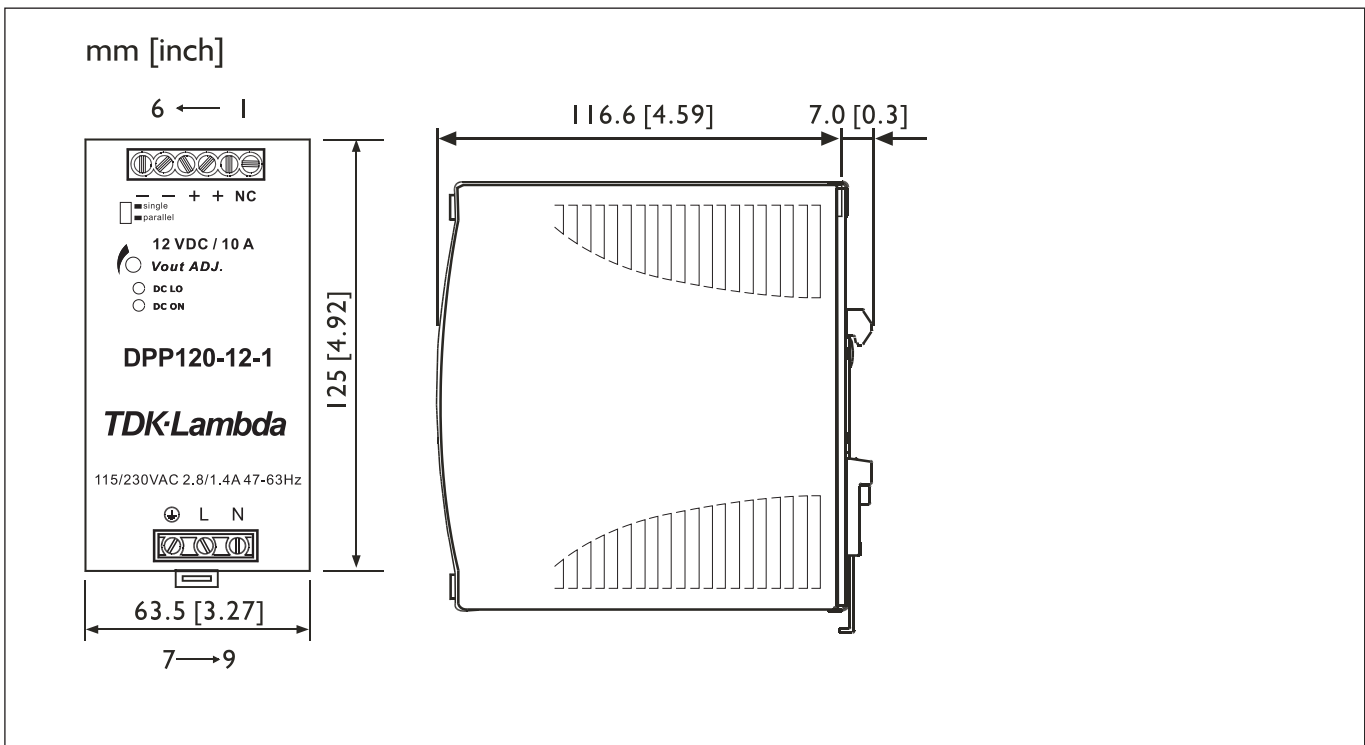

Outline Drawing DPP240

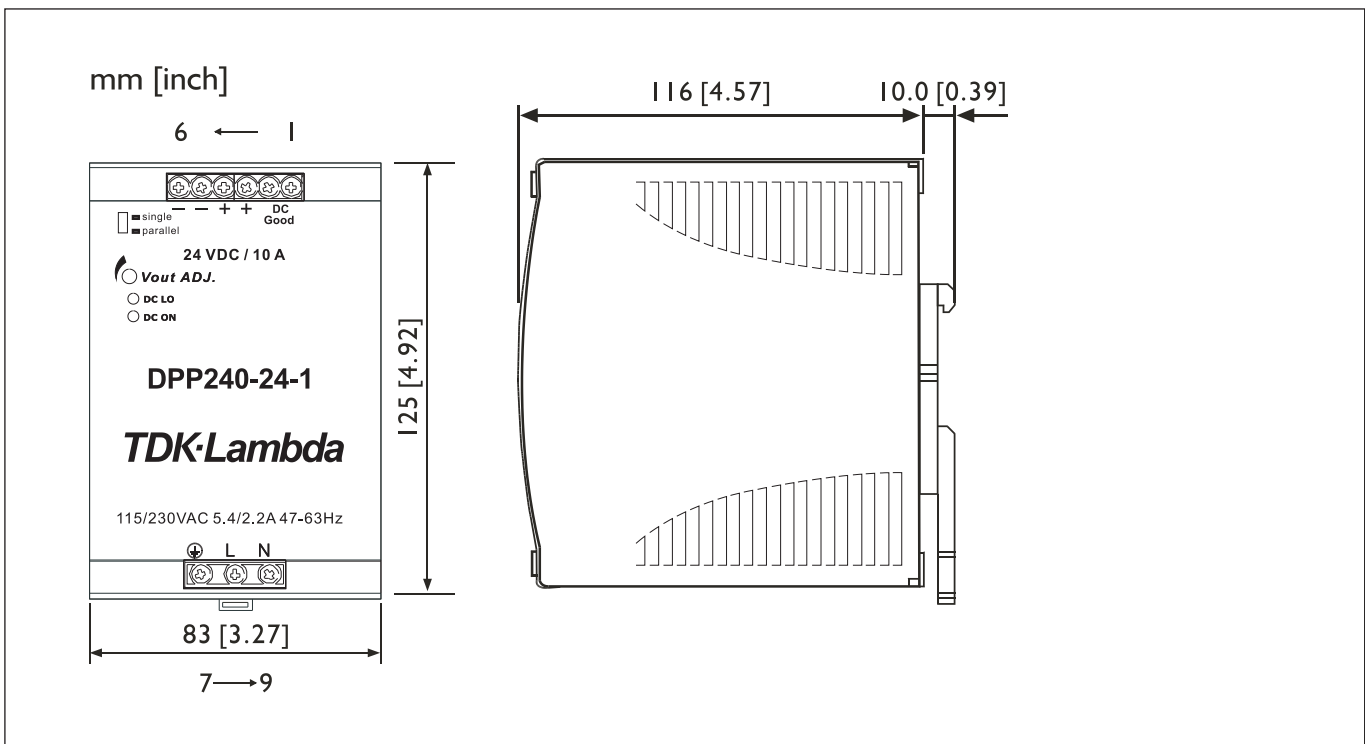

TDK-LAMBDA EMEA

www.emea.tdk-lambda.com



TDK-Lambda France SAS

Route de Grivery
ZAC des Delaches
CS 41077
91978 Courtaboeuf Cedex
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office
Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office
Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



Nemic Lambda Ltd.


Kibbutz
Givat Hashlosha 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@nemic.co.il
www.nemic.co.il



Russia

Technical Support:
St Petersburg
Tel: +7 (812) 6580463
Sales:
Moscow
Tel: +7 (499) 7557732
info@tdk-lambda.ru
www.tdk-lambda.ru

LOCAL DISTRIBUTION



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [tdk-lambda](#) manufacturer:

Other Similar products are found below :

[CSS500-57/S](#) [CUS200M18](#) [FPST1U](#) [PH150S110-15](#) [PH300S280-3.3](#) [PH50A280-48](#) [PH75A280-5](#) [PV1R5-12-5](#) [PV1R5-5-12](#) [PXA15-24WS3P3NT](#) [PXB15-24D05/N](#) [PXB15-48S12/NT](#) [PXB15-48WD15/N](#) [PXCM1048WD15A](#) [PXD1024WS15](#) [PXD1524D12](#) [PXD1524D15](#) [PXD1524S05](#) [PXD1524S12](#) [PXD1548D12](#) [PXD2024S3P3](#) [PXE2024WS12](#) [PXF4012D12](#) [PXF4024WD12](#) [PXF4048S05](#) [PXF4048T0515](#) [PXF4048WS15](#) [PXF6048S05](#) [GWS500-48](#) [HFE2500-S1U-TB](#) [DRJ30-12-1](#) [DRJ50-12-1](#) [DT100PW120C](#) [DT150PW480C](#) [DTM165PW150C](#) [1500-FAN-01](#) [MWS6515](#) [NL200](#) [HWS1000-12](#) [HWS1000-24](#) [HWS1000-48](#) [HWS1000-60](#) [HWS100A-24/A](#) [HWS100A-24/ADIN](#) [HWS100A3HD](#) [HWS100A48HD](#) [HWS100A-5](#) [HWS150036ME](#) [HWS150-12/ME](#) [HWS150A48HD](#)