


## C2268FNL

TRANSFORMER  
SURFACE MOUNT

NOTES: UNLESS OTHERWISE SPECIFIED





1. OPERATING TEMPERATURE: 0°C TO +70°C
2. STORAGE TEMPERATURE: -20°C TO +125°C
3. JEDEC MOISTURE: LEVEL 1.
4. DIMENSIONS ARE IN INCHES WITH THE FOLLOWING TOLERANCE:  
.XX= ±.01  
.XXX= ±.005
5. OPTIONAL TAPE & REEL PACKAGING CAN BE ORDERED BY ADDING A "T" SUFFIX TO THE PART NUMBER. ie: C2268FNLT
6. ROHS COMPLIANT



### ELECTRICAL SPECIFICATIONS: @ 25°C

PARAMETER	SPECIFICATIONS
URNS RATIO	1:1 ± 5%
POLARITY	PER SCHEMATIC
PRIMARY INDUCTANCE	7.5 uH MIN @100KHZ, .20 VRMS
LEAKAGE INDUCTANCE	.10 uH MAX @100KHZ, 20 mVRMS
C <sub>ww</sub>	5 PF MAX @100KHZ, 20 mVRMS
DC RESISTANCE	.20 OHMS MAX
HIPOT	1500 VRMS MIN @ 60 SECONDS

### MECHANICAL SPECIFICATIONS:

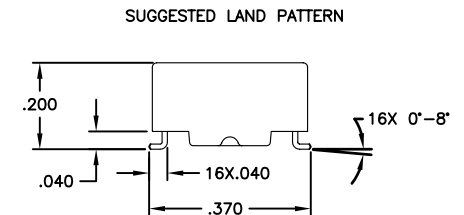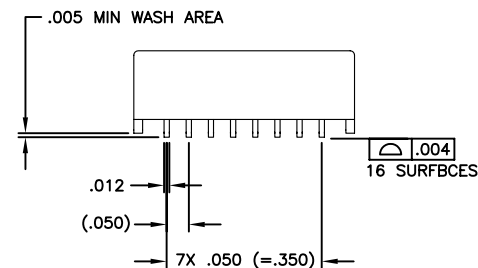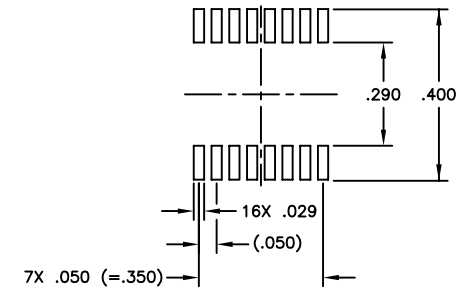

© Copyright, 2013. Pulse Engineering, Inc. All rights reserved. Drawing specifications subject to change without notice. Date (08/15/13)

PULSE CONFIDENTIAL  
&  
PROPRIETARY

PRODUCT SPECIFICATION:  
XFMR,FC,DUAL,1:1,75UH,OH,SM

DWG. NO./ PART NO.  
C2268FNL

SHEET:  
1

REV.  
MP1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:*

*Click to view products by [Pulse manufacturer](#):*

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5084FNLT](#)  
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#)  
[1879732-1](#) [2-1879391-5](#)