




Electrical

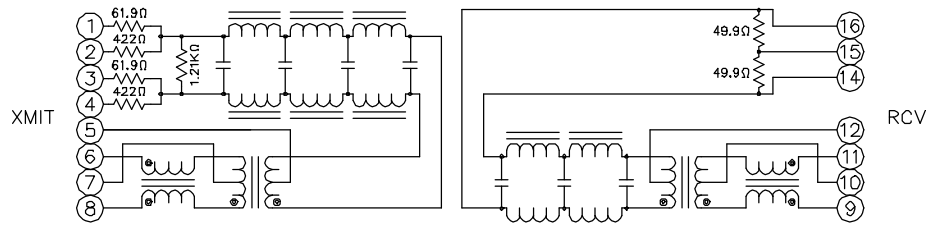

ELECTRICAL SPECIFICATIONS @ 25°C

TYPE	TRANSMITTER FILTER:	RECEIVER FILTER:
	: 7 POLE,	: 5 POLE,
	BALANCED LOW-PASS, 100Ω	BALANCED LOW-PASS, 100Ω
CUT-OFF FREQ	: 17MHz ± 1.0MHz	: 17MHz ± 1.0MHz
INSERTION LOSS	: 4.5dB MAX (1-10MHz)	: 1.0dB MAX (1-10MHz)
INPUT IMPEDANCE	: 200Ω	: 100Ω
* ATTENUATION @ 20MHz	: 7dB MIN	: 5dB MIN
@ 25MHz	: 18dB MIN	: 11dB MIN
@ 30MHz	: 30dB MIN	: 16dB MIN
@ 40MHz	: 33dB MIN	: 26dB MIN
ISOLATION	: 2000VRMS FOR 1 MINUTE	: 2000VRMS FOR 1 MINUTE
	(INPUT TO OUTPUT)	(INPUT TO OUTPUT)
	1,2,3,4, AND 5 TO 6,7, AND 8	12,14,15, AND 16 TO 9,10, AND 11
COMMON MODE REJECTION	: 30dB MIN (30-100MHz)	: 30dB MIN (30-100MHz)
RETURN LOSS	: 15dB MIN (5-10MHz)	: 15dB MIN (5-10MHz)
	TRANSMITTER TO RECEIVER CHARACTERISTICS	
CROSS TALK ATTEN	BETWEEN CHANNELS (1-10MHz) : 35dBs MIN	
HIPOUT 1,2,3,4,5 TO 9,10,11	: 200VRMS FOR 1 MINUTE	
1,2,3,4,5 TO 14,15,16		
6,7,8 TO 14,15,16		
REFERENCED TO FILTER OUTPUT @ 5.0MHz.		

Mechanical

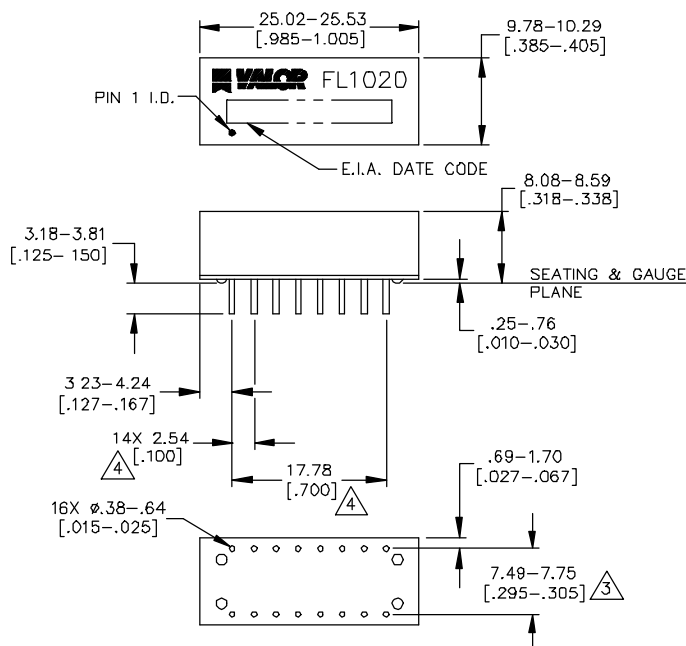

WEBSITE www.valorinc.com E-MAIL marketing@valorinc.com

NORTH AMERICA
tel 1-800-31 VALOR
fax 619-537-2525

ASIA/PACIFIC
tel +852-2953-1000
fax +852-2953-1333

EUROPE
tel +44-1727-824 875
fax +44-1727-824 898

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pulse manufacturer](#):

Other Similar products are found below :

[ICEFIN806DMN](#) [ICEFIN698/869DMN](#) [PH9085.011NL](#) [PE-0603CD060KTT](#) [H1086NLT](#) [P0182T](#) [PA1494.442NL](#) [PE-0805CD030KTT](#) [PE-53363NLT](#) [23Z106SM-T](#) [HX5400NL](#) [JXD0-4005NL](#) [ST6200QNL](#) [T3001NL](#) [HX2019](#) [PE-67540NL](#) [PE-65968NL](#) [PE-65535NL](#) [T1142NLT](#) [H7019FNL](#) [P0841NL](#) [P0438T](#) [P0584](#) [P0752.474T](#) [P1167.154T](#) [STQN1553-45](#) [JY0-0016NL](#) [JG0-0098NL](#) [JG0-0025NL](#) [J20-0014NL](#) [W1911](#) [HX6101NL](#) [JXD1-0025NL](#) [RO2408NMD](#) [P0469NL](#) [P0841SNLT](#) [PB2134NL](#) [ST2-12B42](#) [PE-0805CM331JTT](#) [PE-51509NL](#) [53119](#) [J3026G01DNL](#) [P0849SNL](#) [W3012-K](#) [HX5020NL](#) [HX5201NL](#) [PE-68210NL](#) [T1124NL](#) [H5004NL](#) [JX30-0005NL](#)