
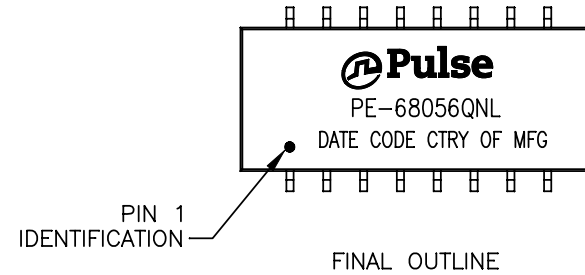
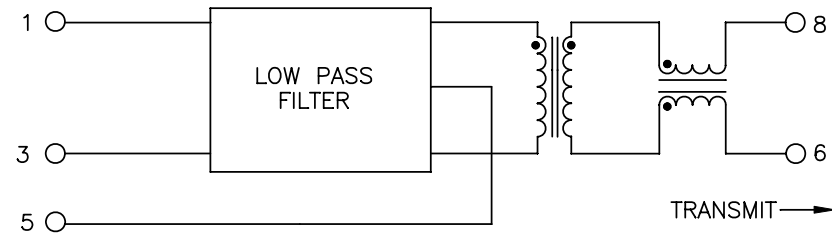
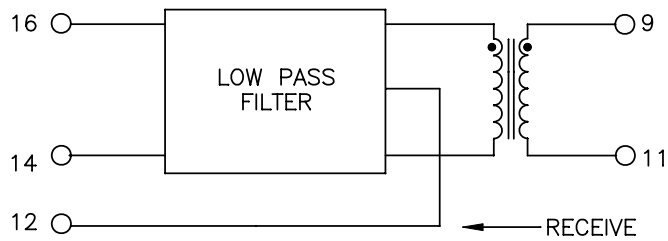


NOTICE:	THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.
RoHS 	ALL ENGINEERING CHANGES MUST HAVE PRIOR APPROVAL BY THE DESIGN CENTER.



Electrical @ 25°C



SCHEMATIC



PARAMETER	SPECIFICATIONS								
	TX				RX				
INSERTION LOSS	5 - 10 MHz	25 MHz	30-40 MHz	100 MHz	5 - 10 MHz	25 MHz	30 MHz	40 MHz	100 MHz
	-1.0 dB MAX	-15 dB MIN	-27 dB MIN	-27 dB MIN	-1.0 dB MAX	-8 dB MIN	-25 dB MIN	-19 dB MIN	-25 dB MIN
RETURN LOSS (Z OUT = 100 OHM)	5 MHz		10 MHz		5 MHz		10 MHz		
	-19 dB MIN		-18 dB MIN		-23 dB MIN		-20 dB MIN		
CROSSTALK, ADJACENT CHANNELS (TX TO RX)	5 MHz		10 MHz		30-50MHz		100 MHz		
	-35 dB MIN		-30 dB MIN		-30 dB MIN		-30 dB MIN		
COMMON MODE REJECTION RATIO	5 MHz	10 MHz	50 MHz	100 MHz	5 MHz	10 MHz	50 MHz	100 MHz	
	-40 dB MIN	-30 dB MIN	-50 dB MIN	-45 dB MIN	-40 dB MIN	-30 dB MIN	-45 dB MIN	-45 dB MIN	
INPUT - OUTPUT ISOLATION	1500 VRMS MIN @ 60 SECONDS								

NOTE: f IS FREQUENCY IN MHz.



NOTE: TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX TO THE PART NUMBER(i.ePE-68056QNL BECOMES PE-68056QNL T).

© Copyright, 2010. Pulse Electronics Corp. All rights reserved. Drawing specifications subject to change without notice. (10/17/11)

PULSE CONFIDENTIAL & PROPRIETARY	PRODUCT DESCRIPTION	PS DRAWING	SHEET:	DWG. NO./ PART NO.	REV.
	MDL,SIN,10F,1:1,SMT	PS-2470.001-A	1	PE-68056QNL	M16

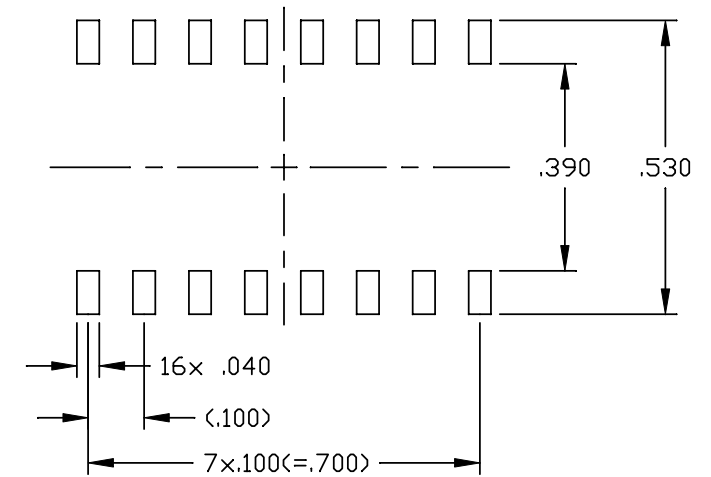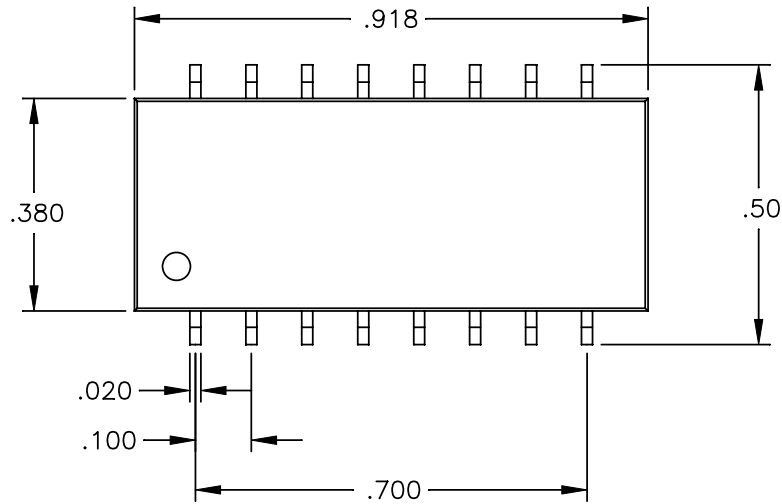

SUGGESTED LAND PATTERN

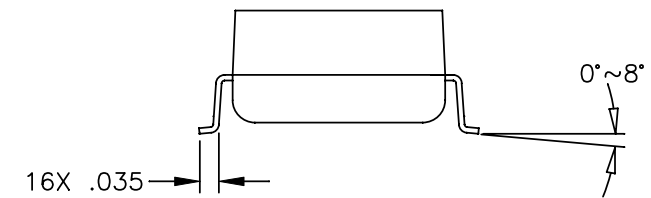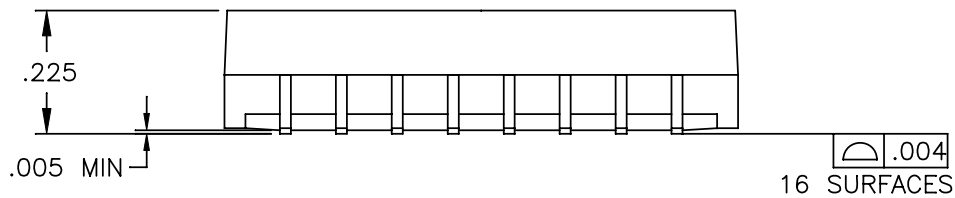

NOTE: TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX TO THE PART NUMBER(i.ePE-68056QNL BECOMES PE-68056QNL T).

© Copyright, 2010. Pulse Electronics Corp. All rights reserved. Drawing specifications subject to change without notice. (10/17/11)

PULSE CONFIDENTIAL
&
PROPRIETARY

PRODUCT DESCRIPTION
MDL,SIN,10F,1:1,SMT

PS DRAWING
PS-2470.001-A

SHEET:
2

DWG. NO./ PART NO.
PE-68056QNL

REV.
M16

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [Pulse manufacturer](#):

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5079NLT](#) [H5084FNLT](#)
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#)
[1879732-1](#)