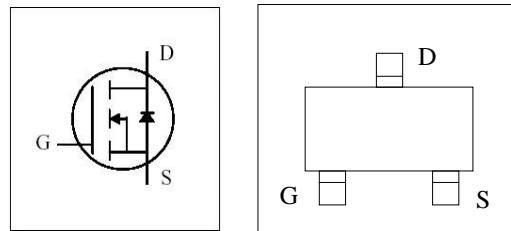
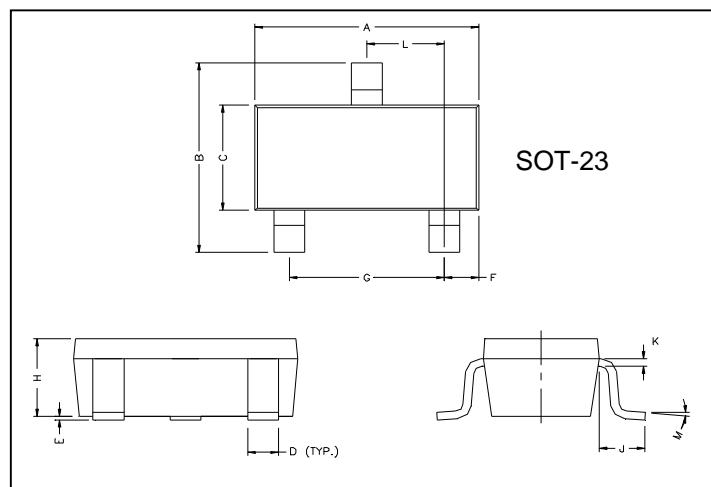


**V<sub>DS</sub> = 20V****R<sub>D(S)</sub>(ON), V<sub>GS</sub>@ 4.5V, I<sub>DS</sub>@ 2.0A < 50mΩ****R<sub>D(S)</sub>(ON), V<sub>GS</sub>@ 2.5V, I<sub>DS</sub>@ 1.0A < 80mΩ****Features**

Advanced trench process technology

High Density Cell Design For Ultra Low On-Resistance

**Package Dimensions**

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.80	3.00	G	1.80	2.00
B	2.30	2.50	H	0.90	1.1
C	1.20	1.40	K	0.10	0.20
D	0.30	0.50	J	0.35	0.70
E	0	0.10	L	0.92	0.98
F	0.45	0.55	M	0°	10°

**Maximum Ratings and Thermal Characteristics (TA = 25°C unless otherwise noted)**

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V <sub>DS</sub>	20	V
Gate-Source Voltage	V <sub>GS</sub>	±12	
Continuous Drain Current	I <sub>D</sub>	2.3	A
Pulsed Drain Current <sup>1)</sup>	I <sub>DM</sub>	6	
Maximum Power Dissipation <sup>2)</sup>	P <sub>D</sub>	0.6	W
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to 150	°C

## Notes







1) Pulse width limited by maximum junction temperature.


2) Surface Mounted on FR4 Board, t ≤ 5 sec.

## ELECTRICAL CHARACTERISTICS


Parameter	Symbol	Test Condition	Min.	Typ.	Miax.	Unit
<b>Static</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	20			V
Drain-Source On-State Resistance <sup>1)</sup>	$R_{DS(on)}$	$V_{GS} = 4.5V, I_D = 2A$			50	$m\Omega$
		$V_{GS} = 2.5V, I_D = 1A$			80	
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	0.6		1.1	V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = 19.5V, V_{GS} = 0V$			1	$\mu A$
Gate Body Leakage	$I_{GSS}$	$V_{GS} = 12V, V_{DS} = 0V$			100	nA
Forward Transconductance <sup>1)</sup>	$g_{fs}$	$V_{DS} = 5V, I_D = 2.3A$		10	—	S
<b>Dynamic</b>						
Total Gate Charge	$Q_g$	$V_{DS} = 10V, I_D = 2.3A$		5.4		nC
Gate-Source Charge	$Q_{gs}$			0.65		
Gate-Drain Charge	$Q_{gd}$			1.6		
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = 10V, RL = 5.5\Omega$		12		ns
Turn-On Rise Time	$t_r$			36		
Turn-Off Delay Time	$t_{d(off)}$			34		
Turn-Off Fall Time	$t_f$	$R_G = 6\Omega$		10		
Input Capacitance	$C_{iss}$			340		pF
Output Capacitance	$C_{oss}$			115		
Reverse Transfer Capacitance	$C_{rss}$			33		
Diode Forward Voltage	$V_{SD}$	$I_S = 1.0A, V_{GS} = 0V$			1.2	V

<sup>1)</sup> Pulse test: pulse width <= 300us, duty cycle<= 2%

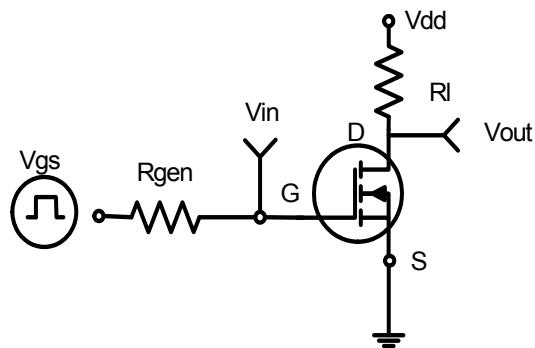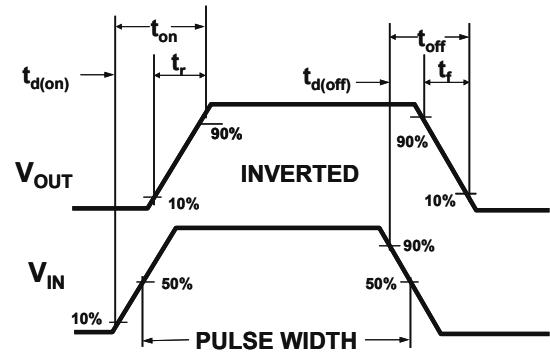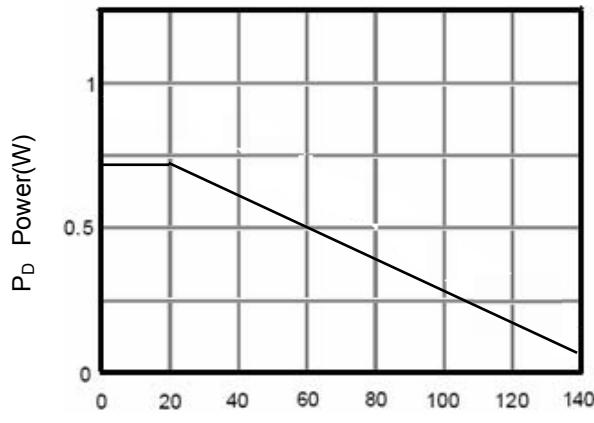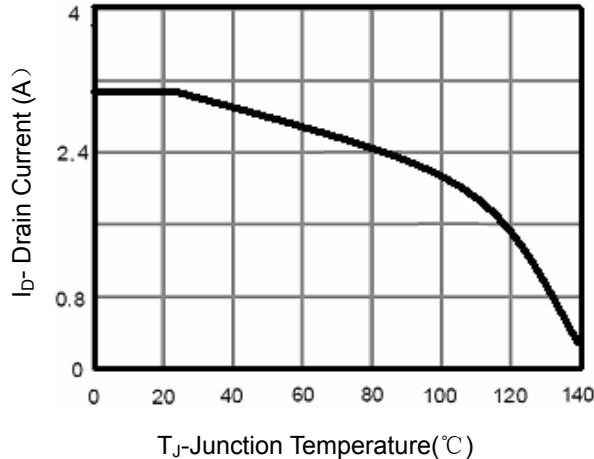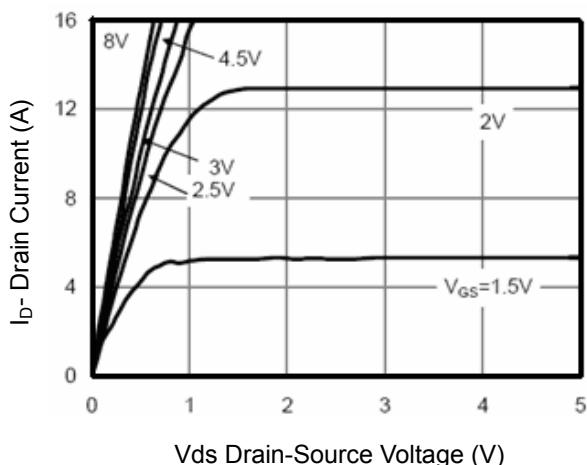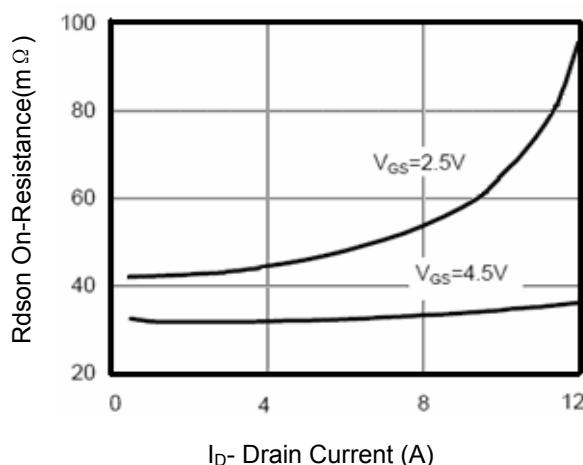
**Typical Electrical and Thermal Characteristics****Figure 1:Switching Test Circuit****Figure 2:Switching Waveforms****Figure 3 Power Dissipation****Figure 4 Drain Current****Figure 5 Output Characteristics****Figure 6 Drain-Source On-Resistance**

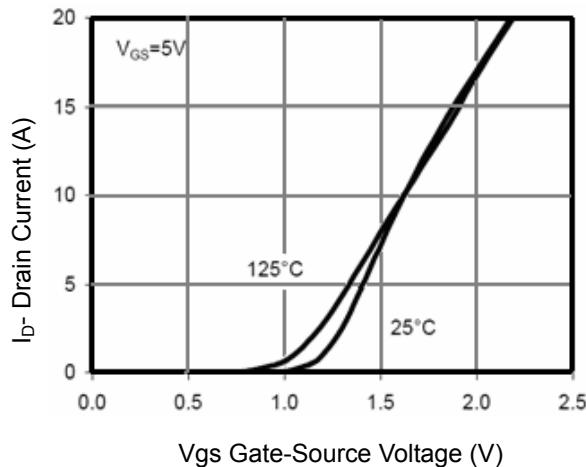


**Figure 7 Transfer Characteristics**

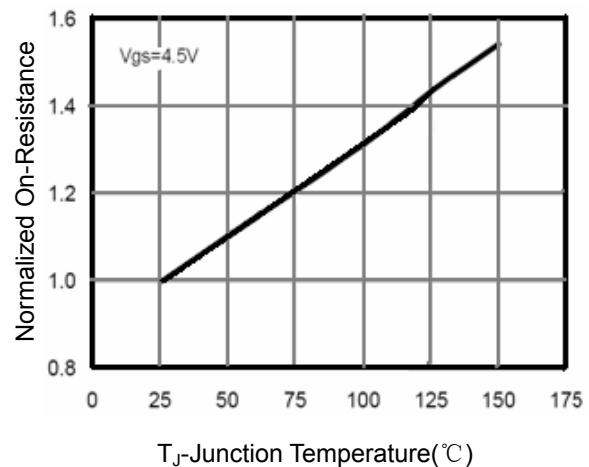


**Figure 8 Drain-Source On-Resistance**

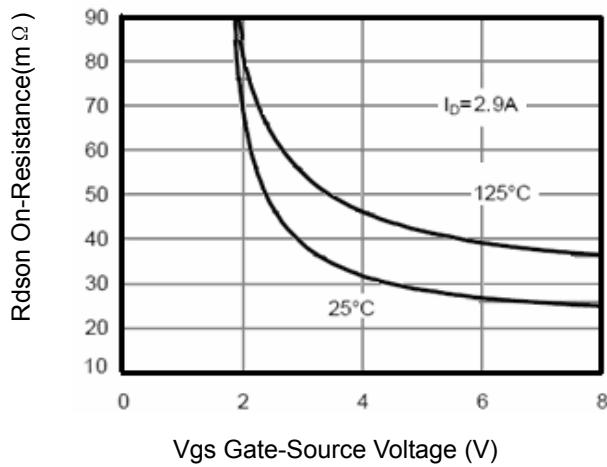


**Figure 9  $R_{DS(on)}$  vs  $V_{GS}$**

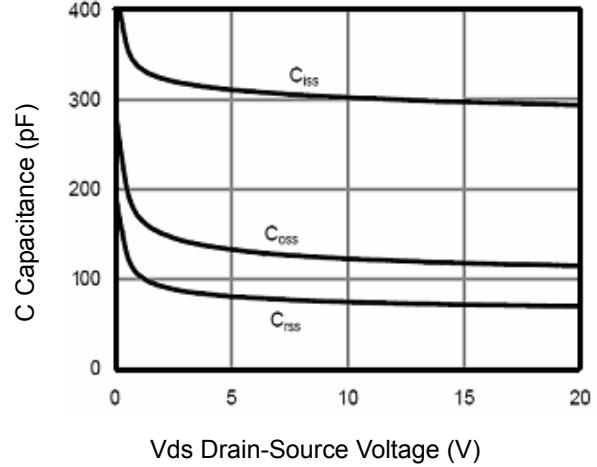

**Figure 10 Capacitance vs  $V_{DS}$**

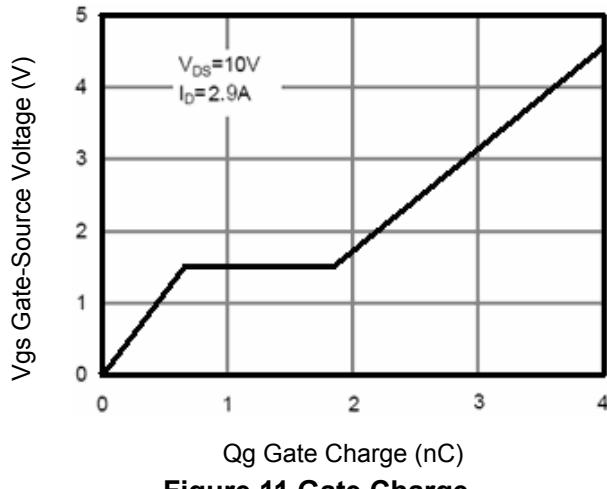

**Figure 11 Gate Charge**

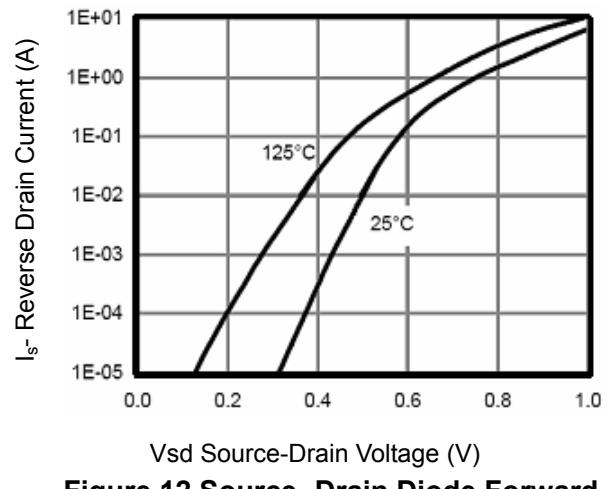

**Figure 12 Source-Drain Diode Forward**

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET category:***

***Click to view products by PUOLOP manufacturer:***

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)  
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T\)](#) [751625C](#) [BSC884N03MS G](#) [BSF024N03LT3 G](#)  
[PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-](#)  
[7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#)  
[SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#)  
[C3M0021120D](#) [DMN13M9UCA6-7](#) [BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IRF40SC240ARMA1](#)  
[IPS60R1K0PFD7SAKMA1](#)