

Note:

1.Material:


- 1.1 Insulator: LCP/PBT UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Brass或 K7, t=0.30mm.

2.Specification:

- 2.1 Rated voltage and current:1.5A at 250V AC minimum.
- 2.2 Dielectric withstanding voltage: 500V AC/1 minute without breakdown.
- 2.3 Contact resistance:Before life test 30m ohm max,  
After life tset 50m ohm max.
- 2.4 Insulation resistance:1000M ohm min.
- 2.5 Insertion force:35 Newtons maximum.
- 2.6 Extraction force:10 Newtons minimum.
- 2.7 Solderability:Terminal shall be immersed in flux before text,Then dip in molten solder for 5±0.5 sec. At 245±5°C.

3.Finishes:

- 3.1 Contacts:Gold flashed 1u", 30u".
- 3.2 Shell: Nickel plated.

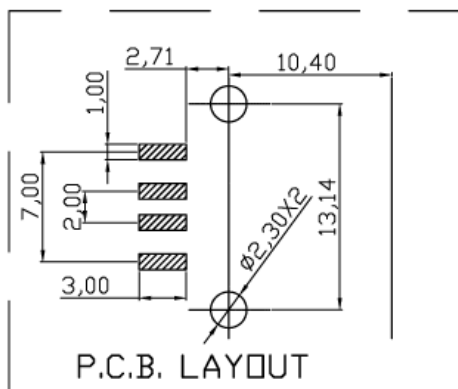

3	SHELL	1	K7\ BRASS	T=0.30±0.02mm	Nickel Plated
2	CONTACT	5	BRASS	T=0.25±0.02mm	30u"
1	HOUSING	1	LCP/P.B.T		Black White
No.	Part Name	Q'ty	Material	Thickness	Finish

TOLERANCE (mm)	X.	±0.3	DRAWN Stephane	DATE 2006/02/11	TITLE USB A Type SMT R/A	AMPHENOL Amphenol European Design Center		
	XX	±0.2					CHECKED Rob	2006/02/11
	X.XX	±0.15					APPROVED Rob	2006/02/11
	UNLESS OTHERWISE SPECIFIED							
			UNIT: mm	SIZE: A4	DRAWING N°: TUEA4F2SXXXX	Scale N.A.	Sheet 1 of 1	
						REV. A		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [USB Cables / IEEE 1394 Cables](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[68768-0173](#) [FNY-W6003-01](#) [88764-0800](#) [13805532](#) [148700-1](#) [17-200621](#) [17-250051P](#) [954](#) [AC102012-2](#) [IP-USB1\(C10\)S-RW](#)  
[CABLE/RTP/USB/DT](#) [0847290003](#) [10115240-12200LF](#) [RS232-GTD](#) [USBFTVX2SA2N03A](#) [USBFTV2SA2N03A](#) [1689404-1](#) [FTP-](#)  
[629Y401](#) [FTP-628Y402](#) [943301-001](#) [FNY-W6022](#) [FNY-W6003-03](#) [1310-1015-05](#) [1310-1018-04](#) [1310-1019-04](#) [0887283402](#) [UA-](#)  
[30AMFM-SL7B02](#) [UA-30AMFM-SL7B01](#) [UA-30AFM-LD7B03](#) [UA-30AMFM-SL7B03](#) [USBAPSCC7202A](#) [UES-1001A160](#) [UES-](#)  
[1003A160](#) [USBFTVX7SA2N20A](#) [USBFTVX2SA2N20A](#) [USBFTV2PEMSA2N10A](#) [FTP-629Y602](#) [USBCAMCM100](#) [USB A/F\\*2 to 2.54](#)  
[2\\*5P-SH L=400mm](#) [EP-CBUSB10P2FLT](#) [1310-1033-01](#) [1310-1037-04](#) [ASR-USB](#) [68784-0075](#) [17-241361](#) [17-230471](#) [217B-BC02](#) [USB-29](#)  
[19800-010500-200-RS](#) [USB+MINI DIN 6P WITH BKT](#)