



## Trailing Edge Dimmer

### Product description

**PX741 is an intelligent transistor dimmer with phase cutting where control is carried out on the falling edge (the so-called trailing edge dimming)**

The module controls four channels 200VA each and has an built-in system of interference suppression, fuses and signal controls. The device has the DMX512 input, analogue inputs 0-10 V or a possibility to link outer buttons and control them in compliance with one of four functions. The dimmer offers a lot of possibilities to adjust the control characteristic.

Each of the four output channels can be configured individually.

The settings consist of the following parameters:

- the control mode (DMX, analogue, buttons)
- DMX address
- the reaction to the lack of the DMX signal
- the choice of key functions together with the full regulation of reaction time
- advanced functions and parameters allowing to adjust control to the type and characteristic of capacity (a minimum and maximum level of control, a characteristic curve, a function of pre-glow)

The dimmer is designated to work with capacity of R and RC types:



- dimmable LED bulbs
- LEDs connected with a dimmable adapter of the CC type
- traditional bulbs
- halogen bulbs 230 V
- halogen bulbs 12 V connected with the dimmable electronic transformer

The device is closed in the standard housing of the width of 105 mm, designated for bar assembling.

### Technical data


Type:	PX741
Power supply:	230V / 50Hz
Max. power consumption:	4A
Control inputs:	0 - 10 V or DMX512 or Monostable buttons
Power consumption inputs 0 - 10V:	0,1mA
Dimensions:	Width: 105 mm Height: 58 mm Depth: 90 mm

Connection scheme

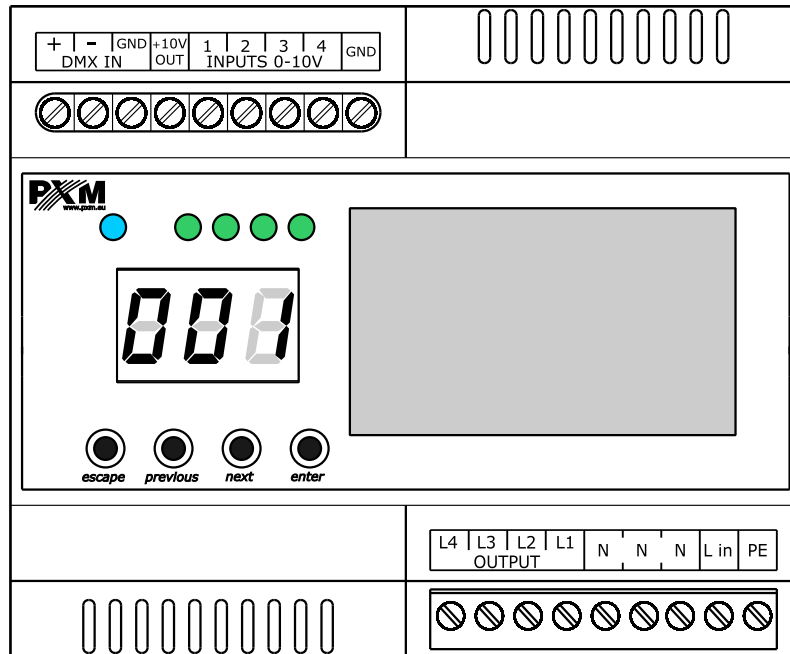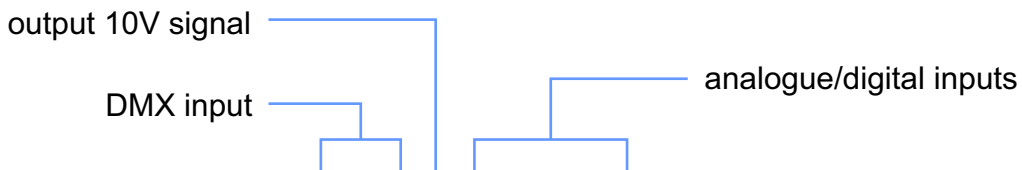

Supply connector (starting from the left L4, L3, L2, L1, 3xN, L in and PE) L1-L4 are the output (controlled) phases

Technical drawing

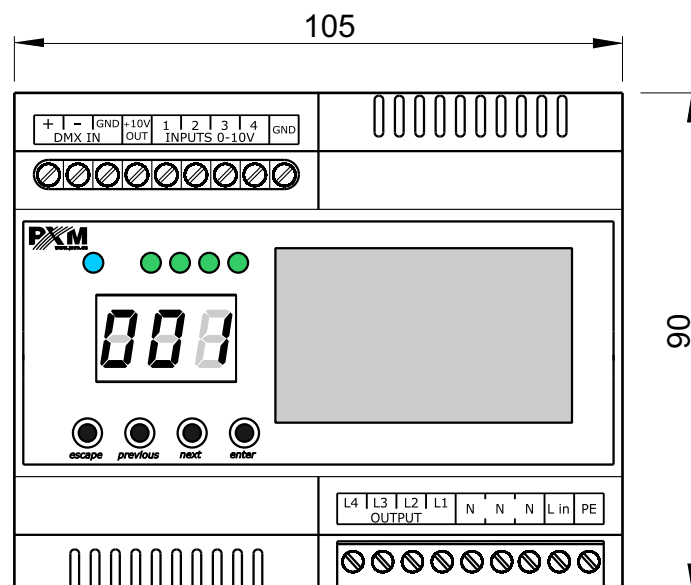

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [PXM](#) manufacturer:*

Other Similar products are found below :

[ESS015W-1000-12](#) [EUC-075S105DT](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [SLM160W-3.9-40-ZA](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS040W-1400-27](#) [ESS015W-0700-18](#) [ESS010E-0250-42](#) [EVM120W-2700-42-ECN2](#) [EDC-100S105SV-0007](#) [79278](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [50304](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [OT FIT 50/220-240/300 D L](#) [OT FIT 35/220-240/350 D CS L](#) [OT FIT 65/220-240/350 D CS L](#) [ELEMENT 30/220-240/700 S](#) [LC 75W 100-400MA 1-10V LP EXC](#) [LCA 35W 150-700MA ONE4ALL LP PRE](#) [LCA 50W 100-400MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA 2XCH LP PRE](#) [LCI 150/325-1050/300 O4A SL PRE](#) [LCA 75W 100-400MA ONE4ALL LP PRE](#) [LCA 45W 500-1400MA ONE4ALL SC PRE](#) [LC 50W 100-400MA FLEXC LP EXC](#) [LCA 75W 350-1050MA ONE4ALL LP PRE](#) [LC 50W 350-1050MA FLEXC LP EXC](#) [LC 75W 350-1050MA FLEXC LP EXC](#) [LCA 75W 900-1800MA ONE4ALL LP PRE](#)